

UGKO — KUTAISI/KOPITNARI

UGKO AD 2.1 Aerodrome location indicator and name

UGKO — KUTAISI/KOPITNARI

UGKO AD 2.2 Aerodrome geographical and administrative data

1	ARP coordinates and site at AD	421037N 0422858E RWY 07/25 centre line
2	Direction and distance from city	21 KM SW from Kutaisi centre
3	Elevation/Reference temperature	160 FT/30° C
4	Geoid undulation at AD ELEV PSN	61 FT
5	MAG VAR/Annual change	7° E (2021)/NIL
6	AD Administration, address, telephone, telefax, telex, AFS	LTD UNITED AIRPORTS OF GEORGIA Post: Airport, Isani-Samgori District 0158 TBILISI GEORGIA Tel: +995322487300, +995599038930 Email: operationcckutaisi@airports.ge Email: info@airports.ge Email: infodesk@airports.ge AFS: UGKOGNXX AFS: UGKOAPXX
7	Types of traffic permitted (IFR/VFR)	IFR/VFR
8	Remarks	Phone: +995599038930 operation H24

UGKO AD 2.3 Operational hours

1	AD Administration	MON-FRI from 05:30 to 14:00
2	Customs and immigration	H24
3	Health and sanitation	Health: H24 Sanitation: H24
4	AIS Briefing Office	H24
5	ATS Reporting Office (ARO)	H24
6	MET Briefing Office	H24
7	ATS	KUTAISI APP: H24 KUTAISI TWR: H24
8	Fuelling	H24
9	Handling	H24
10	Security	H24
11	De-icing	H24
12	Remarks	NIL

UGKO AD 2.4 Handling services and facilities

1	Cargo-handling facilities	NIL
2	Fuel/oil types	Fuel: Jet A-1, TC-1/TS-1 (GOST 10227) Oil: NIL

3	Fuelling facilities/capacity	LLC Georgian Petroleum 3 refuelling truck: 1. Ford 11350 litres (3000 gallons), Flow Rate 1135 litres/minute; 2. Mercedes 26000 litres (5719 gallons), Flow Rate 1100 litres/minute; 3. Freightliner 21000 litres (4619 gallons), Flow Rate 1000 litres/minute Tel: (+995599)514704, (+995577)103275 Email: kutaisi@airgp.ge
4	De-icing facilities	Available - GS 800, Volvo LDM THY Aircraft Deicer
5	Hangar space for visiting aircraft	NIL
6	Repair facilities for visiting aircraft	NIL
7	Remarks	NIL

UGKO AD 2.5 Passenger facilities

1	Hotels	Available in the city
2	Restaurants	Available in the city
3	Transportation	Taxis and Shuttle Buses from the AD
4	Medical facilities	First medical aid at AD, hospitals in the city
5	Bank and Post Office	Bank: Available Post: NIL
6	Tourist Office	Available
7	Remarks	NIL

UGKO AD 2.6 Rescue and fire fighting services

1	AD category for fire fighting	CAT 7
2	Rescue equipment	2 Fire trucks
3	Capability for removal of disabled aircraft	Available for Airbus A321
4	Remarks	Responsible person's details: Mob: +995595078017 Email: t.shalamberidze@airports.ge

UGKO AD 2.7 Seasonal availability - clearing

1	Types of clearing equipment	1 Snow Blower; 3 Snow Ploughs; 1 Scraper; 1 Sand Spreader
2	Clearance priorities	1. RWY 07/25 and associated TWY to apron 2. Apron 3. Access roads to the airport rescue service
3	Remarks	The snow plan and friction measuring details see in section AD 1.2.2

UGKO AD 2.8 Aprons, taxiways and check locations/positions data

1	Apron surface and strength	Designation	Surface	Strength	
		APRON	Concrete and asphalt	65/F/C/X/T	
2	Taxiway width, surface and strength	Designation	Width	Surface	Strength
		TWY A	23 M	Concrete and asphalt	65/F/C/X/T
		TWY B	18 M	Concrete and asphalt	57/F/A/X/T
3	ACL location and elevation	APRON - Elevation 137.8 FT			

4	VOR checkpoints	NIL
5	INS checkpoints	INS: See Aerodrome chart UGKO-ADC
6	Remarks	NIL

UGKO AD 2.9 Surface movement guidance and control system and markings

1	Aircraft stand ID signs TWY guide lines Visual docking/parking guidance system	Sign board at intersection of TWY with RWY. Guide lines at apron.
2	RWY and TWY markings and LGT	RWY : Designation, THR, TDZ, centreline, edge line, RWY end marked as appropriate. Centreline, edge line, THR are lighted. TWY : Centre line, edge line marked as appropriate. Edge line is lighted.
3	Stop bars	NIL
4	Remarks	NIL

UGKO AD 2.10 Aerodrome Obstacles

In Area 2a

Designator	Type	Coordinates	ELEV	HGT	Marking/LGT type, colour	Remarks
1	2	3	4	5	6	7
UGKO2A001	Antenna	421027.6N 0422817.9E	189 FT	NIL	LGT: Red	07 GP
UGKO2A002	Antenna	421027.2N 0422814.7E	152 FT	NIL	LGT: Red	NFM 07 GP
UGKO2A003	Pole	421028.4N 0422818.2E	155 FT	NIL	LGT: Red	07 Windsock
UGKO2A004	Pole	421027.9N 0422819.9E	173 FT	NIL	LGT: Red	07 Wind Sensor
UGKO2A005	Pole	421031.5N 0422858.9E	181 FT	NIL	LGT: Red	Middle Wind Sensor
UGKO2A006	Navaid	421032.5N 0422905.3E	175 FT	NIL	LGT: Red	DVOR/DME
UGKO2A007	Antenna	421033.0N 0422908.7E	174 FT	NIL	LGT: Red	DVOR/DME Control
UGKO2A008	Antenna	421038.1N 0422941.9E	174 FT	NIL	LGT: Red	NFM 25 GP
UGKO2A009	Antenna	421037.6N 0422938.0E	210 FT	NIL	LGT: Red	25 GP
UGKO2A010	Pole	421038.1N 0422937.4E	175 FT	NIL	LGT: Red	25 Windsock
UGKO2A011	Pole	421037.3N 0422935.6E	175 FT	NIL	LGT: Red	25 Wind Sensor

In Area 2b

Designator	Type	Coordinates	ELEV	HGT	Marking/LGT type, colour	Remarks
1	2	3	4	5	6	7
UGKO2B001	Antenna	421044.6N 0423004.4E	163 FT	NIL	LGT: Red	ILS LOC 07
UGKO2B002	Antenna	421028.4N 0422750.9E	130 FT	NIL	LGT: Red	ILS LOC 25

In Area 2c

Designator	Type	Coordinates	ELEV	HGT	Marking/LGT type, colour	Remarks
1	2	3	4	5	6	7
UGKO2C001	Building	421040.6N 0422815.7E	172 FT	NIL	NIL	Meteo Building
UGKO2C002	Antenna	421040.8N 0422816.8E	193 FT	NIL	NIL	Meteo 1
UGKO2C003	Antenna	421041.6N 0422815.9E	193 FT	NIL	NIL	Meteo 2
UGKO2C004	Antenna	421040.6N 0422815.2E	197 FT	NIL	NIL	Meteo 3
UGKO2C005	Antenna	421046.6N 0422819.5E	181 FT	NIL	NIL	Fire Fighting Depo
UGKO2C006	Pole	421053.6N 0422803.7E	243 FT	NIL	NIL	Light Mast 1
UGKO2C007	Pole	421050.8N 0422805.0E	241 FT	NIL	NIL	Light Mast 2
UGKO2C008	Pole	421049.7N 0422800.8E	241 FT	NIL	NIL	Light Mast 3
UGKO2C009	Pole	421048.7N 0422756.6E	241 FT	NIL	NIL	Light Mast 4
UGKO2C010	Pole	421051.5N 0422755.3E	244 FT	NIL	NIL	Light Mast 5
UGKO2C011	Pole	421052.6N 0422759.5E	244 FT	NIL	NIL	Light Mast 6
UGKO2C012	Building	421053.6N 0422752.1E	196 FT	NIL	NIL	Terminal
UGKO2C013	Control Tower	421056.3N 0422803.3E	333 FT	NIL	LGT: Red	ATC Building
UGKO2C014	Antenna	421051.9N 0422751.1E	205 FT	NIL	NIL	Ops Building
UGKO2C015	Pole	421051.7N 0422736.3E	225 FT	NIL	NIL	Light Mast

In Area 3

Designator	Type	Coordinates	ELEV	HGT	Marking/LGT type, colour	Remarks
1	2	3	4	5	6	7
UGKO3001	General Utility	421032.7N 0422816.9E	139.0 FT	NIL	NIL	PAPI 07
UGKO3002	Sign	421047.5N 0422753.6E	137.0 FT	NIL	NIL	Apron Sign on Apron
UGKO3003	Sign	421039.8N 0422800.9E	137.0 FT	NIL	NIL	TWY "A" Sign on TWY
UGKO3004	Sign	421033.7N 0422802.3E	137.0 FT	NIL	NIL	TWY "A" Holding Position Sign 1
UGKO3005	Sign	421034.0N 0422805.0E	137.0 FT	NIL	NIL	TWY "A" Holding Position Sign 2
UGKO3006	Sign	421032.1N 0422808.8E	137.0 FT	NIL	NIL	TWY "A" Sign on RWY
UGKO3007	General Utility	421040.3N 0422937.3E	160.0 FT	NIL	NIL	PAPI 25
UGKO3008	Sign	421034.9N 0422834.6E	143.0 FT	NIL	NIL	TWY "B" Sign 1 on RWY
UGKO3009	Sign	421033.7N 0422825.2E	141.0 FT	NIL	NIL	TWY "B" Sign 2 on RWY
UGKO3010	Sign	421035.6N 0422827.6E	142.0 FT	NIL	NIL	TWY "B" Holding Position Sign 1
UGKO3011	Sign	421036.3N 0422830.0E	142.0 FT	NIL	NIL	TWY "B" Holding Position Sign 2

Designator	Type	Coordinates	ELEV	HGT	Marking/LGT type, colour	Remarks
1	2	3	4	5	6	7
UGKO3012	Sign	421040.1N 0422825.3E	142.0 FT	NIL	NIL	TWY "B" Sign 1 on TWY
UGKO3013	Sign	421045.5N 0422816.4E	142.0 FT	NIL	NIL	TWY "B" Sign 2 on TWY
UGKO3014	Sign	421043.6N 0422815.9E	142.0 FT	NIL	NIL	TWY "B" Sign 3 on TWY
UGKO3015	Sign	421047.0N 0422811.1E	142.0 FT	NIL	NIL	TWY "B" Sign 4 on TWY
UGKO3016	Sign	421047.0N 0422808.3E	142.0 FT	NIL	NIL	Apron Sign 1 on TWY "B"
UGKO3017	Sign	421049.8N 0422809.2E	142.0 FT	NIL	NIL	Apron Sign 2 on TWY "B"

UGKO AD 2.11 Meteorological information provided

1	Associated MET Office	KUTAISI
2	Hours of service MET Office outside hours	H24 -
3	Office responsible for TAF preparation Periods of validity	KUTAISI 24 HR
4	Trend forecast Interval of issuance	TREND 0.5 HR
5	Briefing/consultation provided	Personal consultation and telephone consultation
6	Flight documentation Language(s) used	Charts, tabular form, abbreviated plain language text English
7	Charts and other information available for briefing or consultation	S, U85, U70, U50, U30, U20, P85, P70, P50, P40, P30, P20, SWH, SWM, T
8	Supplementary equipment available for providing information	NIL
9	ATS units provided with information	Kutaisi TWR, APP; Tbilisi ACC
10	Additional information (limitation of service etc.)	NIL

UGKO AD 2.12 Runway physical characteristics

RWY Designations	TRUE BRG	Dimensions of RWY	Strength (PCN) and surface of RWY and SWY	THR & RWY end coordinates THR geoid undulation	THR elevation and highest elevation of TDZ of precision APP RWY
1	2	3	4	5	6
07	080.45°	2500 M x 45 M	55/F/C/X/T Concrete and asphalt	THR: 421029.85N 0422804.04E GUND: 61.4 FT END: 421043.27N 0422951.43E	THR: 133.4 FT TDZ: 142.8 FT
25	260.45°			THR: 421043.27N 0422951.43E GUND: 61.4 FT END: 421029.85N 0422804.04E	THR: 160.3 FT TDZ: NIL

Slope of RWY-SWY	SWY dimensions	CWY dimensions	Strip dimensions	RESA dimensions	Arresting System	OFZ	Remarks
7	8	9	10	11	12	13	14
0.30%	60 M x 45 M	250 M x 150 M	2740 M x 300 M	240 M x 150 M	NIL	Yes	NIL
-0.30%	60 M x 45 M	250 M x 150 M		200 M x 150 M	NIL	Yes	NIL

UGKO AD 2.13 Declared distances

RWY Designator	TORA	TODA	ASDA	LDA	Remarks
1	2	3	4	5	6
07	2500 M	2750 M	2560 M	2500 M	NIL
25	2500 M	2750 M	2560 M	2500 M	NIL

UGKO AD 2.14 Approach and runway lighting

RWY Designator	APCH LGT type LEN INTST	RTHL colour WBAR	VASIS (MEHT) PAPI	RTZL LEN	RCLL LEN, spacing, colour, INTST	REDL LEN, spacing, colour, INTST	RENL colour, WBAR	STWL LEN, colour	Remarks
1	2	3	4	5	6	7	8	9	10
07	HIALS 900 M LIH	Green	PAPI Left/3.0° (52 FT)	NIL	NIL	2500 M 60 M White; FM 1900 M Yellow LIH	Red	NIL	NIL
25	HIALS 900 M LIH	Green	PAPI Left/3.0° (51 FT)	NIL	NIL	2500 M 60 M White; FM 1900 M Yellow LIH	Red	NIL	NIL

UGKO AD 2.15 Other lighting and secondary power supply

1	ABN/IBN location, characteristics and hours of operation	ABN: At Tower building, rotating light beacon, RPM 12, code W / G, SS-SR IBN: NIL
2	LDI location and LGT Anemometer location and LGT	NIL
3	TWY edge and centre line lighting	Edge: TWY A, TWY B
4	Secondary power supply/switch-over time	Secondary power supply to all lighting at AD. Switch-over time: 1 SEC
5	Remarks	NIL

UGKO AD 2.16 Helicopter landing area

1	Coordinates TLOF or THR of FATO	NIL
	Geoid undulation	NIL
2	TLOF and/or FATO elevation	NIL
3	TLOF and FATO area dimensions, surface, strength, marking	NIL
4	True BRG of FATO	NIL
5	Declared distance available	NIL
6	APP and FATO lighting	NIL
7	Remarks	NIL

UGKO AD 2.17 Air traffic services airspace

1	Designation, lateral limits, vertical limits	KUTAISI CTR 421449N 0422206E 421532N 0422751E 421615N 0423335E 421538N 0424048E 420843N 0424220E 420623N 0423548E 420457N 0422420E 420557N 0422005E 420534N 0421710E 421228N 0421535E 421449N 0422206E 1500 FT AMSL GND
2	Airspace classification	C
3	Call sign Languages	KUTAISI TOWER English
4	Transition altitude	7000 FT MSL
5	Remarks	NIL

UGKO AD 2.18 Air traffic services communication facilities

Service designation	Call sign	Channel	SATVOICE	Logon address	Hours of operation	Remarks
1	2	3	4	5	6	7
APP	KUTAISI APPROACH	127.100 MHz	NIL	NIL	H24	NIL
TWR	KUTAISI TOWER	125.500 MHz	NIL	NIL	H24	NIL

UGKO AD 2.19 Radio navigation and landing aids

Type of aid CAT of ILS/MLS (MAG VAR)	ID	Frequency	Hours of operation	Transmitting antenna coordinates	Elevation of DME transmitting antenna	Service volume radius from GBAS reference point	Remarks
1	2	3	4	5	6	7	8
DVOR/DME (7°E/2021)	KTS	113.600 MHZ (CH 83X)	H24	421032.6N 0422905.3E	200 FT	NIL	NIL
LOC 07 (7°E/2021) ILS CAT I	IKS	110.100 MHZ	H24	421044.9N 0423004.4E	Not applicable	NIL	NIL
GP 07	—	334.400 MHZ	H24	421027.6N 0422817.8E	Not applicable	NIL	NIL
DME 07	IKS	CH 38X	H24	421027.6N 0422817.8E	200 FT	NIL	Omnidirectional Coverage range up to 25 NM
LOC 25 (7°E/2021) ILS CAT I	IKO	108.700 MHZ	H24	421028.2N 0422751.1E	Not applicable	NIL	NIL
GP 25	—	330.500 MHZ	H24	421037.6N 0422938.0E	Not applicable	NIL	NIL
DME 25	IKO	CH 24X	H24	421037.6N 0422938.0E	200 FT	NIL	Omnidirectional Coverage range up to 25 NM

UGKO AD 2.20 Local aerodrome regulations

1 Airport regulations

To be developed.

2 Taxiing to and from stands

For all type of aircraft is prohibited to use minimum turn radius on RWY, TWY and apron.

On RWY 07/25 180 degree turn for aircraft with MTOW 35 tones and over on turn pad only.

A stand number of arriving aircraft will be allocated by the TWR. Assistance from the "FOLLOW ME" vehicle should be requested via the TWR.

Assistance from the "FOLLOW ME" vehicle should be available:

- when visibility is less then 400 M;
- while taxiing from RWY 07/25 to aircraft stand if wind speed is more than 29 KT (15 M/SEC);
- by pilot request.

Departing IFR and VFR flights shall contact TWR to obtain ATC clearance before commencing taxiing. Request for ATC clearance may take place at earliest 10 minutes prior to engine start-up.

Engine start-up and taxiing shall be carried out by the pilot-in-command only after receiving clearance from the appropriate ATC unit. Taxiing on the aerodrome maneuvering area shall be conducted in accordance with taxi procedures or as directed by the ATC unit. The pilot-in-command is responsible for meeting the norms established for taxiing with this type of aircraft.

While taxiing, the pilot-in-command shall be observing the area in front of him and take measures to avoid collisions with aircraft, motor vehicles and other obstacles. The pilot-in-command may not enter runway without clearance from the appropriate tower controller.

Taxiing from the holding position to the line-up and take-off shall be performed only after obtaining clearance from the tower controller.

The pilot-in-command shall take off within one minute after receiving the clearance from the ATC unit. If a take-off has not been carried out within the above mentioned time interval, the pilot-in-command shall request a new clearance.

Isolated aircraft stand with the coordinates 421043.683N 0422809.593E is available near the TWY B.

For those airplanes whose reference field length is 1500 m or over, during poor runway braking action being reported, because of insufficient longitudinal coefficient of friction, landing or take-off is forbidden if crosswind component exceeds 24 km/h (13 kt).

3 Parking area for small aircraft (General aviation)

General aviation aircraft shall be directed by marshallers to the parking.

4 Parking area for helicopters

Helicopters shall always be directed to the stand by a marshaller.

5 Apron – taxiing during winter conditions

Generally, apron, TWY, and RWY are not snow-covered during winter.

6 Taxiing – limitations

Taxiing speed limit on TWY A and TWY B is 25 KM/HR.

The washing area for aircraft is located on the aircraft parking stands 8 and 9.

7 School and training flights – technical test flights – use of runway

Educational and training flights can be made only after clearance from the TWR.

8 Helicopter traffic – limitation

Take-off and landing for all types of civil helicopters shall be carried out from/to RWY 07/25 only.

9 Removal of disabled aircraft from runway

When an aircraft is wrecked on a runway, it is the duty of the owner or user of such aircraft to have it removed as soon as possible. If a wrecked aircraft is not removed from the runway as quickly as possible by the owner or user, the aircraft will be removed by the aerodrome authority at the owner's or user's expense.

UGKO AD 2.21 Noise abatement procedures

Not applicable.

UGKO AD 2.22 Flight procedures

1 Procedures for IFR flights within Kutaisi TMA

1.1 General

ATS surveillance service within Kutaisi TMA is provided by Kutaisi approach unit (call sign "Kutaisi approach") on frequency 127.1 MHz.

Horizontal separation minimum applicable within Kutaisi TMA is 5 NM.

ATIS is not available. All pertinent information is provided by ATC.

1.2 Procedures for arrival flights

Arrival flight capable of RNAV1 (GNSS) will normally be cleared to follow appropriate RNAV STAR or will be given direct routings to the waypoints designated as initial approach fix of the ILS z (or LOC z) instrument approach procedures. Loss of RNAV1 (GNSS) capability shall be immediately reported to ATC.

Arrival flights not capable of RNAV1 (GNSS) will normally be vectored for ILS approach. Alternatively, direct routing to KTS (IAF) may be given followed by ILS y (or LOC y or VOR) instrument approach procedures. If a flight not capable of RNAV1 (GNSS) receives clearance to follow RNAV STAR or to proceed direct to a waypoint associated with ILS z (or LOC z) instrument approach procedures, the clearance shall be rejected and the reason stated: "UNABLE RNAV 1 (GNSS)".

Note: When vectored for ILS approach for RWY 07 expect glide path interception not below 3500 FT and for RWY 25 – not below 4500 FT (see also AD 2.UGKO-ATCSMAC chart).

Published speed restrictions on STARs and instrument approach procedures shall always be complied with. Controllers are not allowed to cancel published speed restrictions.

1.3 Procedures for departing flights

Departing flights capable of RNAV1 (GNSS) will normally be cleared to follow appropriate RNAV SID. Loss of RNAV1 (GNSS) capability shall be reported to ATC as soon as possible.

Departing flights not capable of RNAV1 (GNSS) will be cleared to follow appropriate conventional SID available for RWY 07 or will be instructed to "CONTINUE RUNWAY HEADING" (or "CLIMB STRAIGHT AHEAD") for RWY 25. If a flight not capable of RNAV1 (GNSS) receives clearance to follow RNAV SID, the clearance shall be rejected and the reason stated: "UNABLE RNAV 1 (GNSS)".

When cleared level requires an ACFT to level-off on SID, ATC Surveillance Minimum Altitudes will be respected by controller.

As an alternative to any SID of RWY 25, controller may instruct to "CONTINUE RUNWAY HEADING" or "CLIMB STRAIGHT AHEAD". In such cases standard climb gradient of 3.3 % or greater shall be maintained. Such instructions are not utilized for RWY 07.

Visual departures are not implemented.

1.4 FPL route options for arrivals and departures

Arrivals to UGKO:

STAR First Point	Available Routings	Remarks
BASKA *	...GUSLI DCT BASKA	-
EMBUS *	...LURIS DCT EMBUS	FRA (I) points may also be used between LURIS and EMBUS
	...KUFAN DCT EMBUS	FRA (I) points may also be used between KUFAN and EMBUS
	...ADEKI DCT EMBUS	FRA (I) points may also be used between ADEKI and EMBUS
	...TISOT DCT BT DCT EMBUS	-
	...OGEVI DCT BT DCT EMBUS	-
	...H7 EMBUS	Only available for departures from local airports
MAQGO *	...ROLIN DCT MAQGO	-
	...IDLER DCT MAQGO	-
	...BANUT DCT MAQGO	-
TUZZA *	...SARPI DCT TUZZA	-
	[SID] TUZZA	SID from UGSB to TUZZA
Direct ARR Point	Available Routings	Remarks
KTS *	...H5 KTS	Only available for departures from local airports
	...H7 KTS	

* G, M and X types of flight are not restricted by the routing options described in the table.

Note: Cleared levels assigned by ATC during descent on DCT segments will be based on relevant ATC Surveillance Minimum Altitude Charts.

Departures from UGKO:

SID Last Point	Available Routings	Remarks
KADZE *	KADZE DCT BANUT...	-
KUSSA	KUSSA DCT IZERO...	-
	KUSSA DCT ROLIN...	Only available from the last Sunday of OCT until the last Sunday of MAR
	KUSSA DCT SARPI...	Only available for arrivals to LTFO
	KUSSA H5...	Only available for arrivals to local airports
	KUSSA [STAR]	STAR from KUSSA to UGSB

VIZRO *	VIZRO DCT LAPTO...	FRA (I) points may also be used between VIZRO and LAPTO
	VIZRO DCT LURIS...	FRA (I) points may also be used between VIZRO and LURIS
	VIZRO DCT KUFAN...	FRA (I) points may also be used between VIZRO and KUFAN
	VIZRO DCT DISKA...	-
	VIZRO DCT TAVRO...	-
	VIZRO DCT OGEVI...	-
	VIZRO DCT GIMUR...	-
VIZRO H5...	-	
Direct DEP Point	Available Routings	Remarks
KTS	KTS...	Only available for arrivals to UGKO
* G, M and X types of flight are not restricted by the routing options described in the table.		

2 Procedures for VFR flights within Kutaisi TMA

Two-way radio communication shall be maintained with Kutaisi Approach on the FRQ 127.100 MHZ.

Transfer of VFR flights between Kutaisi APP and Kutaisi TWR is conducted over established entry/exit points of CTR as shown in the Visual Approach Chart AD2.UGKO-VAC unless otherwise instructed by APP or TWR unit.

3 Procedures for VFR flights within Kutaisi CTR

Aircraft shall establish two-way radio communication with Kutaisi tower before conducting flights in Kutaisi CTR.

VFR flights intending to enter Kutaisi CTR from uncontrolled airspace shall establish communication with Kutaisi tower at least 5 minutes before entry to obtain clearance.

VFR flights within Kutaisi CTR shall be conducted at or below 1500 FT AMSL unless otherwise cleared by the TWR unit.

VFR flights shall be conducted with visual reference to the ground.

VFR flights shall enter/exit Kutaisi CTR via the entry/exit points shown on the Visual Approach Chart AD 2.UGKO-VAC, unless otherwise instructed by APP or TWR unit.

To facilitate separation of VFR and IFR flights within the CTR, TWR controller may instruct a VFR flight to follow the following routes (taking into account the planned entry/exit point of a VFR flight):

For arriving VFR flights:

- UMZEL – NORGO, followed by holding at NORGO if required;
- OQIZO – NORGO, followed by holding at NORGO if required;
- GOLTI – AMPIZ – SOKKA, followed by holding at SOKKA if required;
- KRESA – ZAZNO – SOKKA, followed by holding at SOKKA if required.

For departing VFR flights:

- After departure to ZAZNO then KRESA;
 - After departure to AMPIZ then GOLTI.
- Note: No intermediate points will be required when leaving CTR via UMZEL or OQIZO or ZINDE.*

For VFR flights crossing CTR:

- GOLTI – KRESA, or
- KRESA – GOLTI.

All VFR reporting points of Kutaisi CTR are described in the following table:

Name	Geographical coordinates	DVOR/DME Fix (KTS)	Visual reference
UMZEL	421449N 0422206E	R302.5/D6.7	North of Chagani village
OQIZO	421615N 0423335E	R023.3/D6.6	North of Maghlaki village
GOLTI	420916N 0424213E	R090.4/D9.8	West of Vartsikhe reservoir dam
ZINDE	420541N 0423004	R164.4/D4.9	North-West from Vani town stadium
KRESA	420618N 0421700E	R237.8/D9.9	West of Sajavakho village
ZAZNO	420727N 0422644E	R202.6/D3.5	East of Chkvishi village

Name	Geographical coordinates	DVOR/DME Fix (KTS)	Visual reference
AMPIZ	420808N 0423231E	R126.3/D3.5	West of Sakulia village
NORGO	421235N 0422831E	R341.2/D2.1	2NM north of UGKO ARP
SOKKA	420838N 0422924E	R165.9/D1.9	2NM south of UGKO ARP

See also the Visual Approach Chart AD 2.UGKO-VAC.

UGKO AD 2.23 Additional information

Intense activity of swallow flocks takes place daily from 08:00 to 11:00 (local time) (during summer season from June to September) when birds fly from resting area (Airport Buildings) across the approach of RWY 07 to their feeding area, Aerodrome. Only small swallows are active, which doesn't effect flight safety if strikes to aircraft. Their flight height varies from 100 FT (30 M) to 165 FT (50 M) AGL. From 16:00 to 19:00 (local time) the same activity as described above takes place in reverse when the birds return to their resting area.

During the above periods pilots of aircraft are advised, where the design limitations of aircraft installations permit, to operate landing lights in flight, during take-off, approach-to-land and climb and descent procedures. Dispersal activities include occasional playing back of distressed calls from high fidelity weather-resistant speakers, high shooting sound produced of liquid gas cannons and the visual repellents (hunter dummies) allocated near the RWY 07/25.

Also modifications of the airport environment are under way to reduce, if not eliminate, the wildlife hazard. No landfills in the vicinity and no open waste-bins on the aerodrome. Ground and grass cover is treated properly.

UGKO AD 2.24 Charts related to an aerodrome

Aerodrome Chart – ICAO	AD 2.UGKO-ADC
Area Chart – ICAO	AD 2.UGKO-ARC
Standard Departure Chart – Instrument – ICAO RWY 07	AD 2.UGKO-SID-07-1
Standard Departure Routes – Instrument RWY 07	AD 2.UGKO-SID-07-3
Standard Departure Chart – Instrument – ICAO - RNAV RWY 07	AD 2.UGKO-SID-RNAV-07-1
Standard Departure Routes – Instrument – RNAV RWY 07	AD 2.UGKO-SID-RNAV-07-3
Standard Departure Chart – Instrument – ICAO - RNAV RWY 25	AD 2.UGKO-SID-RNAV-25-1
Standard Departure Routes – Instrument – RNAV RWY 25	AD 2.UGKO-SID-RNAV-25-3
Standard Arrival Chart – Instrument – ICAO - RNAV RWY 07	AD 2.UGKO-STAR-RNAV-07-1
Standard Arrival Routes – Instrument – RNAV RWY 07	AD 2.UGKO-STAR-RNAV-07-3
Standard Arrival Chart – Instrument – ICAO - RNAV RWY 25	AD 2.UGKO-STAR-RNAV-25-1
Standard Arrival Routes – Instrument – RNAV RWY 25	AD 2.UGKO-STAR-RNAV-25-3
ATC Surveillance Minimum Altitude Chart – ICAO	AD 2.UGKO-ATCSMAC-1
ATC Surveillance Minimum Altitude Sectors' Coordinates	AD 2.UGKO-ATCSMAC-3
Instrument Approach Chart – ICAO RWY 07 (ILS y)	AD 2.UGKO-IAC-07-ILSy
Instrument Approach Chart – ICAO RWY 07 (ILS z)	AD 2.UGKO-IAC-07-ILSz-1
Instrument Approach Coding – RWY 07 (ILS z)	AD 2.UGKO-IAC-07-ILSz-3
Instrument Approach Chart – ICAO RWY 07 (LOC y)	AD 2.UGKO-IAC-07-LOCy

Instrument Approach Chart – ICAO RWY 07 (LOC z)	AD 2.UGKO-IAC-07-LOCz-1
Instrument Approach Coding – RWY 07 (LOC z)	AD 2.UGKO-IAC-07-LOCz-3
Instrument Approach Chart – ICAO RWY 25 (ILS y)	AD 2.UGKO-IAC-25-ILSy
Instrument Approach Chart – ICAO RWY 25 (ILS z)	AD 2.UGKO-IAC-25-ILSz-1
Instrument Approach Coding – RWY 25 (ILS z)	AD 2.UGKO-IAC-25-ILSz-3
Instrument Approach Chart – ICAO RWY 25 (LOC y)	AD 2.UGKO-IAC-25-LOCy
Instrument Approach Chart – ICAO RWY 25 (LOC z)	AD 2.UGKO-IAC-25-LOCz-1
Instrument Approach Coding – RWY 25 (LOC z)	AD 2.UGKO-IAC-25-LOCz-3
Instrument Approach Chart – ICAO RWY 07 (VOR)	AD 2.UGKO-IAC-07-VOR
Instrument Approach Chart – ICAO RWY 25 (VOR)	AD 2.UGKO-IAC-25-VOR
Visual Approach Chart – ICAO	AD 2.UGKO-VAC
Bird Concentrations and Movement	AD 2.UGKO-BIRD

UGKO AD 2.25 Visual segment surface (VSS) penetration

To be developed.

PAGE INTENTIONALLY LEFT BLANK

AERODROME CHART - ICAO

42° 10' 37" N
042° 28' 58" E


ELEV 160'

TWR 125.500

KUTAISI/Kopitnari (UGKO)


RWY	DIRECTION	THR	BEARING STRENGTH
07	073°	42°10'30"N 042°28'04"E	PCN 55/F/C/X/T
25	253°	42°10'43"N 042°29'51"E	
APRON			PCN 65/F/C/X/T

CAUTION
HS 1: Airport Vehicles and RFFS trucks on close vicinity

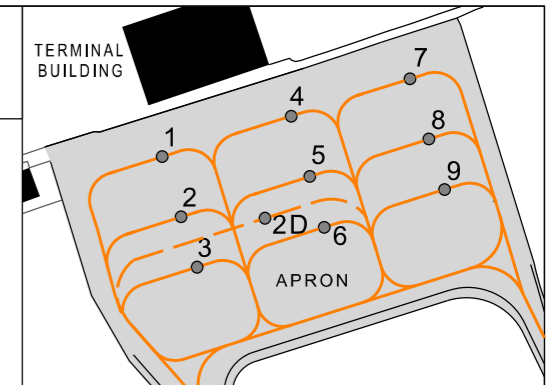


ELEVATIONS ARE IN FEET, DISTANCES ARE IN METRES
AND BEARINGS ARE MAGNETIC


VAR 7° E. 2021

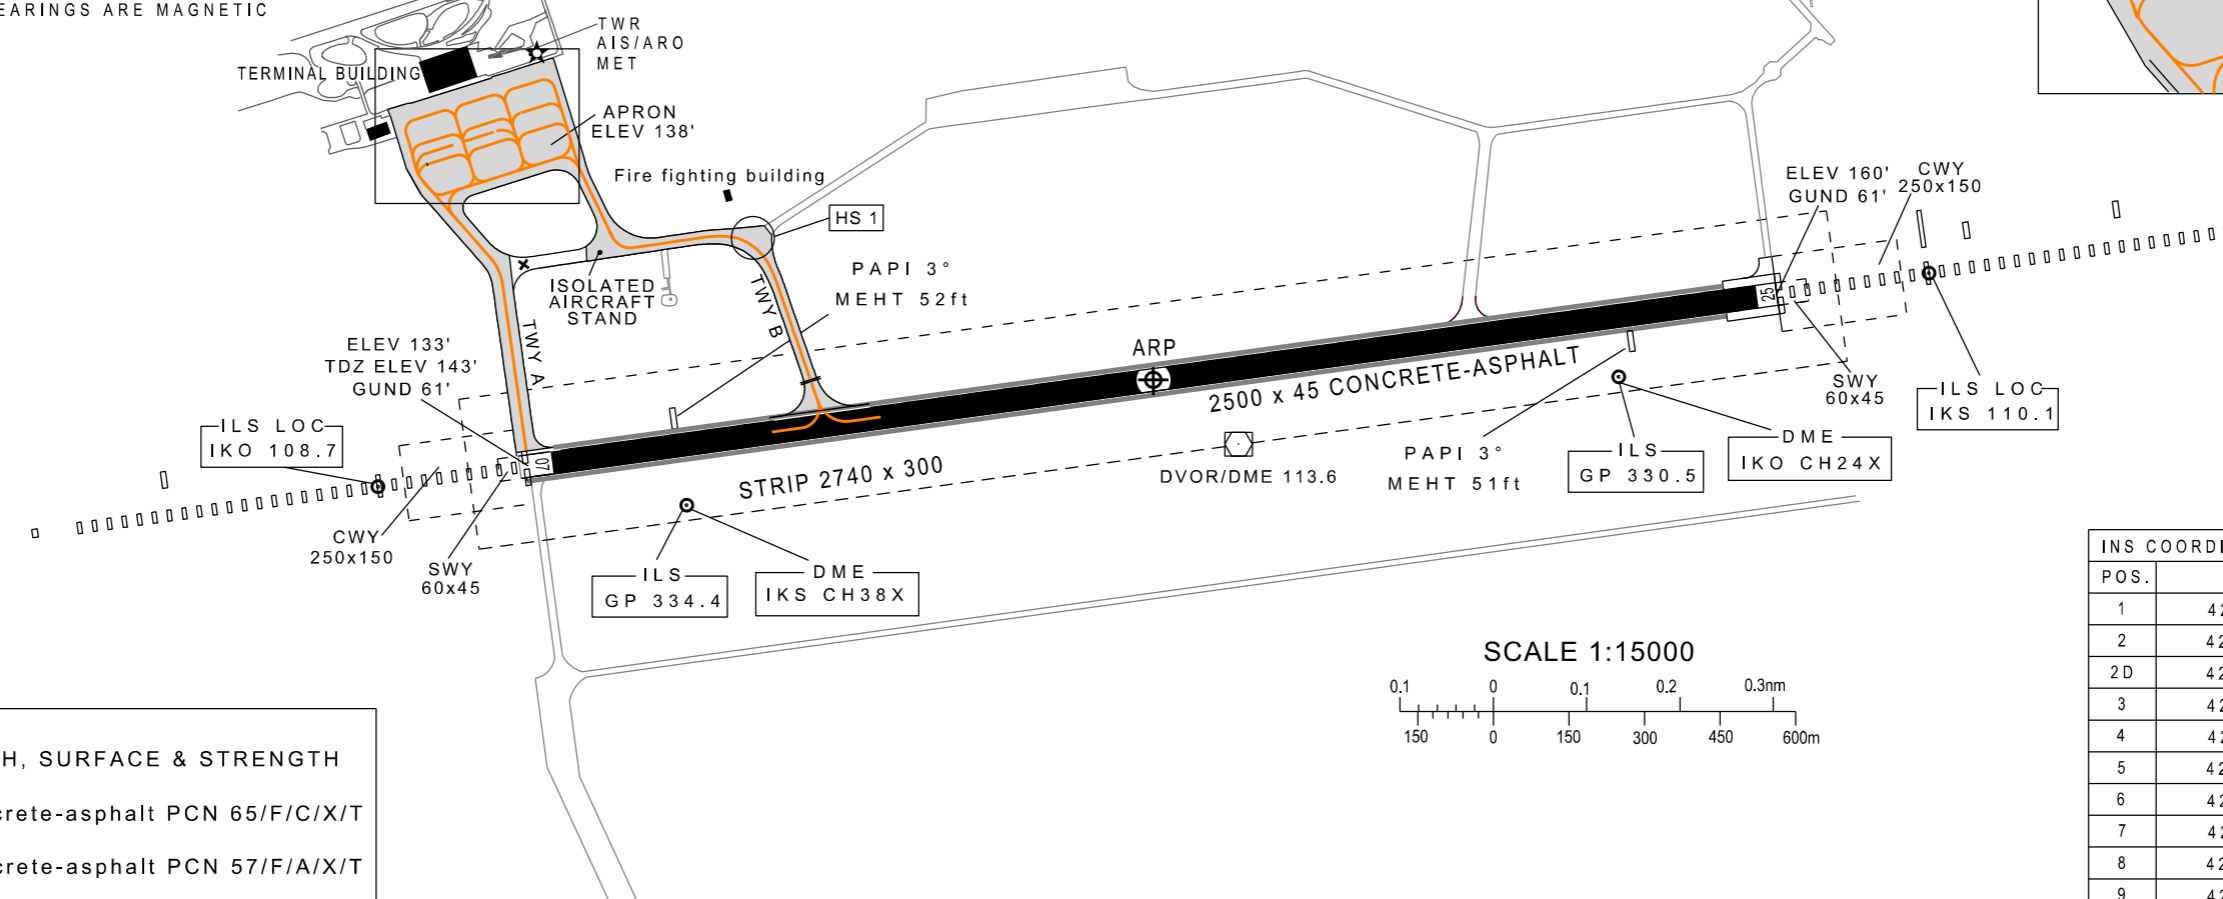

POS.	COORDINATES
1	42°10'52.23"N 042°27'54.89"E
2	42°10'50.70"N 042°27'55.60"E
2D	42°10'50.70"N 042°27'58.33"E
3	42°10'49.42"N 042°27'56.20"E
4	42°10'53.34"N 042°27'59.18"E
5	42°10'51.82"N 042°27'59.93"E
6	42°10'50.53"N 042°28'00.49"E
7	42°10'54.44"N 042°28'03.42"E
8	42°10'52.89"N 042°28'04.09"E
9	42°10'51.61"N 042°28'04.68"E



TAXIWAYS WIDTH, SURFACE & STRENGTH
 TWY A: 23 M Concrete-asphalt PCN 65/F/C/X/T
 TWY B: 18 M Concrete-asphalt PCN 57/F/A/X/T

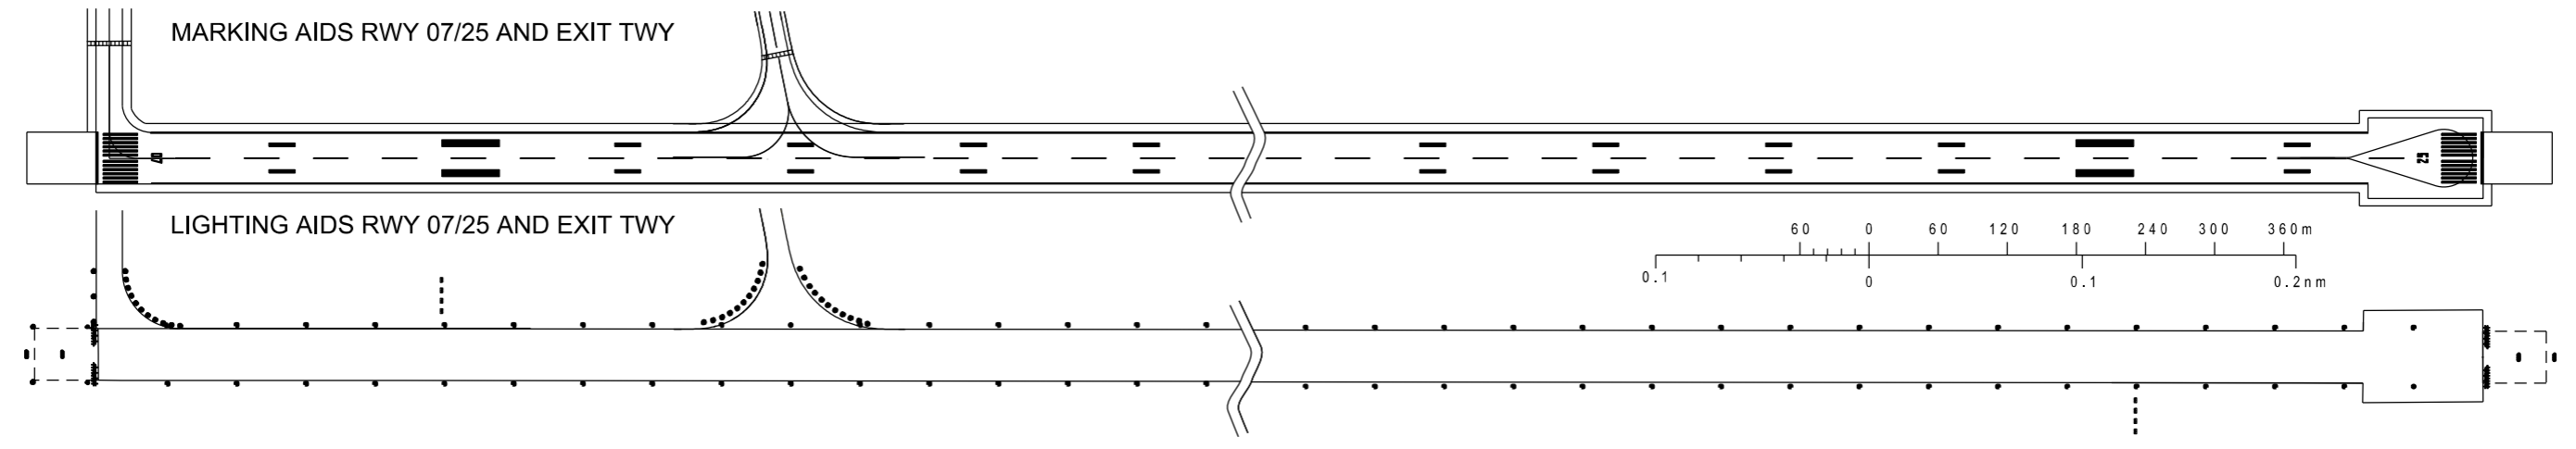


Changes: RWY PCN and lighting, PAPI MEHT updated

PAGE INTENTIONALLY LEFT BLANK

AREA CHART - ICAO

KUTAISI APP 127.100
TWR 125.500

KUTAISI/Kopitnari (UGKO)

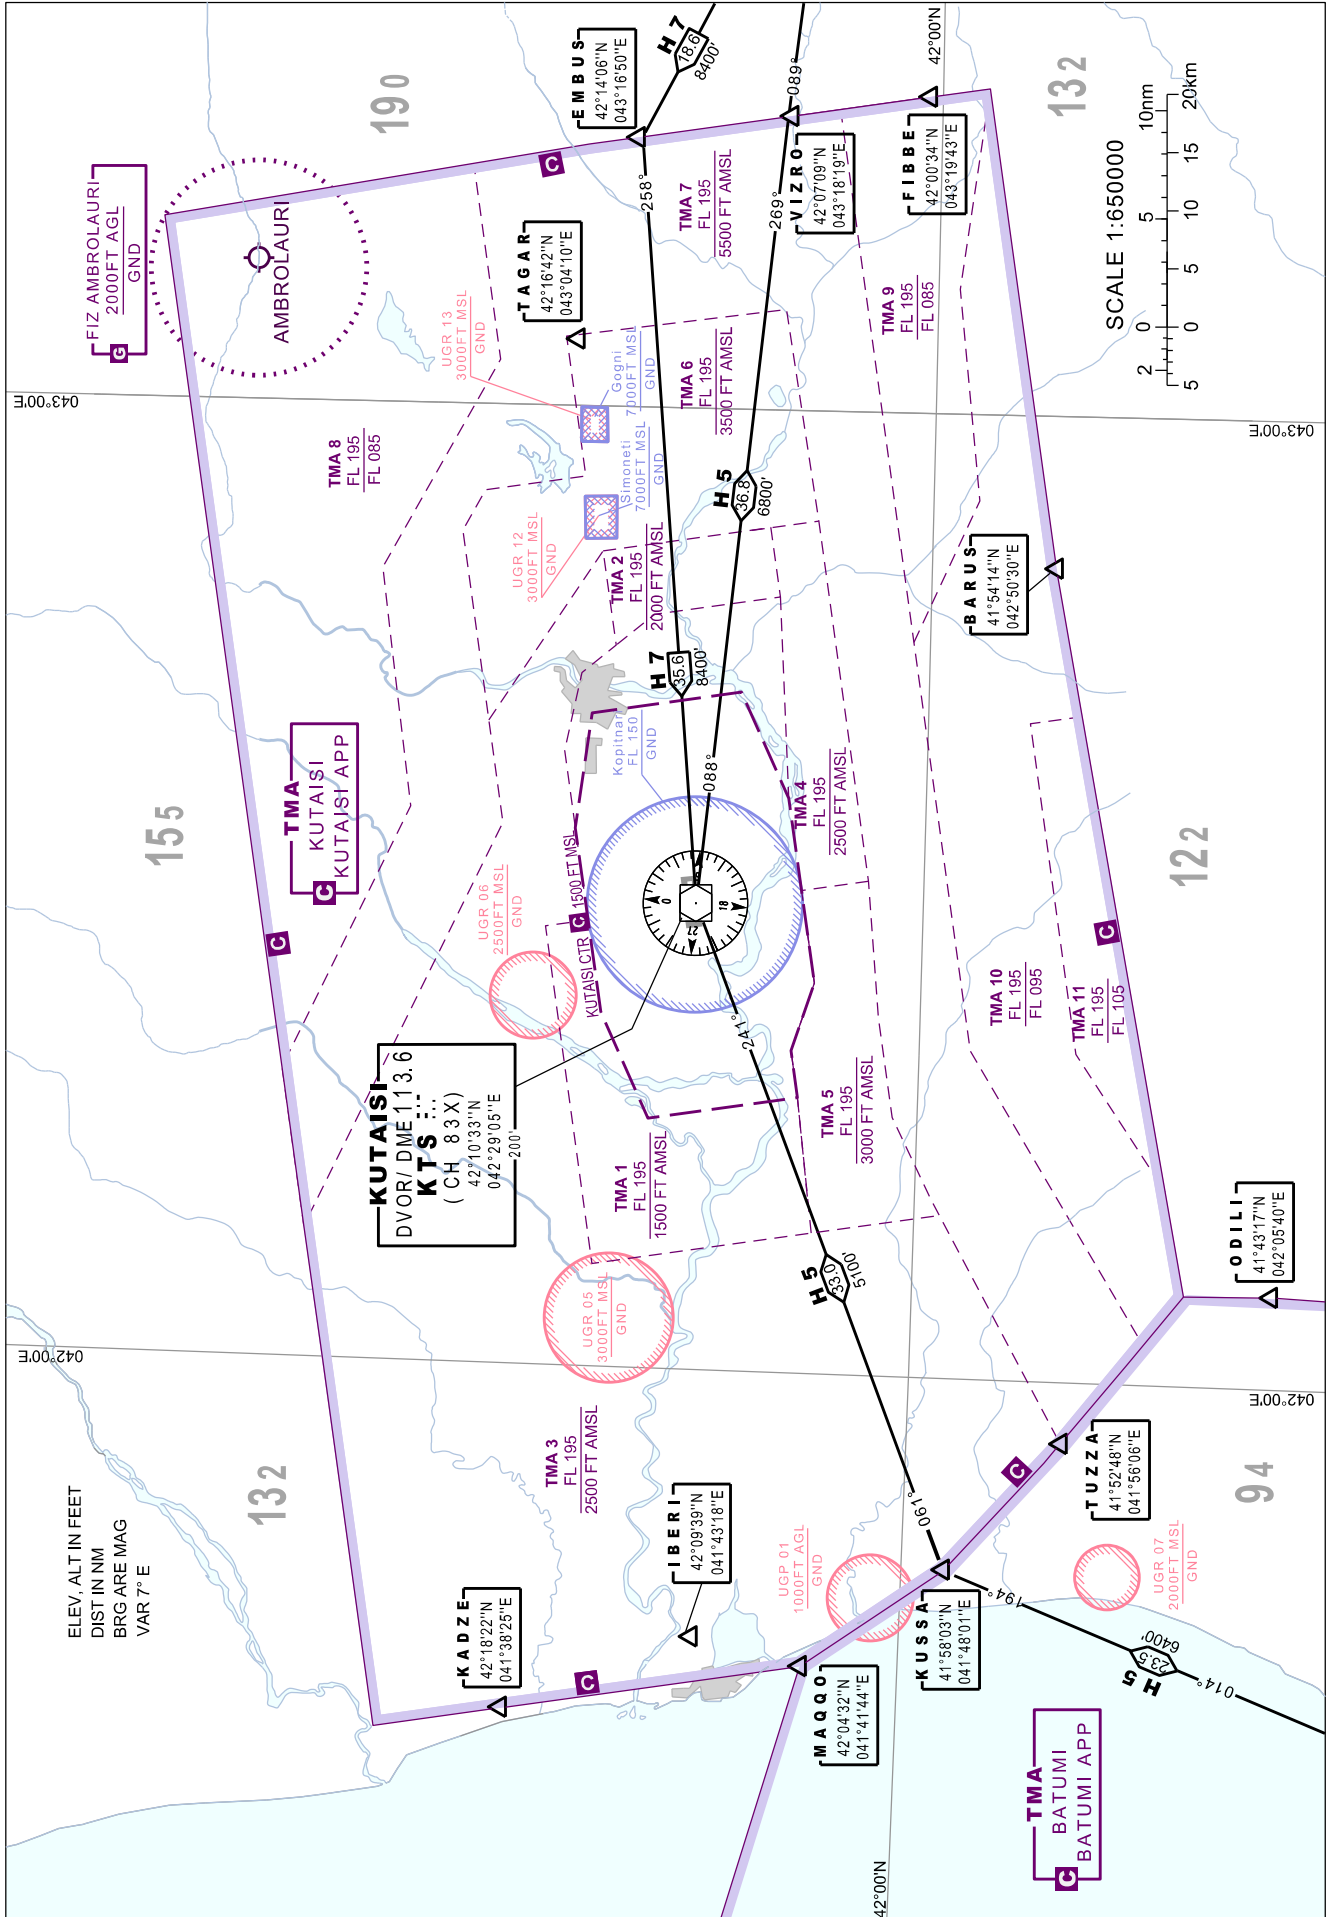

Changes: AMA added

PAGE INTENTIONALLY LEFT BLANK


**STANDARD DEPARTURE CHART-
INSTRUMENT (SID) - ICAO**

**KUTAISI/Kopitnari (UGKO)
RWY 07**
KADZE 1G VIZRO 1G
KUSSA 1G

TRANSITION ALTITUDE
7000'


APP 127.100
TWR 125.500

Changes: Added elevation of DME antenna

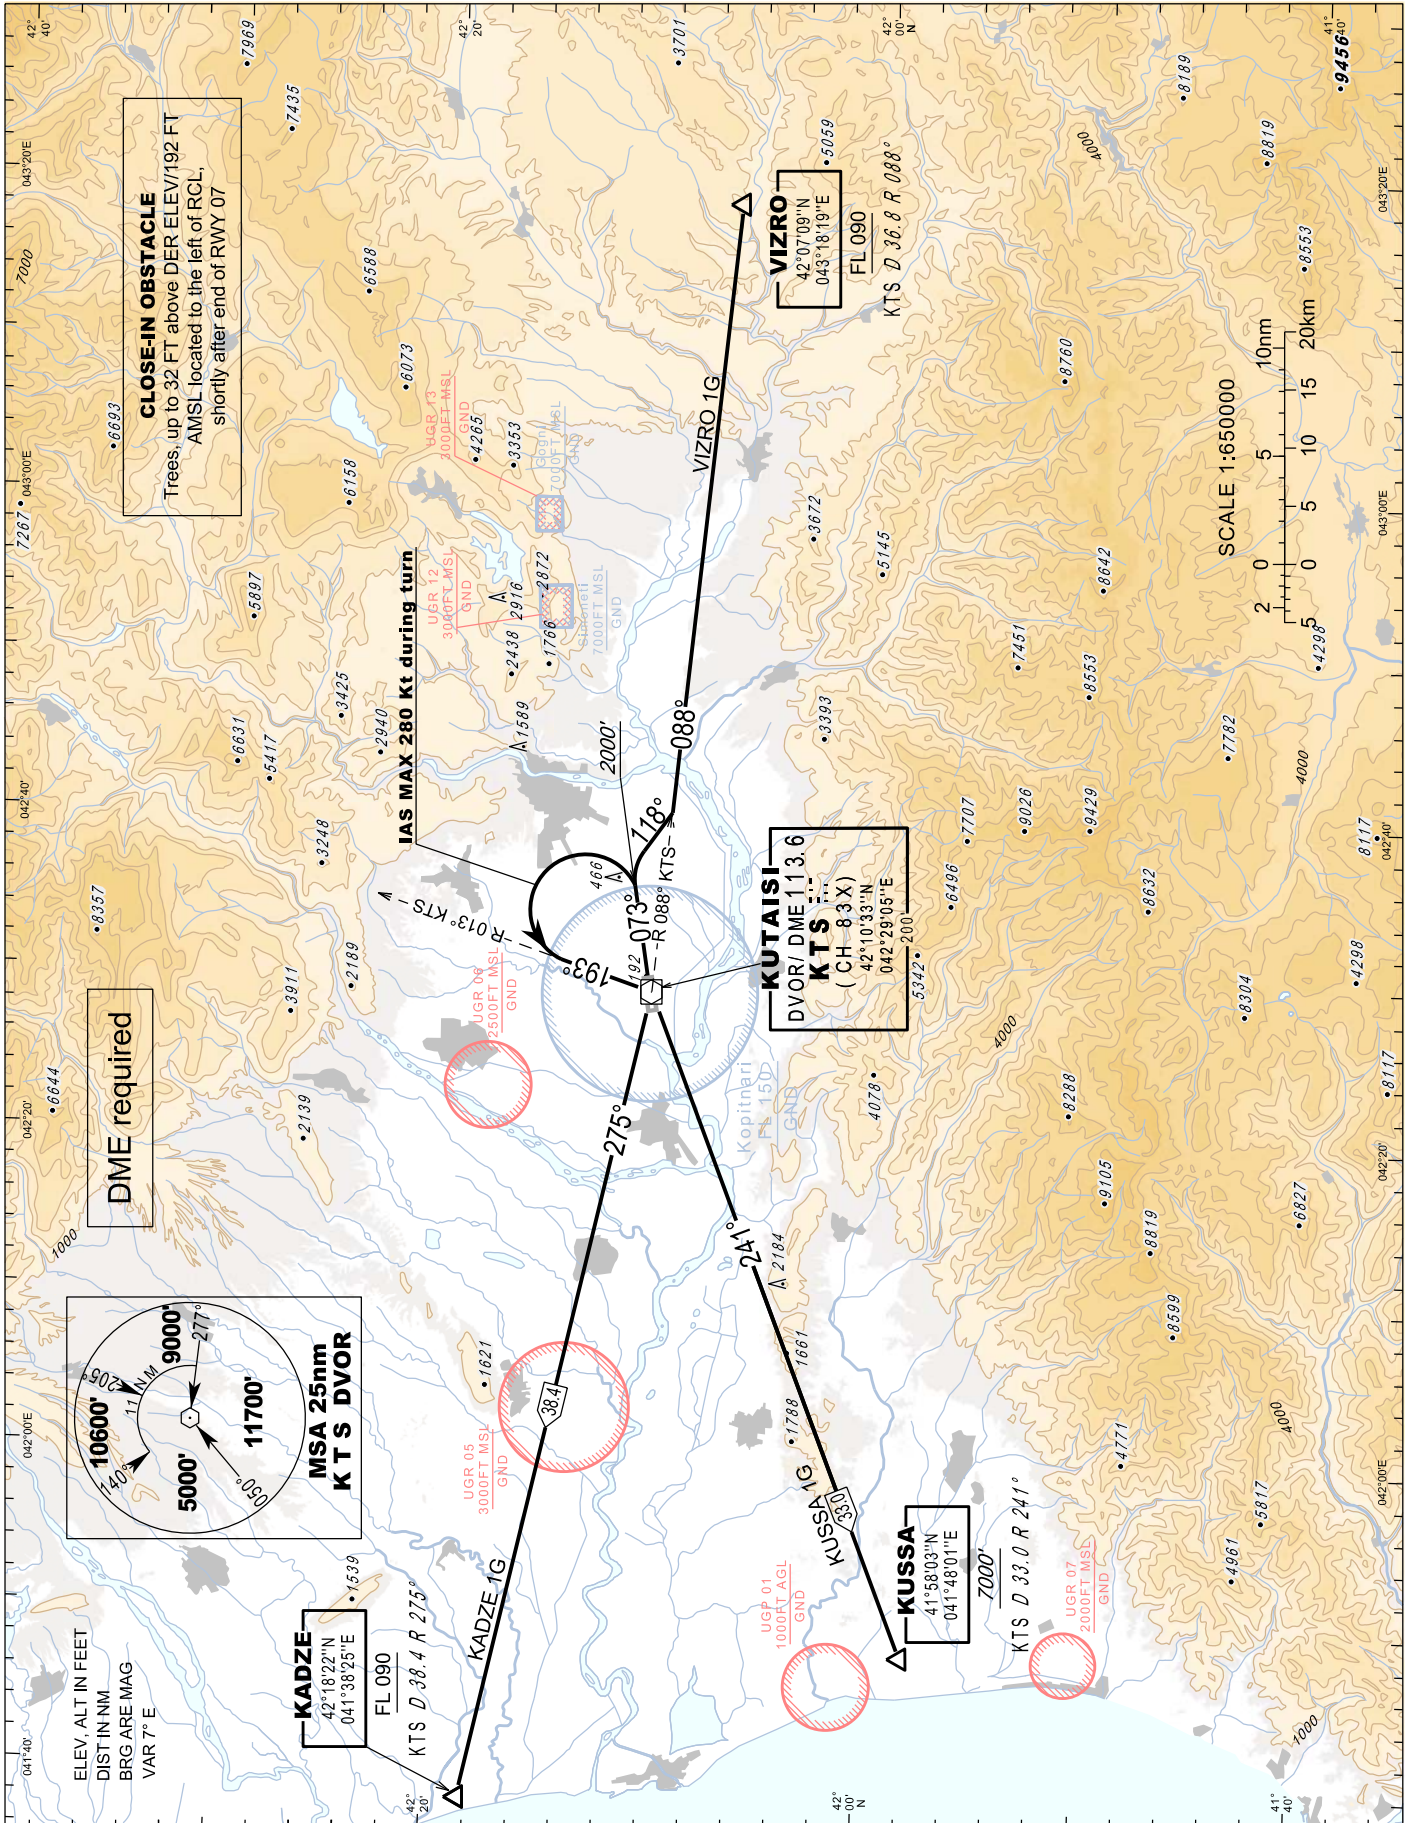

CLOSE-IN OBSTACLE
Trees, up to 32 FT above DER ELEV/192 FT
AMSL, located to the left of RCL,
shortly after end of RWY 07

DME required



KADZE
42°18'22"N
041°38'25"E
FL 090
KTS D 38.4 R 275°

KUTAISI
DVOR DME 11 3.6
K T S
(CH - 83 X)
42°10'33"N
042°29'05"E
5342 · 200

VIZRO
42°07'09"N
043°18'19"E
FL 090
KTS D 36.8 R 088°

KUSSA
41°58'03"N
041°48'01"E
7000'
KTS D 33.0 R 241°



PAGE INTENTIONALLY LEFT BLANK

STANDARD DEPARTURE ROUTES - INSTRUMENT - RWY 07

SID	ROUTING AND ALTITUDES	MIN.CLIMB GRAD.
<p>KADZE 1G</p>	<p>KADZE ONE GOLF Climb runway heading to FL090 or above. At 2000 FT turn LEFT to intercept and follow R-013° KTS inbound KTS. Then proceed to KADZE, R-275° KTS. Do not turn before the DER. IAS Max during the first turn 280Kt.</p>	<p>3.7% to 4500 FT</p>
<p>KUSSA 1G</p>	<p>KUSSA ONE GOLF Climb runway heading to 7000 FT or above. At 2000 FT turn LEFT to intercept and follow R-013° KTS inbound KTS. Then proceed to KUSSA, R-241° KTS. Do not turn before the DER. IAS Max during the first turn 280Kt.</p>	<p>3.7% to 4500 FT</p>
<p>VIZRO 1G</p>	<p>VIZRO ONE GOLF Climb runway heading to FL090 or above. At 2000 FT turn RIGHT heading 118° to intercept and follow R-088° KTS inbound VIZRO. Do not turn before the DER.</p>	<p>4.0% to FL 090</p>

PAGE INTENTIONALLY LEFT BLANK


**STANDARD DEPARTURE CHART-
INSTRUMENT (SID) - ICAO**

TRANSITION ALTITUDE
7000'

APP 127.100
TWR 125.500

**KUTAISI/Kopitnari (UGKO)
RNAV RWY 07**
KADZE 1D KADZE 1F
KUSSA 1D VIZRO 1D

Changes: Added elevation of DME antenna

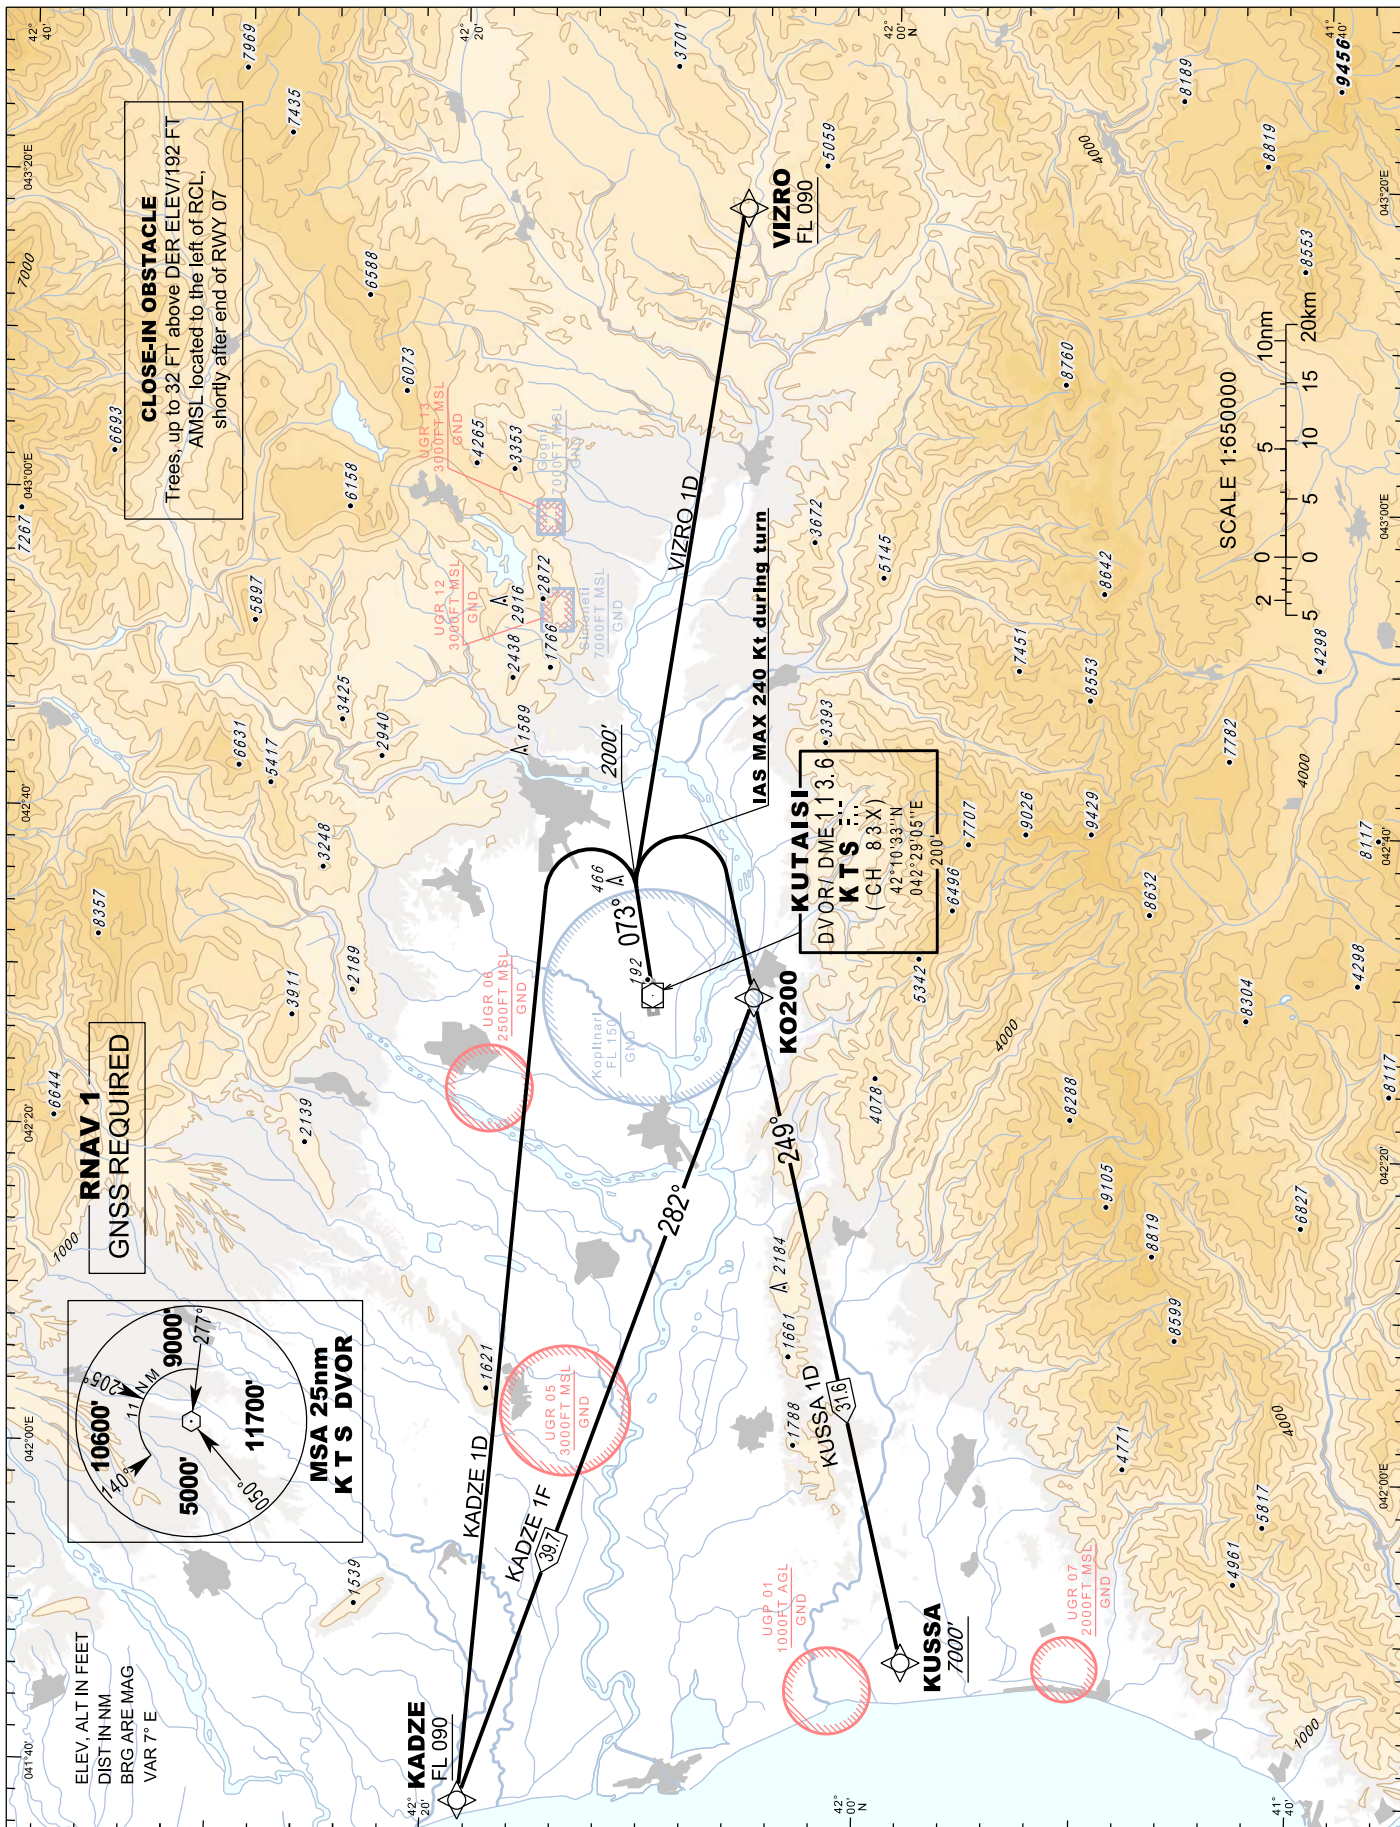

PAGE INTENTIONALLY LEFT BLANK

STANDARD DEPARTURE ROUTES - RNAV (GNSS) INSTRUMENT - RWY07

SID	ROUTING AND ALTITUDES	MIN.CLIMB GRAD.	Comment
KADZE 1D	<p>KADZE ONE DELTA Climb on course 073°, when passing 2000 FT turn LEFT direct to KADZE. Cross KADZE at or above FL 090. Do not turn before the DER.</p>	3.7% to 4500 FT	NIL

RNAV 1 SID Coding Table of KADZE 1D

Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification
	Identifier	Flyover	Coordinates				Level	Speed kt	
CA	-	-	-	073° (080.4°)	-	-	A2000	-	RNAV1
DF	KADZE	-	42°18'22.0"N 041°38'25.0"E	-	-	L	+FL090	-	RNAV1

SID	ROUTING AND ALTITUDES	MIN.CLIMB GRAD.	Comment
KADZE 1F	<p>KADZE ONE FOXTROT Climb on course 073°, when passing 2000 FT turn RIGHT direct to KO200, track to KADZE. Cross KADZE at or above FL 090. Do not turn before the DER.</p>	4.0% to 5000 FT	Ignore speed restriction of KO200 after turn is completed inbound KO200

RNAV 1 SID Coding Table of KADZE 1F

Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification
	Identifier	Flyover	Coordinates				Level	Speed kt	
CA	-	-	-	073° (080.4°)	-	-	A2000	-	RNAV1
DF	KO200	-	42°05'52.0"N 042°29'07.0"E	-	-	R	-	-240	RNAV1
TF	KADZE	-	42°18'22.0"N 041°38'25.0"E	282° (288.6°)	39.7	-	+FL090	-	RNAV1

SID	ROUTING AND ALTITUDES	MIN.CLIMB GRAD.	Comment
VIZRO 1D	<p>VIZRO ONE DELTA Climb on course 073°, when passing 2000 FT turn RIGHT direct to VIZRO. Cross VIZRO at or above FL 090. Do not turn before the DER.</p>	4.0% to FL 090	NIL

RNAV 1 SID Coding Table of VIZRO 1D

Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification
	Identifier	Flyover	Coordinates				Level	Speed kt	
CA	-	-	-	073° (080.4°)	-	-	A2000	-	RNAV1
DF	VIZRO	-	42°07'09.0"N 043°18'19.0"E	-	-	R	+FL090	-	RNAV1

SID	ROUTING AND ALTITUDES	MIN.CLIMB GRAD.	Comment
KUSSA 1D	<p>KUSSA ONE DELTA Climb on course 073°, when passing 2000 FT turn RIGHT direct to KO200, track to KUSSA. Cross KUSSA at or above 7000 FT. Do not turn before the DER.</p>	4.0% to 5000 FT	Ignore speed restriction of KO200 after turn is completed inbound KO200

RNAV 1 SID Coding Table of KUSSA 1D

Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification
	Identifier	Flyover	Coordinates				Level	Speed kt	
CA	-	-	-	073° (080.4°)	-	-	A2000	-	RNAV1
DF	KO200	-	42°05'52.0"N 042°29'07.0"E	-	-	R	-	-240	RNAV1
TF	KUSSA	-	41°58'03.0"N 041°48'01.0"E	249° (255.9°)	31.6	-	+A7000	-	RNAV1


PAGE INTENTIONALLY LEFT BLANK

**STANDARD DEPARTURE CHART-
INSTRUMENT (SID) - ICAO**

TRANSITION ALTITUDE
7000'


APP 127.100
TWR 125.500

**KUTAISI/Kopitnari (UGKO)
RNAV RWY 25**
KADZE 1E VIZRO 1E
KUSSA 1E

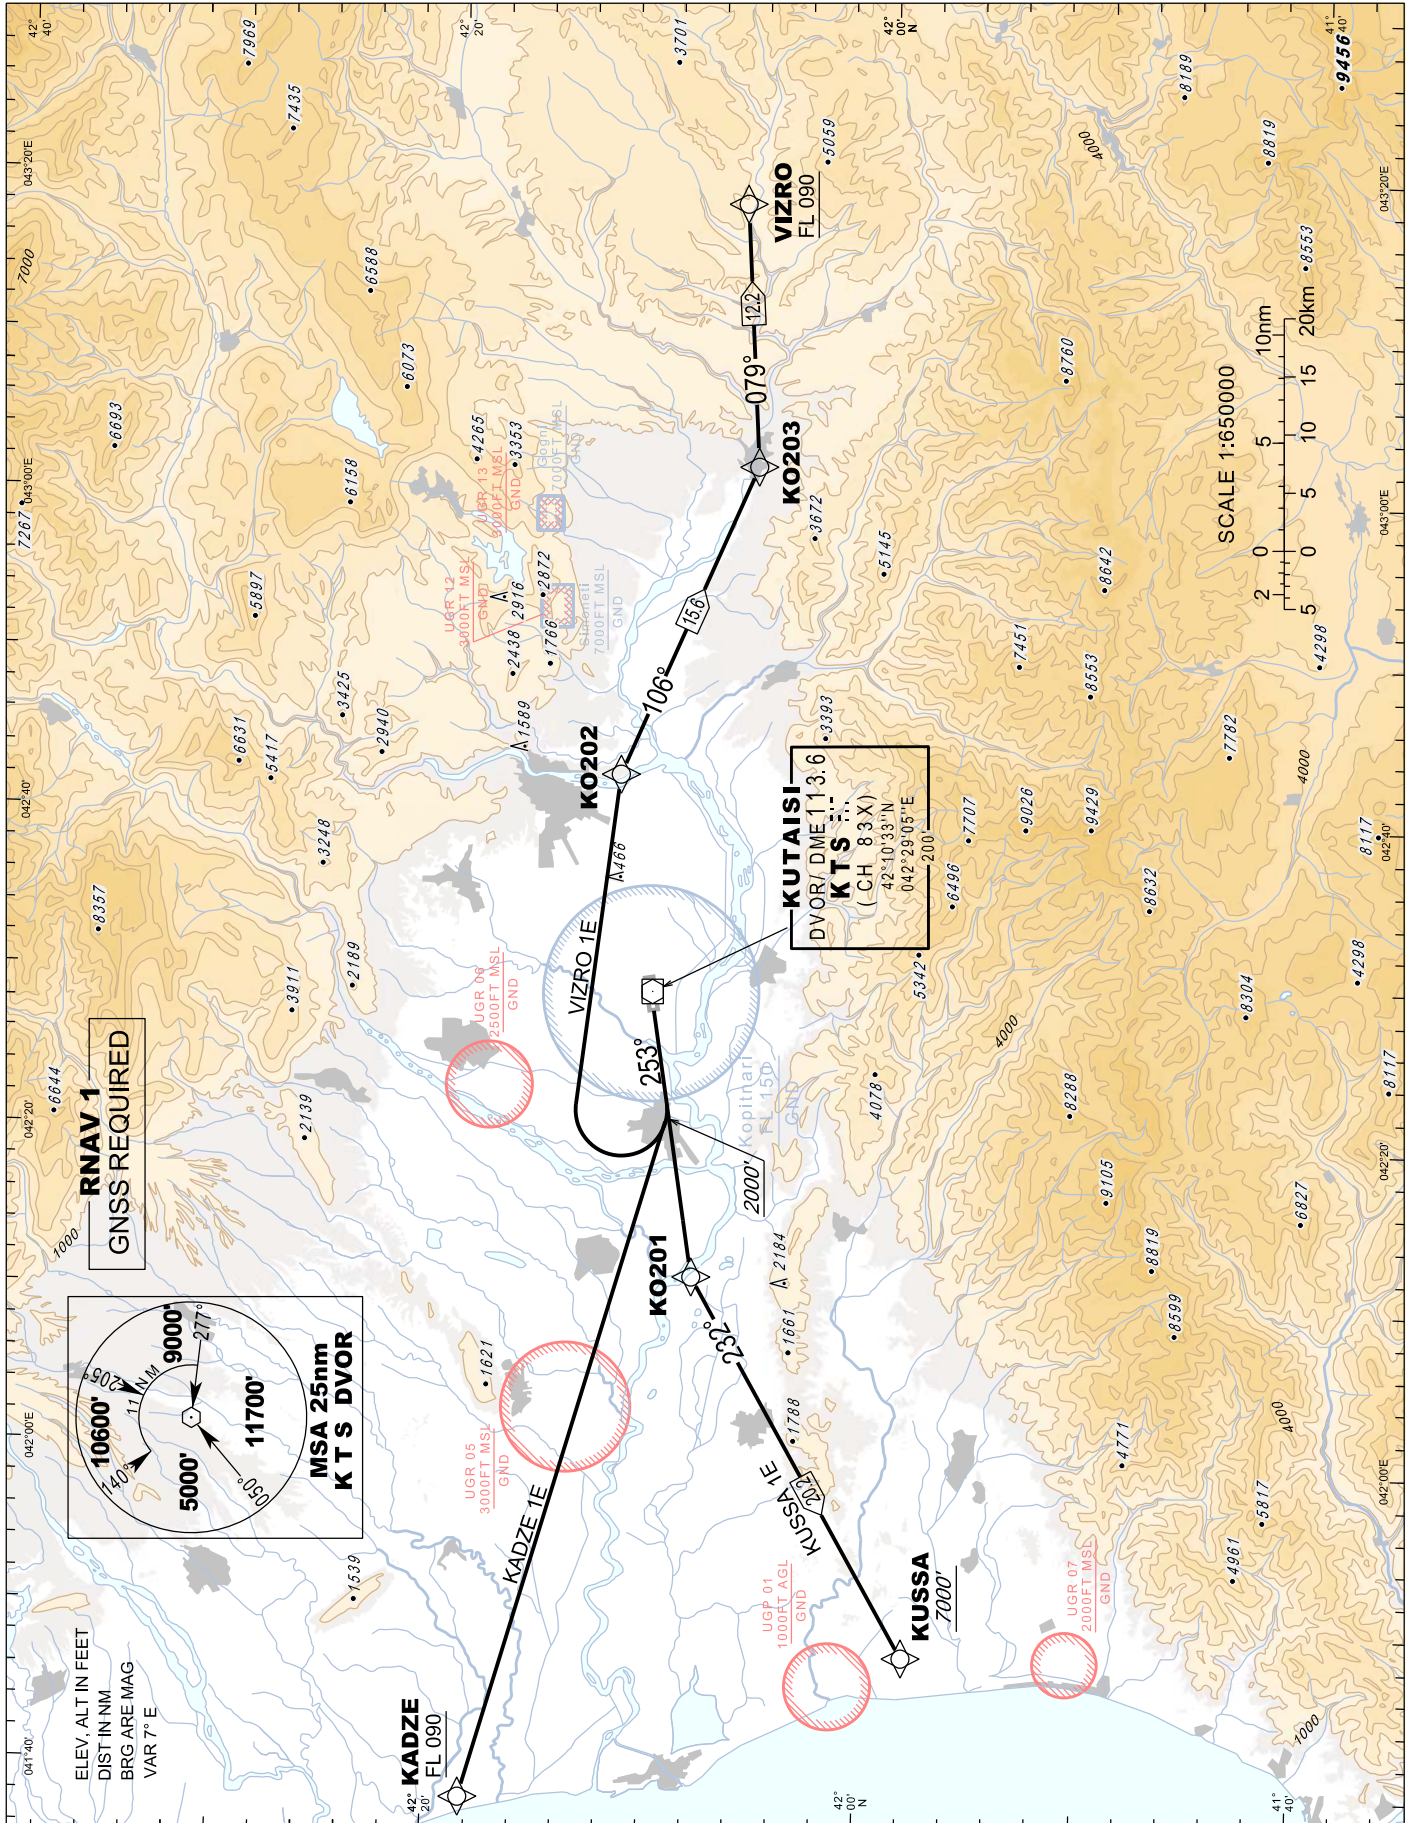

Changes: Added elevation of DME antenna

**RNAV 1
GNSS REQUIRED**



ELEV, ALT IN FEET
DIST IN NM
BRG ARE MAG
VAR 7° E



PAGE INTENTIONALLY LEFT BLANK

STANDARD DEPARTURE ROUTES - RNAV (GNSS) INSTRUMENT - RWY25

SID	ROUTING AND ALTITUDES	MIN.CLIMB GRAD.	Comment						
KADZE 1E	KADZE ONE ECHO Climb on course 253°, when passing 2000 FT turn RIGHT direct to KADZE. Cross KADZE at or above FL 090. Do not turn before the DER.	3.8% to FL 090	NIL						
RNAV 1 SID Coding Table of KADZE 1E									
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification
	Identifier	Flyover	Coordinates				Level	Speed kt	
CA	-	-	-	253° (260.4°)	-	-	A2000	-	RNAV1
DF	KADZE	-	42°18'22.0"N 041°38'25.0"E	-	-	R	+FL090	-	RNAV1

SID	ROUTING AND ALTITUDES	MIN.CLIMB GRAD.	Comment						
VIZRO 1E	VIZRO ONE ECHO Climb on course 253°, when passing 2000 FT turn RIGHT direct to KO202, track to KO203, track to VIZRO. Cross VIZRO at or above FL 090. Do not turn before the DER.	-	NIL						
RNAV 1 SID Coding Table of VIZRO 1E									
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification
	Identifier	Flyover	Coordinates				Level	Speed kt	
CA	-	-	-	253° (260.4°)	-	-	A2000	-	RNAV1
DF	KO202	-	42°12'18.0"N 042°42'36.0"E	-	-	R	-	-	RNAV1
TF	KO203	-	42°06'14.0"N 043°01'58.0"E	106° (112.8°)	15.6	-	-	-	RNAV1
TF	VIZRO	-	42°07'09.0"N 043°18'19.0"E	079° (086.4°)	12.2	-	+FL090	-	RNAV1

SID	ROUTING AND ALTITUDES	MIN.CLIMB GRAD.	Comment						
KUSSA 1E	KUSSA ONE ECHO To KO201 on course 253°, to KUSSA. Cross KUSSA at or above 7000 FT.	-	NIL						
RNAV 1 SID Coding Table of KUSSA 1E									
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification
	Identifier	Flyover	Coordinates				Level	Speed kt	
CF	KO201	-	42°08'23.0"N 042°11'21.0"E	253° (260.5°)	-	-	-	-	RNAV1
TF	KUSSA	-	41°58'03.0"N 041°48'01.0"E	232° (239.0°)	20.2	-	+A7000	-	RNAV1

PAGE INTENTIONALLY LEFT BLANK

PAGE INTENTIONALLY LEFT BLANK

STANDARD ARRIVAL ROUTES - RNAV (GNSS) INSTRUMENT - RWY 07

RNAV 1 STAR Coding Table of BASKA 1A									
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification
	Identifier	Flyover	Coordinates				Level	Speed kt	
IF	BASKA	-	42°34'59.0"N 043°26'55.0"E	-	-	-	+FL160	-	RNAV1
TF	KO100	-	42°23'54.0"N 042°56'14.0"E	237° (244.1°)	25.2	-	+FL110	-	RNAV1
TF	NEZAS	-	42°18'07.0"N 042°40'29.0"E	237° (243.7°)	13.0	-	+A7000	-	RNAV1
TF	LANNU	-	42°14'19.0"N 042°14'06.0"E	252° (259.1°)	19.9	-	+A3500	-230	RNAV1

RNAV 1 STAR Coding Table of EMBUS 1A									
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification
	Identifier	Flyover	Coordinates				Level	Speed kt	
IF	EMBUS	-	42°14'06.0"N 043°16'50.0"E	-	-	-	+FL090	-	RNAV1
TF	KO101	-	42°16'14.0"N 042°57'50.0"E	272° (278.7°)	14.3	-	+FL090	-	RNAV1
TF	NEZAS	-	42°18'07.0"N 042°40'29.0"E	271° (278.4°)	13.0	-	+A7000	-	RNAV1
TF	LANNU	-	42°14'19.0"N 042°14'06.0"E	252° (259.1°)	19.9	-	+A3500	-230	RNAV1

RNAV 1 STAR Coding Table of MAQQO 1A									
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification
	Identifier	Flyover	Coordinates				Level	Speed kt	
IF	MAQQO	-	42°04'32.0"N 041°41'44.0"E	-	-	-	+FL090	-	RNAV1
TF	OQLES	-	42°07'58.0"N 042°08'03.0"E	073° (079.9°)	19.9	-	+A3500	-230	RNAV1

RNAV 1 STAR Coding Table of TUZZA 1A									
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification
	Identifier	Flyover	Coordinates				Level	Speed kt	
IF	TUZZA	-	41°52'48.0"N 041°56'06.0"E	-	-	-	+A7000	-	RNAV1
TF	KO108	-	41°57'07.0"N 041°59'29.0"E	023° (030.2°)	5.0	-	+A5000	-	RNAV1
TF	OQLES	-	42°07'58.0"N 042°08'03.0"E	023° (030.3°)	12.6	-	+A3500	-230	RNAV1

RNAV Holding Coding Tables								
Fix Identifier	Inbound course °MAG(°True)	Time (min)	Turn Direction	Min alt.	Max alt.	Speed limit (kt)	Mag. VAR	Navigation Specification
MAQQO	087° (094.0°)	1.5*	L	FL090	FL300	280	-7°	RNAV1
OQLES	073° (080.0°)	1.0	L	A3500	FL140	250	-7°	RNAV1

* 1.0 min at or below FL140


PAGE INTENTIONALLY LEFT BLANK

**STANDARD ARRIVAL
CHART - INSTRUMENT
(STAR) - ICAO**


TRANSITION LEVEL FL 090
TRANSITION ALTITUDE 7000'

APP 127.100
TWR 125.500

**KUTAISI/Kopitnari (UGKO)
RNAV RWY 25
TUZZA 1B MAQQO 1B
BASKA 1B EMBUS 1B**

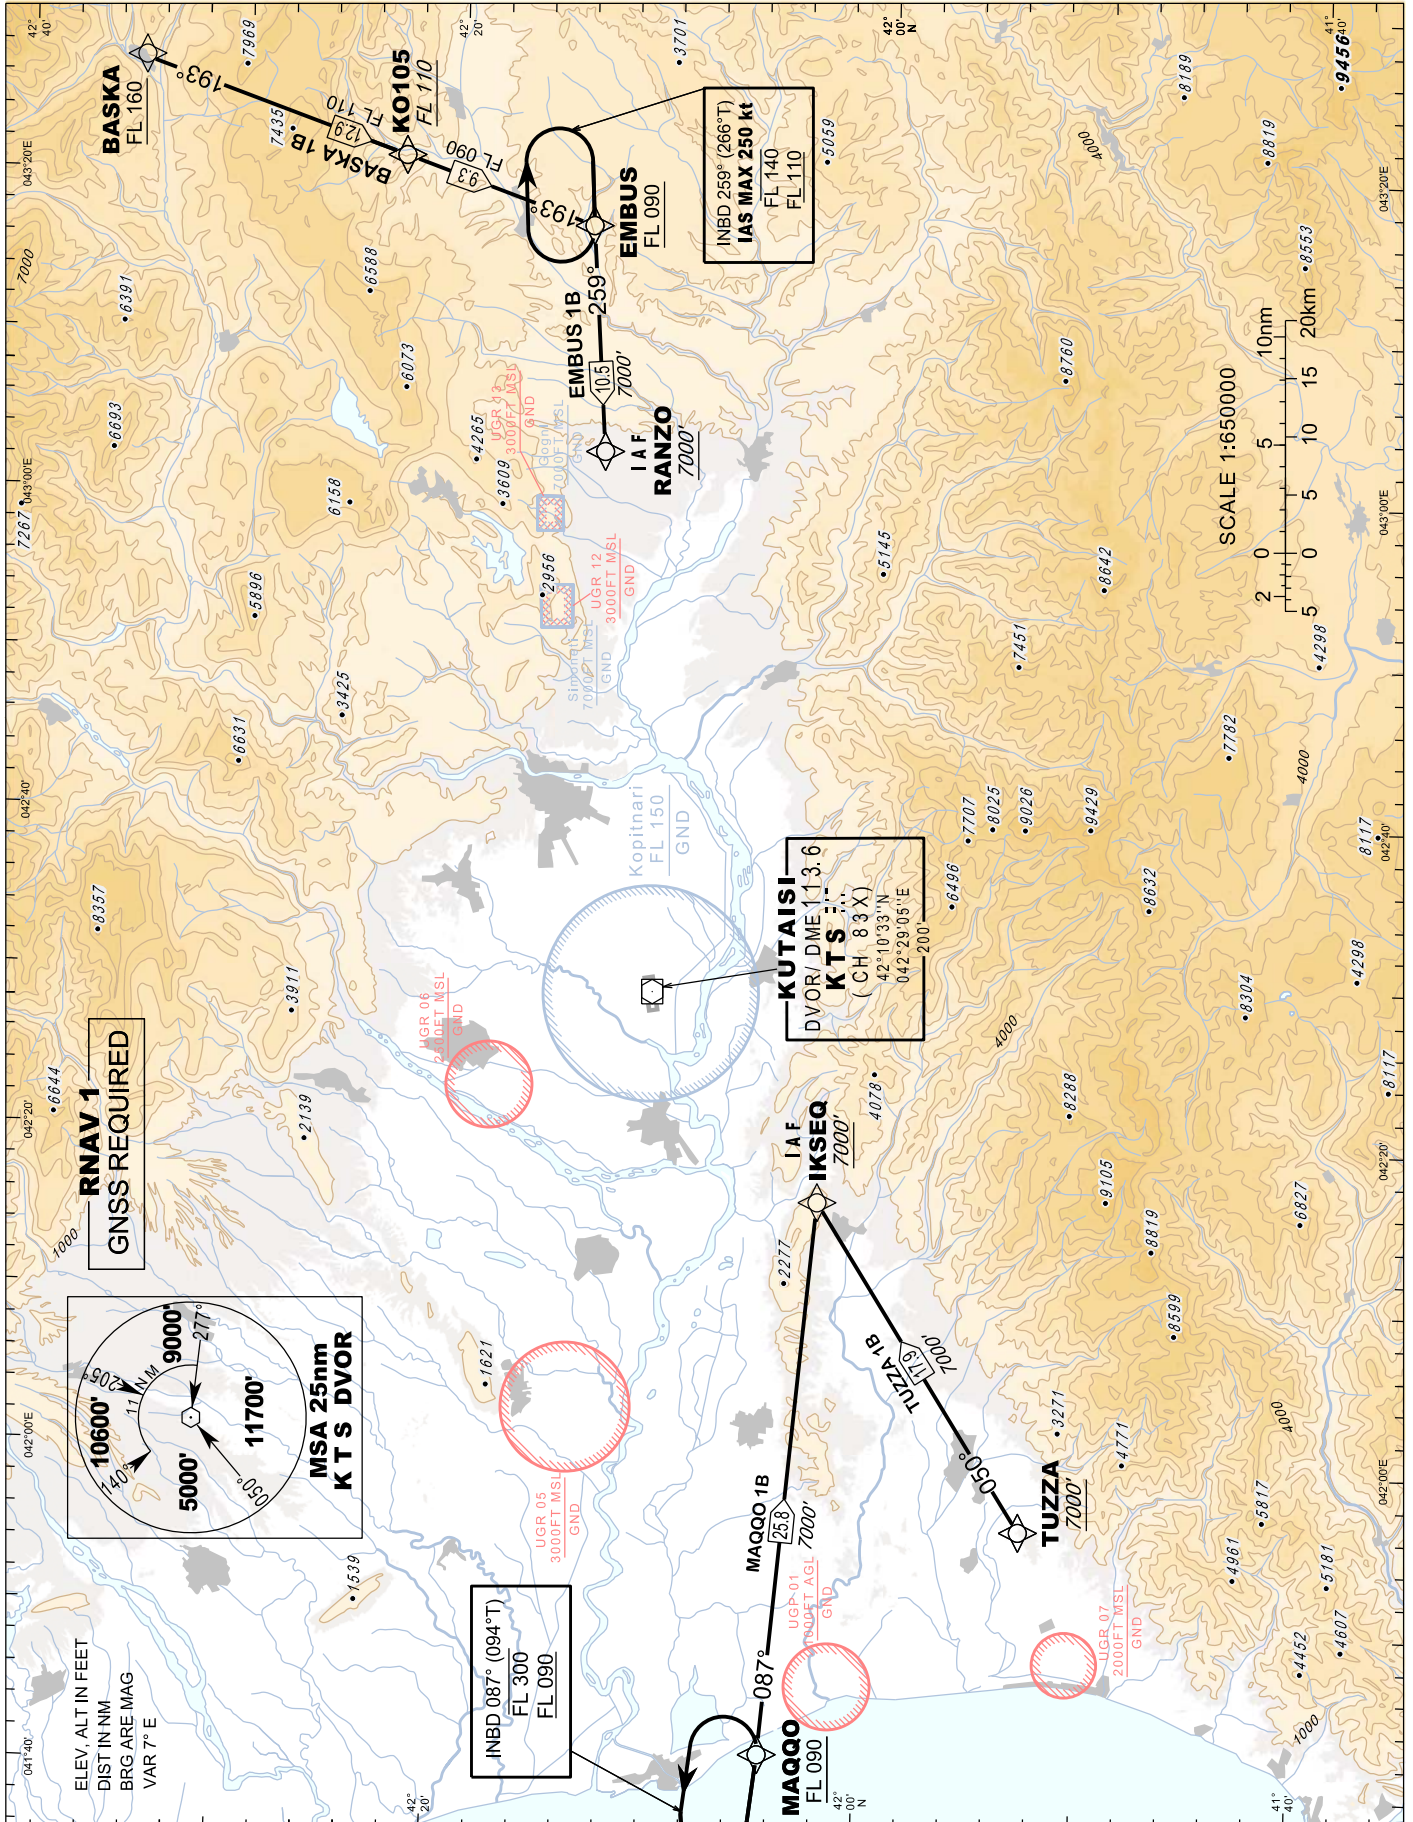

**RNAV 1
GNSS REQUIRED**



INBD 087° (094°T)
FL 300
FL 090

**KUTAISI
DVOR DME (13.6
KTS)
(CH 83 X)
(42° 10' 33" N
042° 29' 05" E)**

Changes: Added elevation of DME antenna

PAGE INTENTIONALLY LEFT BLANK

STANDARD ARRIVAL ROUTES - RNAV (GNSS) INSTRUMENT - RWY 25

RNAV 1 STAR Coding Table of BASKA 1B										
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification	
	Identifier	Flyover	Coordinates				Level	Speed kt		
IF	BASKA	-	42°34'59.0"N 043°26'55.0"E	-	-	-	+FL160	-	RNAV1	
TF	KO105	-	42°22'51.0"N 043°21'03.0"E	193° (199.7°)	12.9	-	+FL110	-	RNAV1	
TF	EMBUS	-	42°14'06.0"N 043°16'50.0"E	193° (199.6°)	9.3	-	+FL090	-	RNAV1	
TF	RANZO	-	42°13'23.0"N 043°02'44.0"E	259° (266.2°)	10.5	-	+A7000	-	RNAV1	

RNAV 1 STAR Coding Table of EMBUS 1B										
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification	
	Identifier	Flyover	Coordinates				Level	Speed kt		
IF	EMBUS	-	42°14'06.0"N 043°16'50.0"E	-	-	-	+FL090	-	RNAV1	
TF	RANZO	-	42°13'23.0"N 043°02'44.0"E	259° (266.2°)	10.5	-	+A7000	-	RNAV1	

RNAV 1 STAR Coding Table of MAQQO 1B										
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification	
	Identifier	Flyover	Coordinates				Level	Speed kt		
IF	MAQQO	-	42°04'32.0"N 041°41'44.0"E	-	-	-	+FL090	-	RNAV1	
TF	IKSEQ	-	42°02'37.0"N 042°16'14.0"E	087° (094.1°)	25.8	-	+A7000	-	RNAV1	

RNAV 1 STAR Coding Table of TUZZA 1B										
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification	
	Identifier	Flyover	Coordinates				Level	Speed kt		
IF	TUZZA	-	41°52'48.0"N 041°56'06.0"E	-	-	-	+A7000	-	RNAV1	
TF	IKSEQ	-	42°02'37.0"N 042°16'14.0"E	050° (056.6°)	17.9	-	+A7000	-	RNAV1	

RNAV Holding Coding Tables								
Fix Identifier	Inbound course °MAG(°True)	Time (min)	Turn Direction	Min alt.	Max alt.	Speed limit (kt)	Mag. VAR	Navigation Specification
MAQQO	087° (094.0°)	1.5*	L	FL090	FL300	280	-7°	RNAV1
EMBUS	259° (266.0°)	1.0	R	FL110	FL140	250	-7°	RNAV1

* 1.0 min at or below FL140

PAGE INTENTIONALLY LEFT BLANK


ATC SURVEILLANCE MINIMUM ALTITUDE CHART - ICAO

AERODROME ELEV 160'
TRANSITION ALTITUDE 7000'

APP 127.1
TWR 125.5

KUTAISI/Kopitnari (UGKO)

Changes: New edition

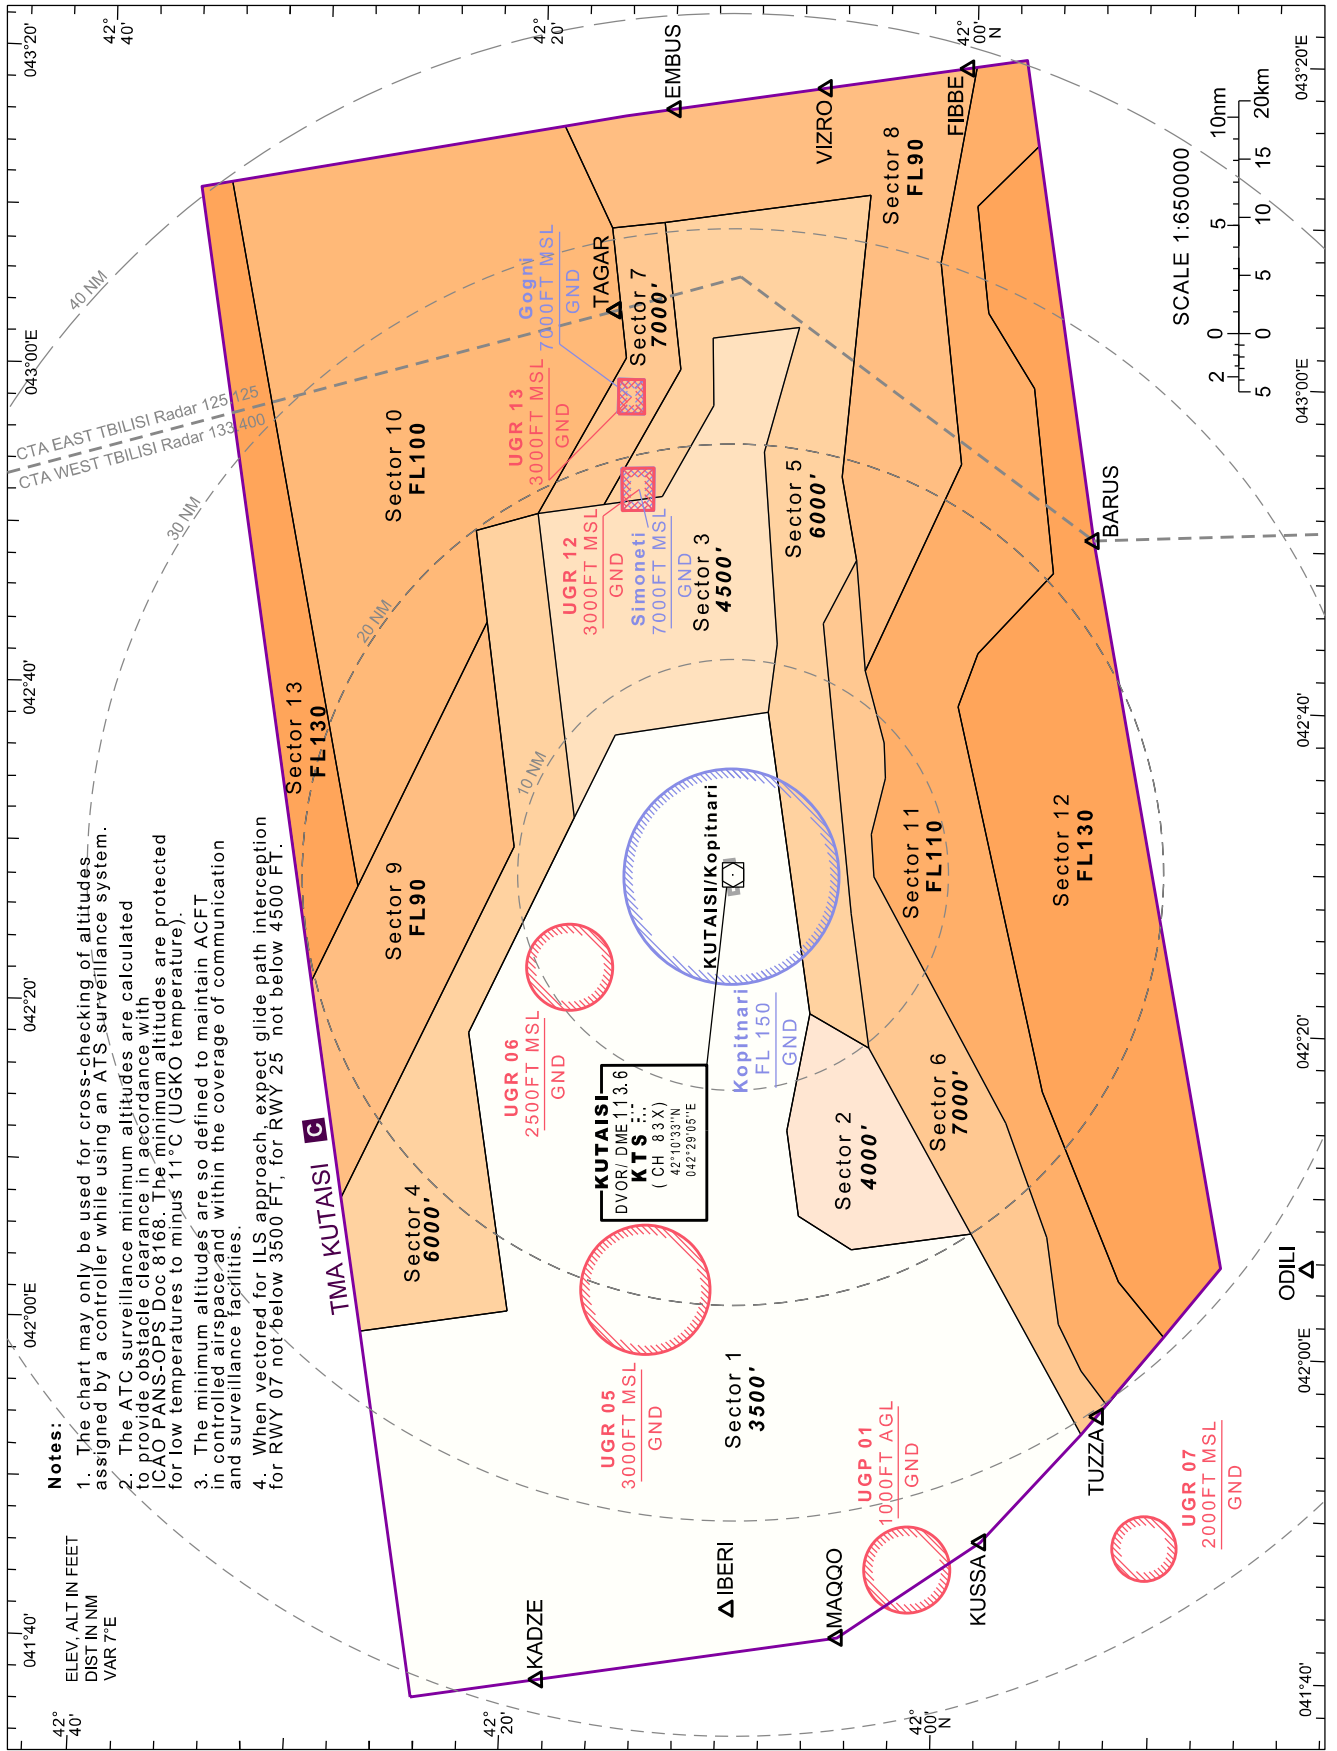

PAGE INTENTIONALLY LEFT BLANK

ATC Surveillance Minimum Altitude Sectors' Coordinates

Sector	Lateral limits
Sector 1	422413N 0413700E - 422712N 0415948E - 422024N 0420123E - 422237N 0421844E - 421800N 0423222E - 421613N 0423737E - 420908N 0423918E - 420648N 0422033E - 420742N 0421314E - 420701N 0420755E - 420432N 0420557E - 415900N 0420711E - 415334N 0415456E - 415803N 0414800E - 420432N 0414143E - 422413N 0413700E
Sector 2	415900N 0420711E - 420432N 0420557E - 420701N 0420755E - 420742N 0421314E - 420648N 0422033E - 420401N 0421833E - 415900N 0420711E
Sector 3	421800N 0423222E - 421831N 0423703E - 422004N 0425120E - 421701N 0425200E - 421419N 0425236E - 421202N 0425821E - 421208N 0430235E - 420808N 0430321E - 420938N 0425531E - 420848N 0424334E - 420908N 0423918E - 421613N 0423737E - 421800N 0423222E
Sector 4	422712N 0415948E - 422817N 0420808E - 422046N 0423027E - 422218N 0424428E - 422255N 0425011E - 422004N 0425120E - 421831N 0423703E - 421800N 0423222E - 422237N 0421844E - 422024N 0420123E - 422712N 0415948E
Sector 5	420648N 0422033E - 420908N 0423918E - 420848N 0424334E - 420938N 0425531E - 420808N 0430321E - 421208N 0430235E - 421202N 0425821E - 421419N 0425236E - 421701N 0425200E - 421336N 0430034E - 421429N 0430943E - 420457N 0431142E - 420559N 0425406E - 420513N 0424854E - 420641N 0424455E - 420502N 0422653E - 420401N 0421833E - 420648N 0422033E
Sector 6	415334N 0415456E - 415900N 0420711E - 420401N 0421833E - 420502N 0422653E - 420641N 0424455E - 420513N 0424854E - 420441N 0424202E - 420343N 0423735E - 420337N 0423523E - 420412N 0423153E - 420401N 0422914E - 415732N 0421407E - 415528N 0420706E - 415448N 0420145E - 415339N 0415854E - 415223N 0415648E - 415248N 0415606E - 415334N 0415456E
Sector 7	422004N 0425120E - 421608N 0430113E - 421655N 0430919E - 421429N 0430943E - 421336N 0430034E - 421701N 0425200E - 422004N 0425120E
Sector 8	420441N 0424202E - 420513N 0424854E - 420559N 0425406E - 420457N 0431142E - 421429N 0430943E - 421655N 0430919E - 421913N 0431538E - 421623N 0431621E - 420007N 0431948E - 420138N 0430735E - 420028N 0425503E - 420441N 0424202E
Sector 9	422817N 0420808E - 422959N 0422139E - 422758N 0422741E - 422218N 0424428E - 422046N 0423027E - 422817N 0420808E
Sector 10	422758N 0422741E - 423437N 0431144E - 421913N 0431538E - 421655N 0430919E - 421608N 0430113E - 422004N 0425120E - 422255N 0425011E - 422218N 0424428E - 422758N 0422741E
Sector 11	415223N 0415648E - 415339N 0415854E - 415448N 0420145E - 415528N 0420706E - 415732N 0421407E - 420401N 0422914E - 420412N 0423153E - 420337N 0423523E - 420343N 0423735E - 420441N 0424202E - 420028N 0425503E - 420138N 0430735E - 420007N 0431948E - 415748N 0432017E - 415711N 0431458E - 415958N 0431109E - 415921N 0430431E - 415709N 0425953E - 415604N 0424825E - 415928N 0424318E - 420020N 0423958E - 415554N 0421610E - 415204N 0420430E - 414953N 0420110E - 415223N 0415648E
Sector 12	414953N 0420110E - 415204N 0420430E - 41554N 0421610E - 420020N 0423958E - 415928N 0424318E - 415604N 0424825E - 415709N 0425953E - 415921N 0430431E - 415958N 0431109E - 415711N 0431458E - 415414N 0425030E - 414721N 0420533E - 414953N 0420110E
Sector 13	422959N 0422139E - 423602N 0431122E - 423437N 0431144E - 422758N 0422741E - 422959N 0422139E

PAGE INTENTIONALLY LEFT BLANK

**INSTRUMENT
APPROACH
CHART - ICAO**


AERODROME ELEV 160'
HEIGHTS RELATED TO
THR RWY 07 - ELEV 133'

APP 127.100
TWR 125.500

KUTAISI/Kopitnari (UGKO)


**ILSy
RWY 07**

TRANSITION ALT 7000'

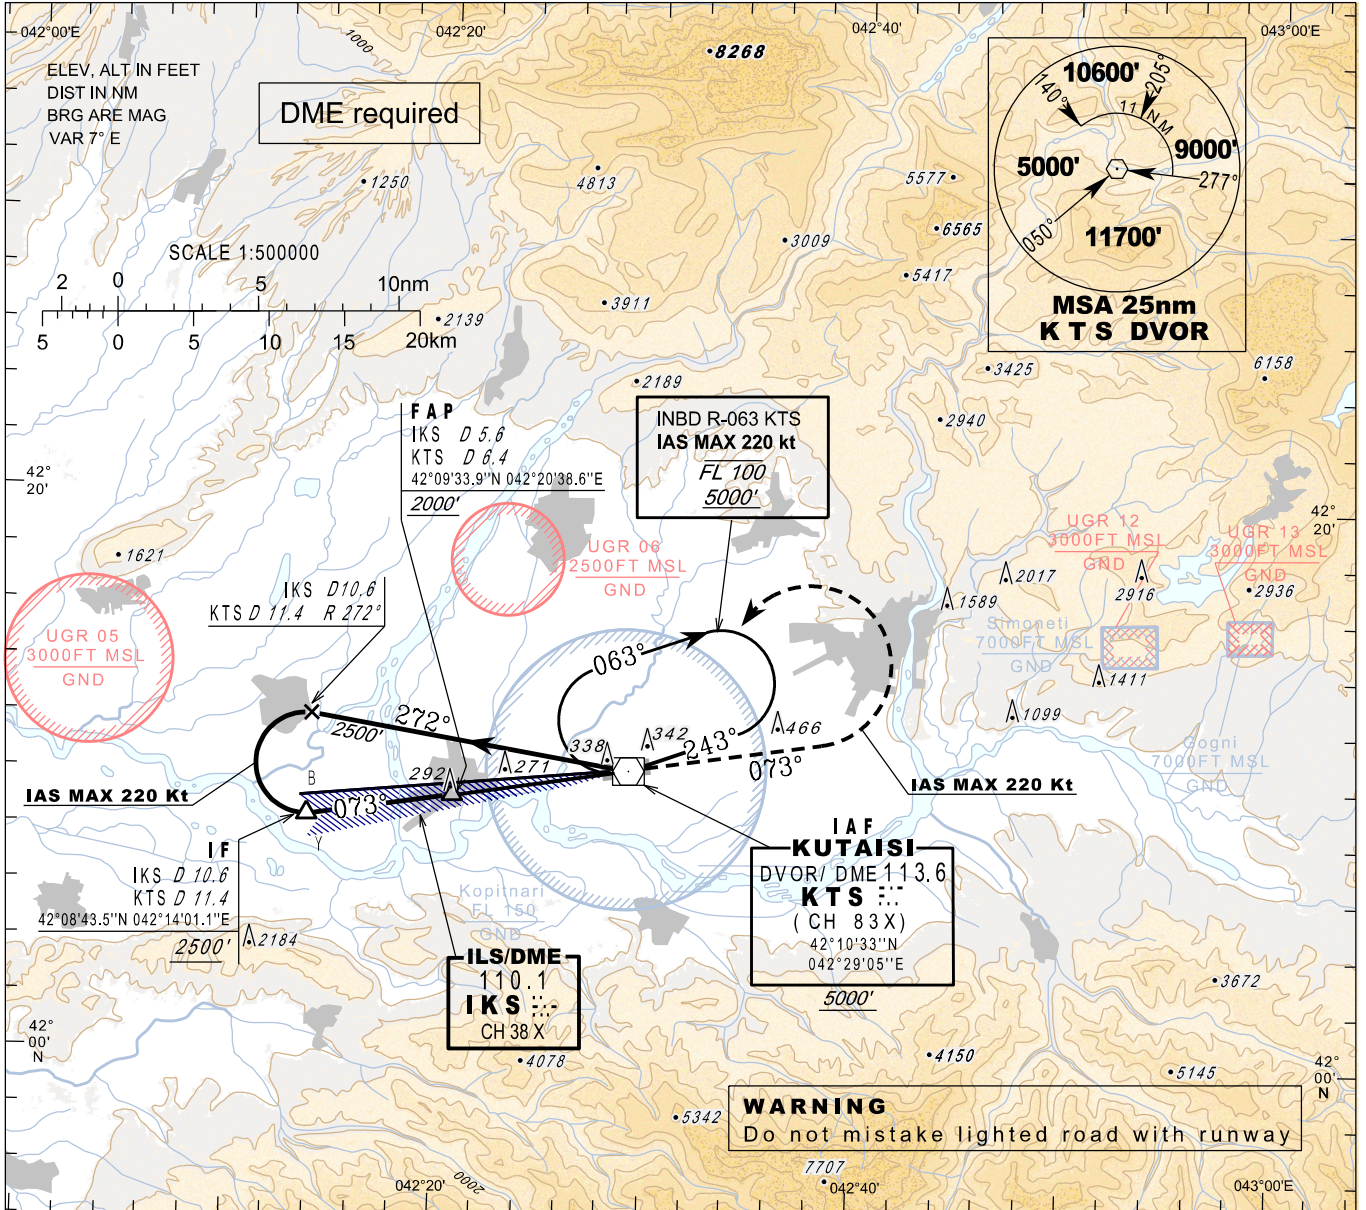

MISSED APPROACH

- Normal:** Climb straight ahead to 3500', at 7 NM DME KTS (7.4 NM DME IKS) turn left inbound KTS and follow ATC instructions. IAS MAX 220kt
- KTS DVOR Unserviceable:** Climb straight ahead to 3500', at 7 NM DME KTS (7.4 NM DME IKS) turn left heading 255°, expect vectoring. IAS MAX 220kt
- Radio Communication Failure:** Climb straight ahead to 5000', at 7 NM DME KTS (7.4 NM DME IKS) turn left inbound KTS, hold as published, when ready make new approach (ILS y or LOC y or VOR). IAS MAX 220kt

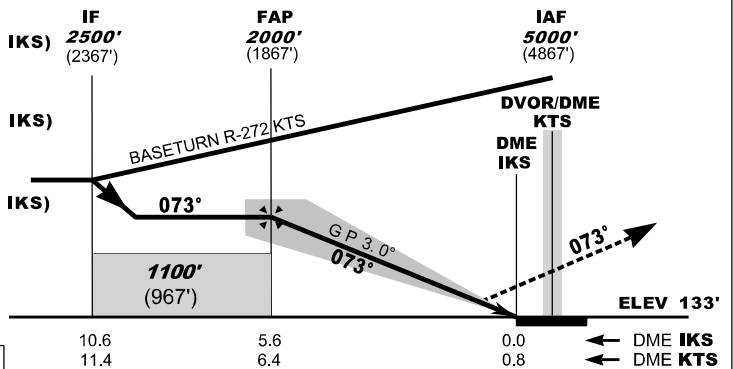

Changes: Flight procedures

Straight-in Approach	A	B	C	D
OCA(H)	311 (178)	321 (188)	331 (198)	341 (208)
DME IKS NM			5	4
DME KTS NM			5.8	4.8
ALT (HGT) ft			1798 (1665)	1472 (1339)

10.6 11.4 5.6 6.4 0.0 0.8 ← DME IKS ← DME KTS

ILS RDH 51'


PAGE INTENTIONALLY LEFT BLANK

**INSTRUMENT
APPROACH
CHART - ICAO**

AERODROME ELEV 160'
HEIGHTS RELATED TO
THR RWY 07 - ELEV 133'
TRANSITION ALT 7000'

APP 127.100
TWR 125.500

**KUTAISI/Kopitnari (UGKO)
ILSz
RWY 07**

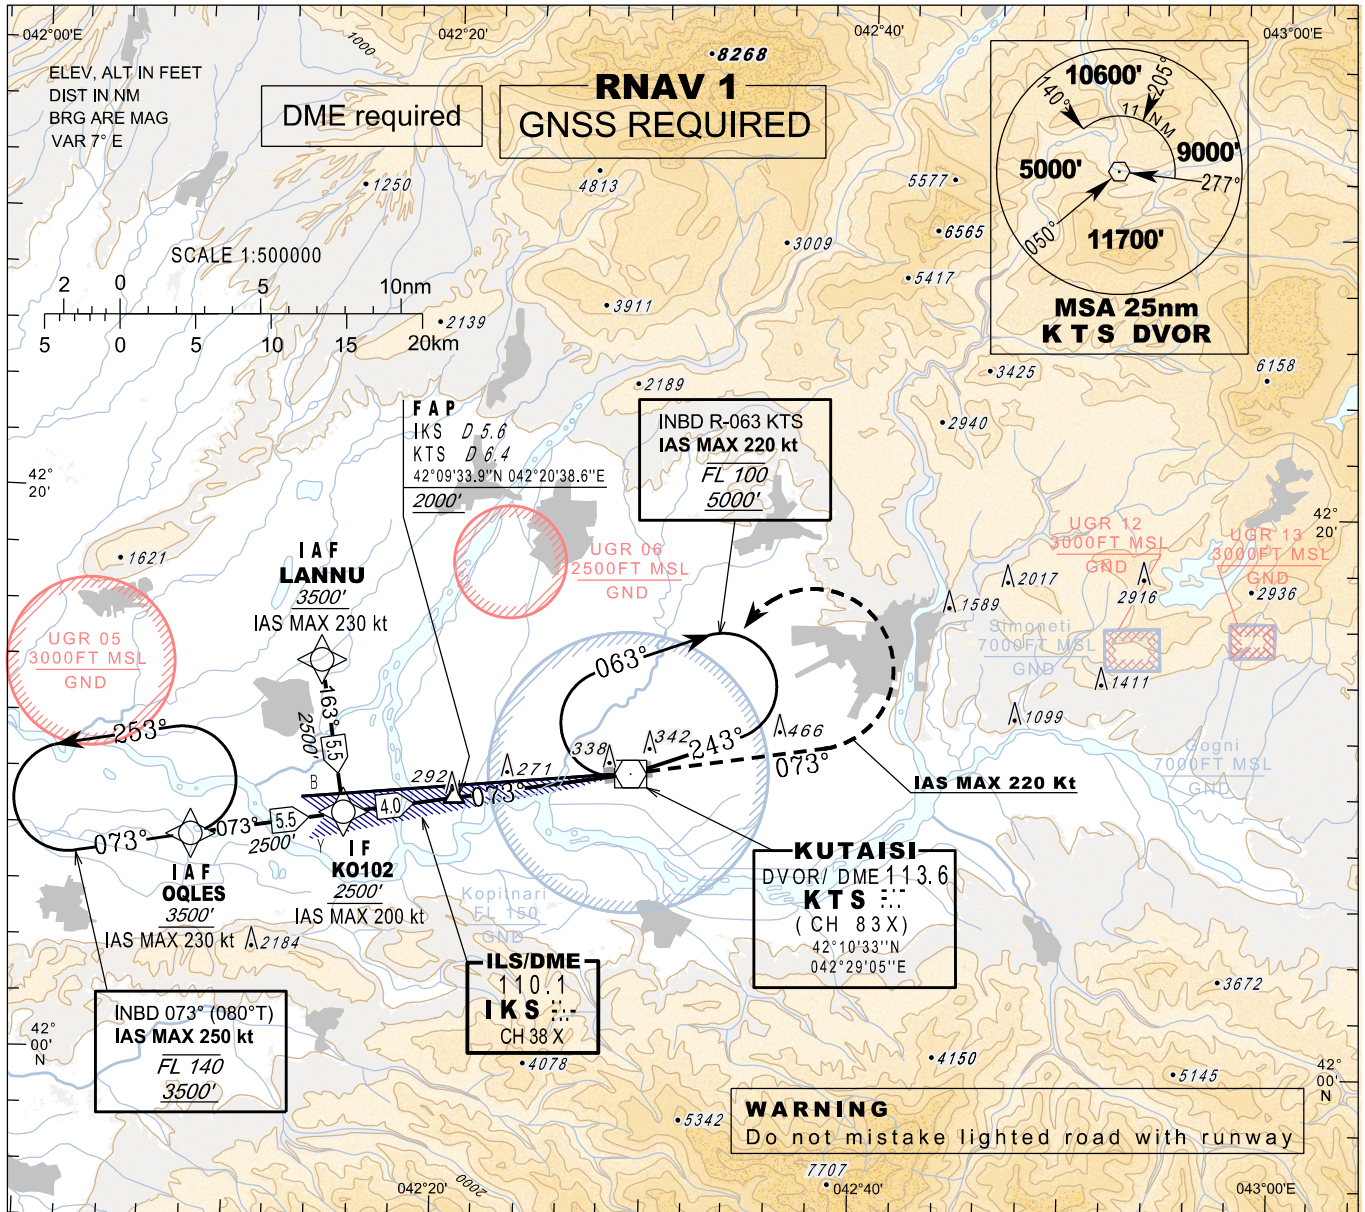


MISSED APPROACH

Normal:
Climb straight ahead to 3500', at 7 NM DME KTS (7.4 NM DME IKS) turn left inbound KTS and follow ATC instructions.
IAS MAX 220kt

KTS DVOR Unserviceable:
Climb straight ahead to 3500', at 7 NM DME KTS (7.4 NM DME IKS) turn left heading 255°, expect vectoring.
IAS MAX 220kt

Radio Communication Failure:
Climb straight ahead to 5000', at 7 NM DME KTS (7.4 NM DME IKS) turn left inbound KTS, hold as published, when ready make new approach (ILS y or LOC y or VOR).
IAS MAX 220kt

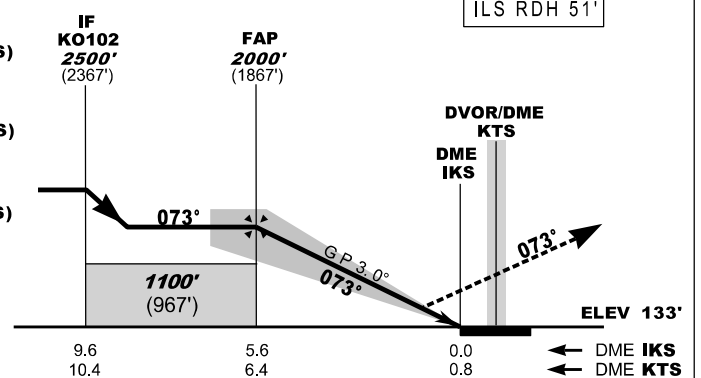

Straight-in Approach	A	B	C	D
OCA(H)	311 (178)	321 (188)	331 (198)	341 (208)
DME IKS NM			5	4
DME KTS NM			5.8	4.8
ALT (HGT) ft			1798 (1665)	1472 (1339)

	9.6	5.6	0.0
	10.4	6.4	0.8

Changes: Flight procedures

PAGE INTENTIONALLY LEFT BLANK

RNAV Transition Coding Tables - RWY 07 ILSz

LANNU transition										
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification	
	Identifier	Flyover	Coordinates				Level	Speed kt		
IF	LANNU	-	42°14'19.0"N 042°14'06.0"E	-	-	-	+A3500	-230	RNAV1	
TF	KO102	-	42°08'53.6"N 042°15'20.6"E	163° (170.3°)	5.5	-	+A2500	-200	RNAV1	

OQLES transition										
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification	
	Identifier	Flyover	Coordinates				Level	Speed kt		
IF	OQLES	-	42°07'58.0"N 042°08'03.0"E	-	-	-	+A3500	-230	RNAV1	
TF	KO102	-	42°08'53.6"N 042°15'20.6"E	073° (080.2°)	5.5	-	+A2500	-200	RNAV1	

RNAV Holding Coding Table								
Fix Identifier	Inbound course °MAG(°True)	Time (min)	Turn Direction	Min alt.	Max alt.	Speed limit (kt)	Mag. VAR	Navigation Specification
OQLES	073° (080.0°)	1.0	L	A3500	FL140	250	-7°	RNAV1


PAGE INTENTIONALLY LEFT BLANK

**INSTRUMENT
APPROACH
CHART - ICAO**

**KUTAISI/Kopitnari (UGKO)
LOCy
RWY 07**

AERODROME ELEV 160'
HEIGHTS RELATED TO
THR RWY 07 - ELEV 133'
TRANSITION ALT 7000'

APP 127.100
TWR 125.500

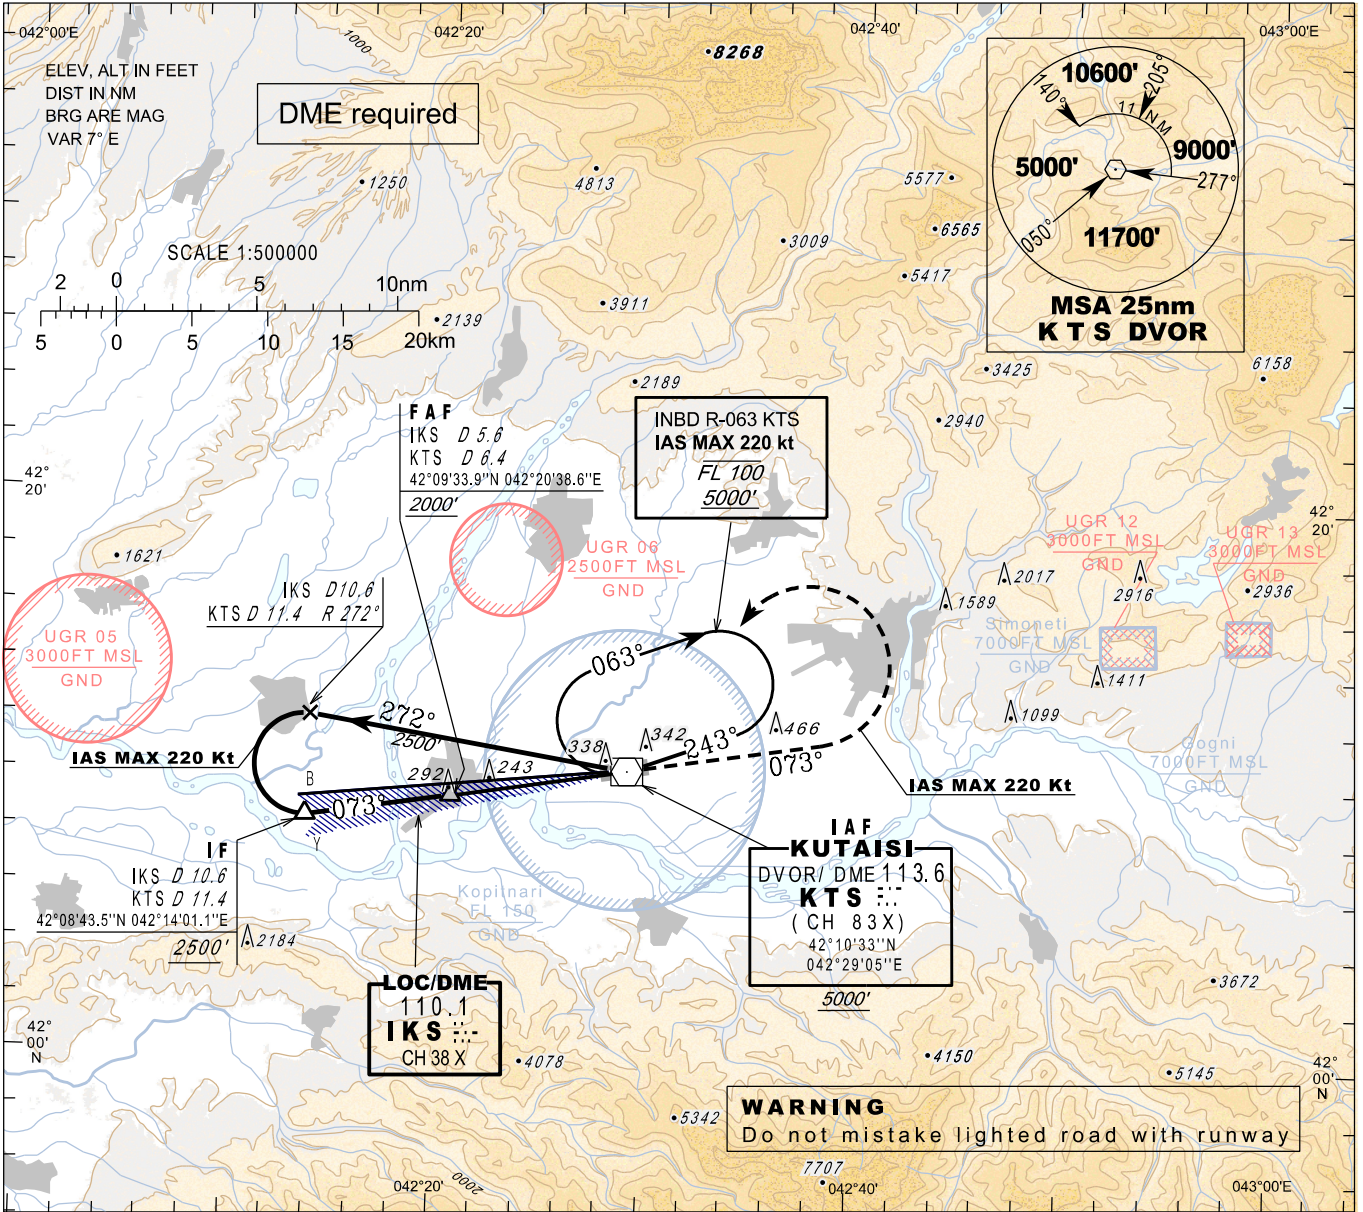


MISSED APPROACH

Normal:
Climb straight ahead to 3500', at 7 NM DME KTS (7.4 NM DME IKS) turn left inbound **KTS** and follow **ATC** instructions.
IAS MAX 220kt

KTS DVOR Unserviceable:
Climb straight ahead to 3500', at 7 NM DME KTS (7.4 NM DME IKS) turn left heading 255°, expect vectoring.
IAS MAX 220kt

Radio Communication Failure:
Climb straight ahead to 5000', at 7 NM DME KTS (7.4 NM DME IKS) turn left inbound **KTS**, hold as published, when ready make new approach (ILS y or LOC y or VOR).
IAS MAX 220kt

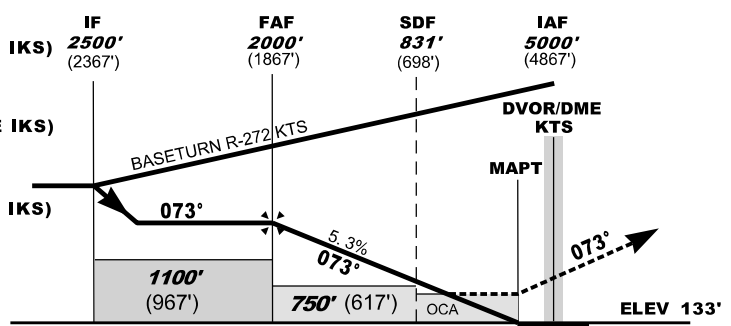

Straight-in Approach	A	B	C	D	Timing is not authorised for defining the MAPT
	OCA(H) 480 (340)				
DME IKS NM	5	4	3	2	1
DME KTS NM	5.8	4.8	3.8	2.8	1.8
ALT (HGT) ft	1805 (1672)	1481 (1348)	1156 (1023)	831 (698)	507 (374)

Changes: Flight procedures


PAGE INTENTIONALLY LEFT BLANK

**INSTRUMENT
APPROACH
CHART - ICAO**


AERODROME ELEV 160'
HEIGHTS RELATED TO
THR RWY 07 - ELEV 133'
TRANSITION ALT 7000'

APP 127.100
TWR 125.500

**KUTAISI/Kopitnari (UGKO)
LOCz
RWY 07**

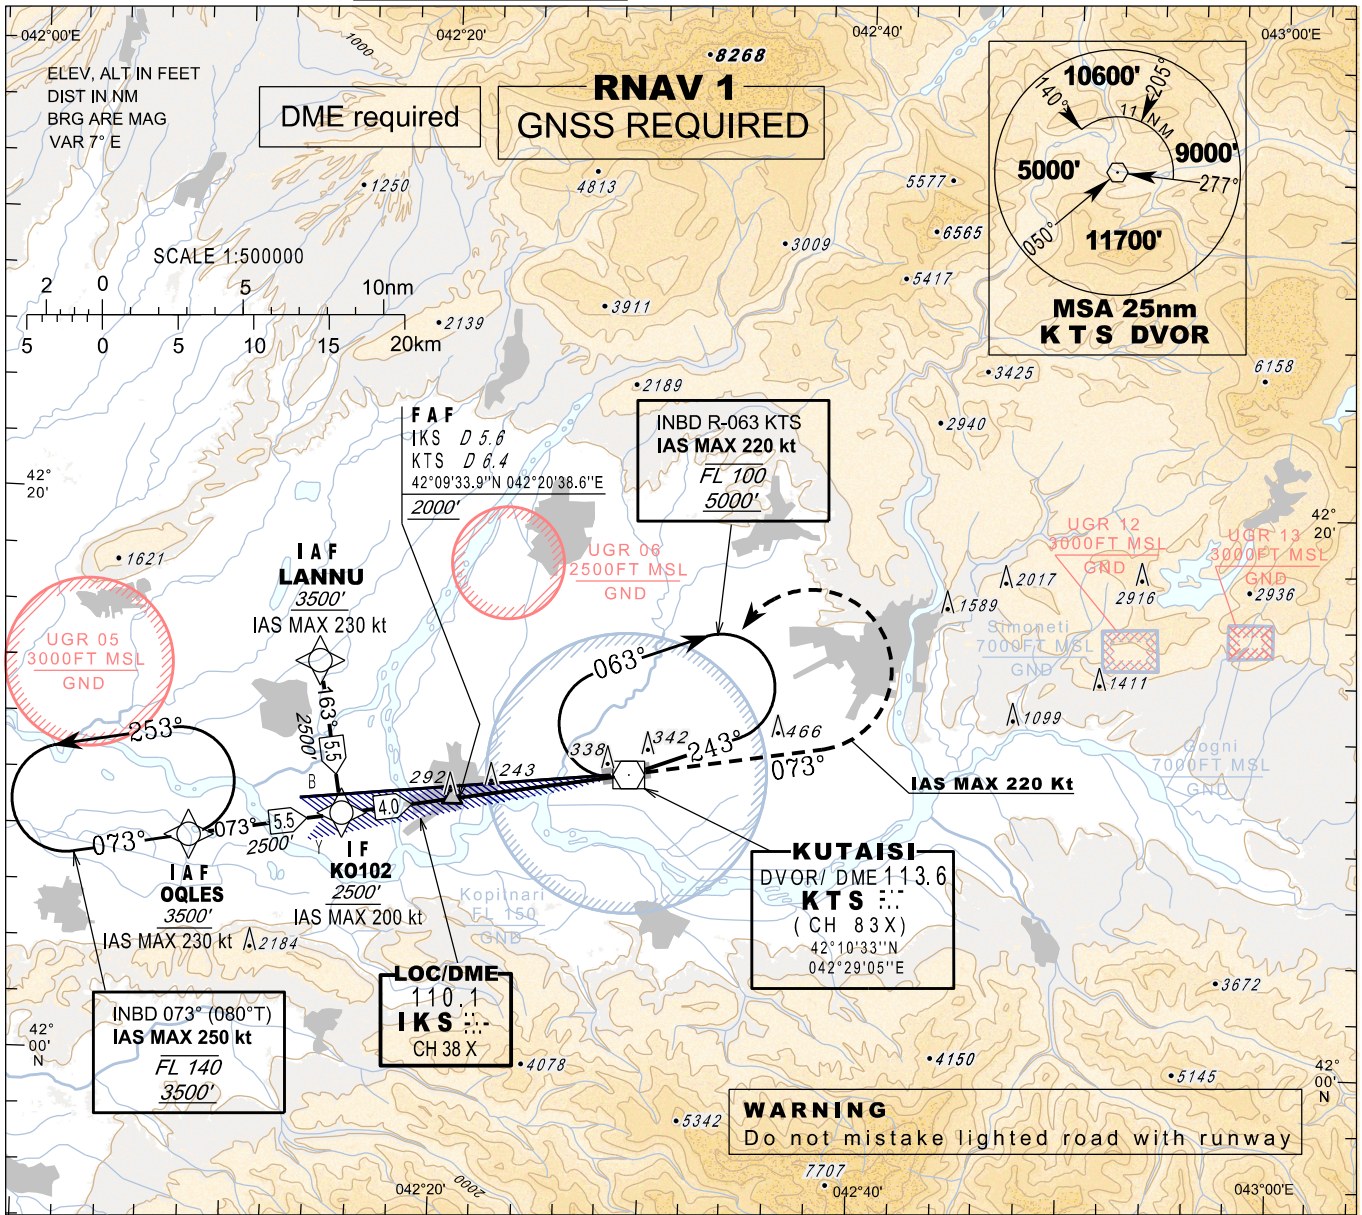

MISSED APPROACH
Normal:
Climb straight ahead to 3500', at 7 NM DME KTS (7.4 NM DME IKS) turn left inbound **KTS** and follow **ATC** instructions.
IAS MAX 220kt
KTS DVOR Unserviceable:
Climb straight ahead to 3500', at 7 NM DME KTS (7.4 NM DME IKS) turn left heading **255°**, expect vectoring.
IAS MAX 220kt
Radio Communication Failure:
Climb straight ahead to 5000', at 7 NM DME KTS (7.4 NM DME IKS) turn left inbound **KTS**, hold as published, when ready make new approach (ILS y or LOC y or VOR).
IAS MAX 220kt

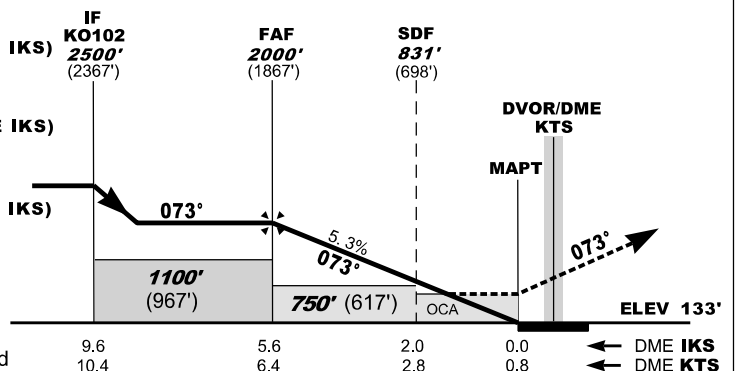

Straight-in Approach	A	B	C	D	Timing is not authorised for defining the MAPT
	OCA(H) 480 (340)				
DME IKS NM	5	4	3	2	1
DME KTS NM	5.8	4.8	3.8	2.8	1.8
ALT (HGT) ft	1805 (1672)	1481 (1348)	1156 (1023)	831 (698)	507 (374)

Changes: Flight procedures

PAGE INTENTIONALLY LEFT BLANK

RNAV Transition Coding Tables - RWY 07 LOCz

LANNU transition										
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification	
	Identifier	Flyover	Coordinates				Level	Speed kt		
IF	LANNU	-	42°14'19.0"N 042°14'06.0"E	-	-	-	+A3500	-230	RNAV1	
TF	KO102	-	42°08'53.6"N 042°15'20.6"E	163° (170.3°)	5.5	-	+A2500	-200	RNAV1	

OQLES transition										
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification	
	Identifier	Flyover	Coordinates				Level	Speed kt		
IF	OQLES	-	42°07'58.0"N 042°08'03.0"E	-	-	-	+A3500	-230	RNAV1	
TF	KO102	-	42°08'53.6"N 042°15'20.6"E	073° (080.2°)	5.5	-	+A2500	-200	RNAV1	

RNAV Holding Coding Table								
Fix Identifier	Inbound course °MAG(°True)	Time (min)	Turn Direction	Min alt.	Max alt.	Speed limit (kt)	Mag. VAR	Navigation Specification
OQLES	073° (080.0°)	1.0	L	A3500	FL140	250	-7°	RNAV1

PAGE INTENTIONALLY LEFT BLANK


**INSTRUMENT
APPROACH
CHART - ICAO**

AERODROME ELEV 160'
HEIGHTS RELATED TO
THR RWY 25 - ELEV 160'
TRANSITION ALT 7000'

APP 127.100
TWR 125.500


KUTAISI/Kopitnari (UGKO)

**ILSy
RWY 25**

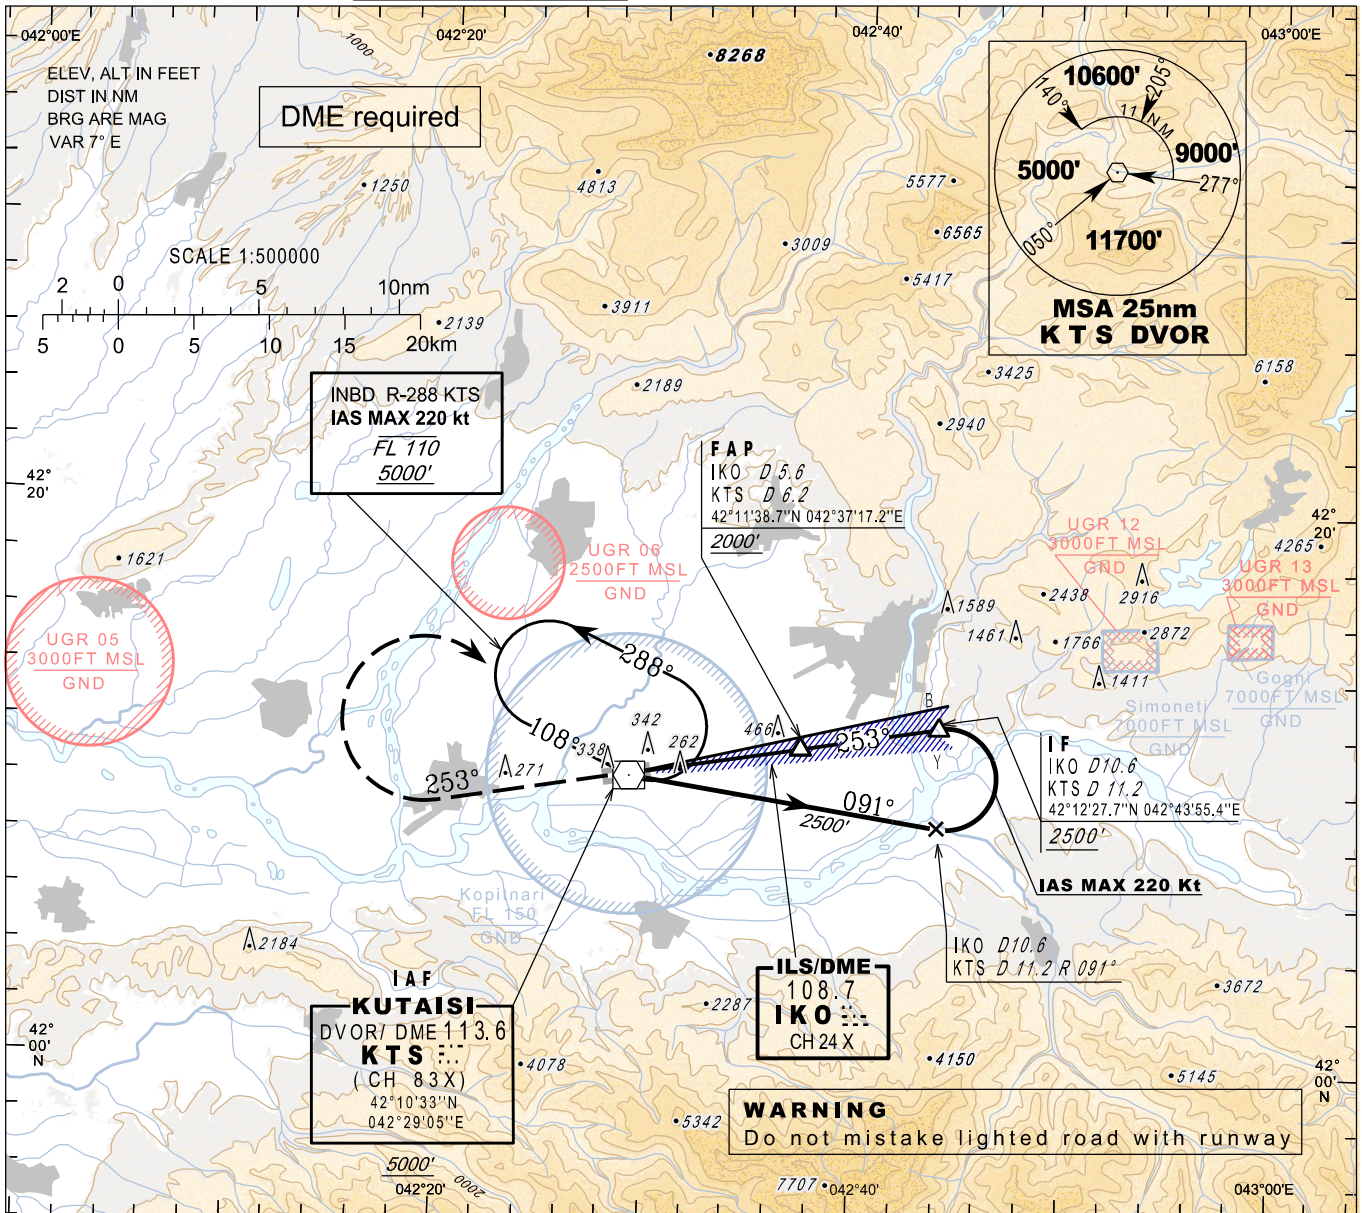

MISSED APPROACH

Normal: Climb straight ahead to 3500', at 7 NM DME KTS (7.2 NM DME IKO) turn right inbound **KTS** and follow **ATC** instructions.
KTS DVOR Unserviceable: Climb straight ahead to 4500', expect vectoring.
Radio Communication Failure: Climb straight ahead to 5000', at 7 NM DME KTS (7.2 NM DME IKO) turn right inbound **KTS**, hold as published, when ready make new approach (ILSy or LOCy or VOR).

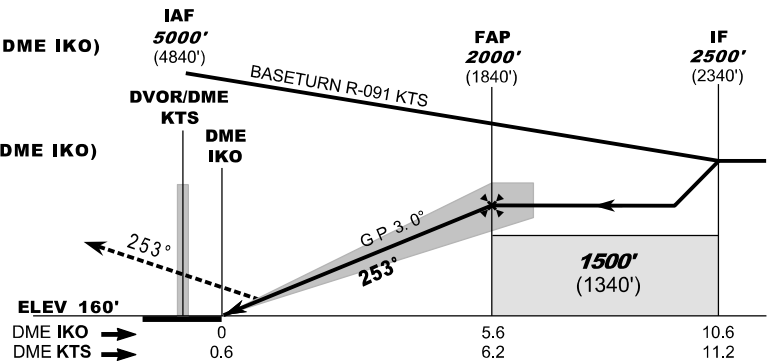

Straight-in Approach	A	B	C	D
	OCA(H)	330 (170)	340 (180)	350 (190)
DME IKO NM		5	4	3
DME KTS NM		5.6	4.6	3.6
ALT (HGT) ft		1825 (1665)	1499 (1339)	1174 (1014)

ILS RDH 51'

Changes: Flight procedures

PAGE INTENTIONALLY LEFT BLANK

**INSTRUMENT
APPROACH
CHART - ICAO**


KUTAISI/Kopitnari (UGKO)

**ILS
RWY 25**

AERODROME ELEV 160'
HEIGHTS RELATED TO
THR RWY 25 - ELEV 160'

APP 127.100
TWR 125.500


TRANSITION ALT 7000'

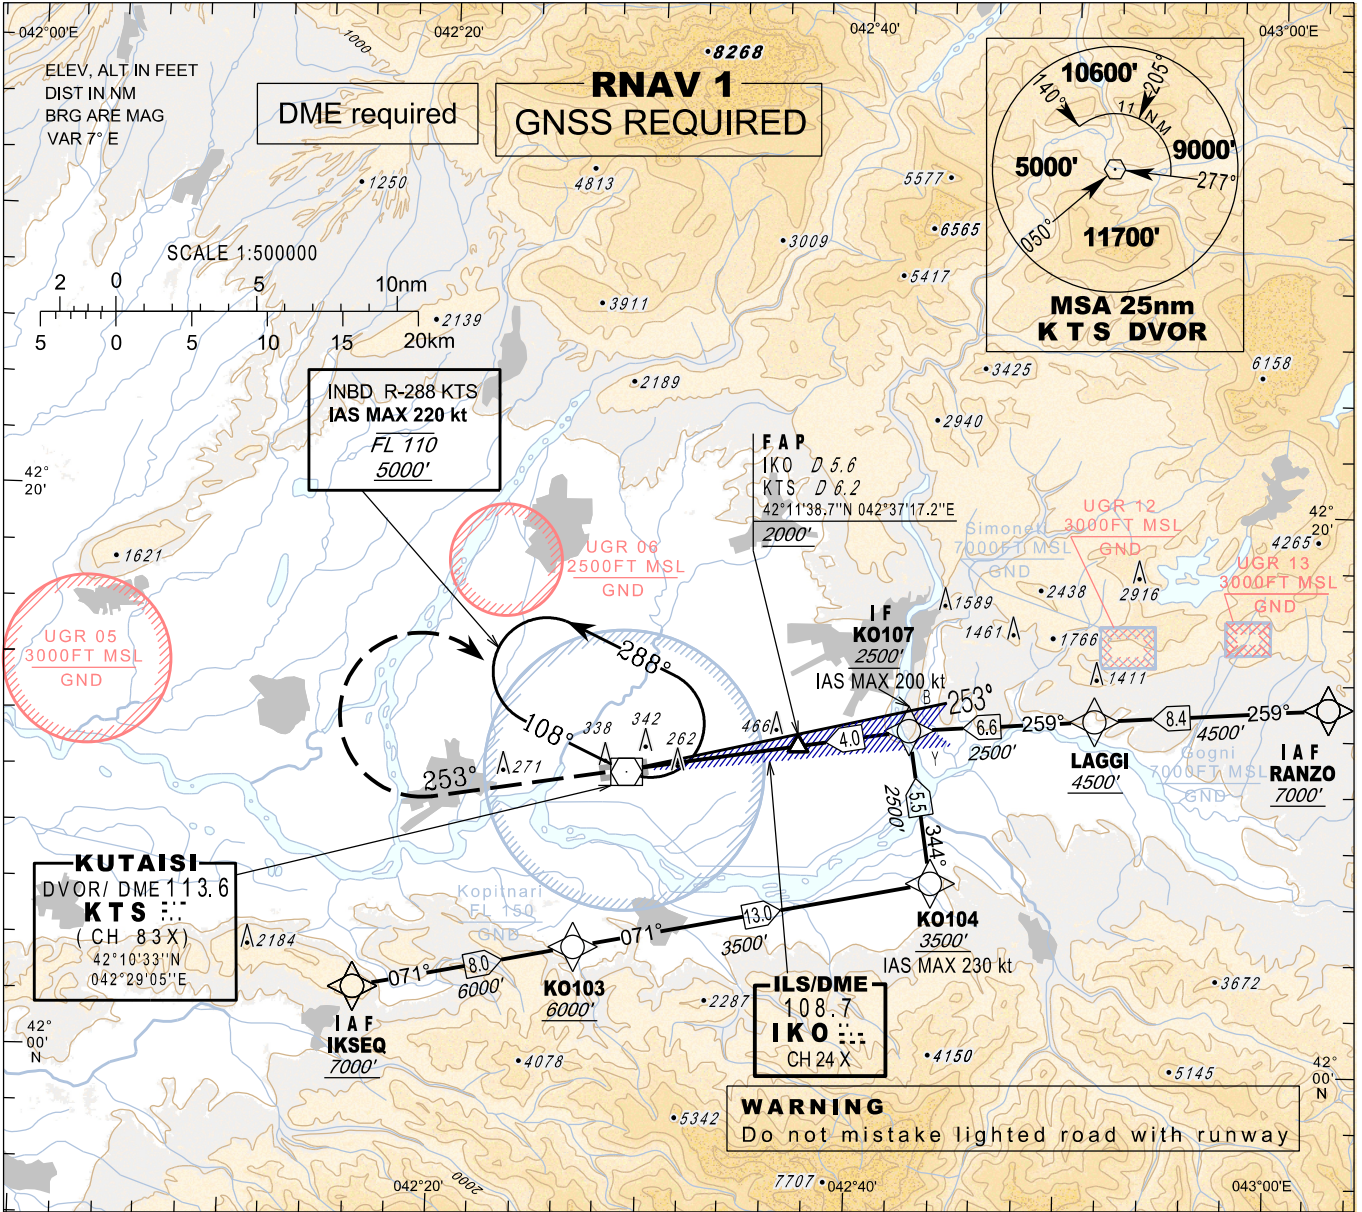

MISSED APPROACH

- Normal:** Climb straight ahead to 3500', at 7 NM DME KTS (7.2 NM DME IKO) turn right inbound **KTS** and follow **ATC** instructions.
- KTS DVOR Unserviceable:** Climb straight ahead to 4500', expect vectoring.
- Radio Communication Failure:** Climb straight ahead to 5000', at 7 NM DME KTS (7.2 NM DME IKO) turn right inbound **KTS**, hold as published, when ready make new approach (ILS or LOC or VOR).

ILS RDH 51'

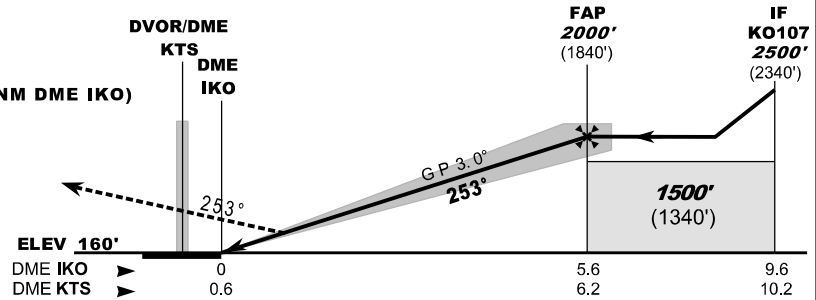

Changes: Flight procedures

Straight-in Approach	A	B	C	D
OCA(H)	330 (170)	340 (180)	350 (190)	360 (200)
DME IKO NM		5	4	3
DME KTS NM		5.6	4.6	3.6
ALT (HGT) ft		1825 (1665)	1499 (1339)	1174 (1014)
			851 (691)	530 (370)

PAGE INTENTIONALLY LEFT BLANK

RNAV Transition Coding Tables - RWY 25 ILSz

IKSEQ transition										
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification	
	Identifier	Flyover	Coordinates				Level	Speed kt		
IF	IKSEQ	-	42°02'37.0"N 042°16'14.0"E	-	-	-	+A7000	-	RNAV1	
TF	KO103	-	42°04'15.0"N 042°26'45.0"E	071° (078.1°)	8.0	-	+A6000	-	RNAV1	
TF	KO104	-	42°06'52.0"N 042°43'48.0"E	071° (078.2°)	13.0	-	+A3500	-230	RNAV1	
TF	KO107	-	42°12'18.0"N 042°42'36.0"E	344° (350.7°)	5.5	-	+A2500	-200	RNAV1	

RANZO transition										
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification	
	Identifier	Flyover	Coordinates				Level	Speed kt		
IF	RANZO	-	42°13'23.0"N 043°02'44.0"E	-	-	-	+A7000	-	RNAV1	
TF	LAGGI	-	42°12'47.0"N 042°51'30.0"E	259° (265.9°)	8.4	-	+A4500	-	RNAV1	
TF	KO107	-	42°12'18.0"N 042°42'36.0"E	259° (265.9°)	6.6	-	+A2500	-200	RNAV1	

PAGE INTENTIONALLY LEFT BLANK

**INSTRUMENT
APPROACH
CHART - ICAO**


AERODROME ELEV 160'
HEIGHTS RELATED TO
THR RWY 25 - ELEV 160'

APP 127.100
TWR 125.500

KUTAI SI/Kopitnari (UGKO)

**LOCy
RWY 25**


TRANSITION ALT 7000'

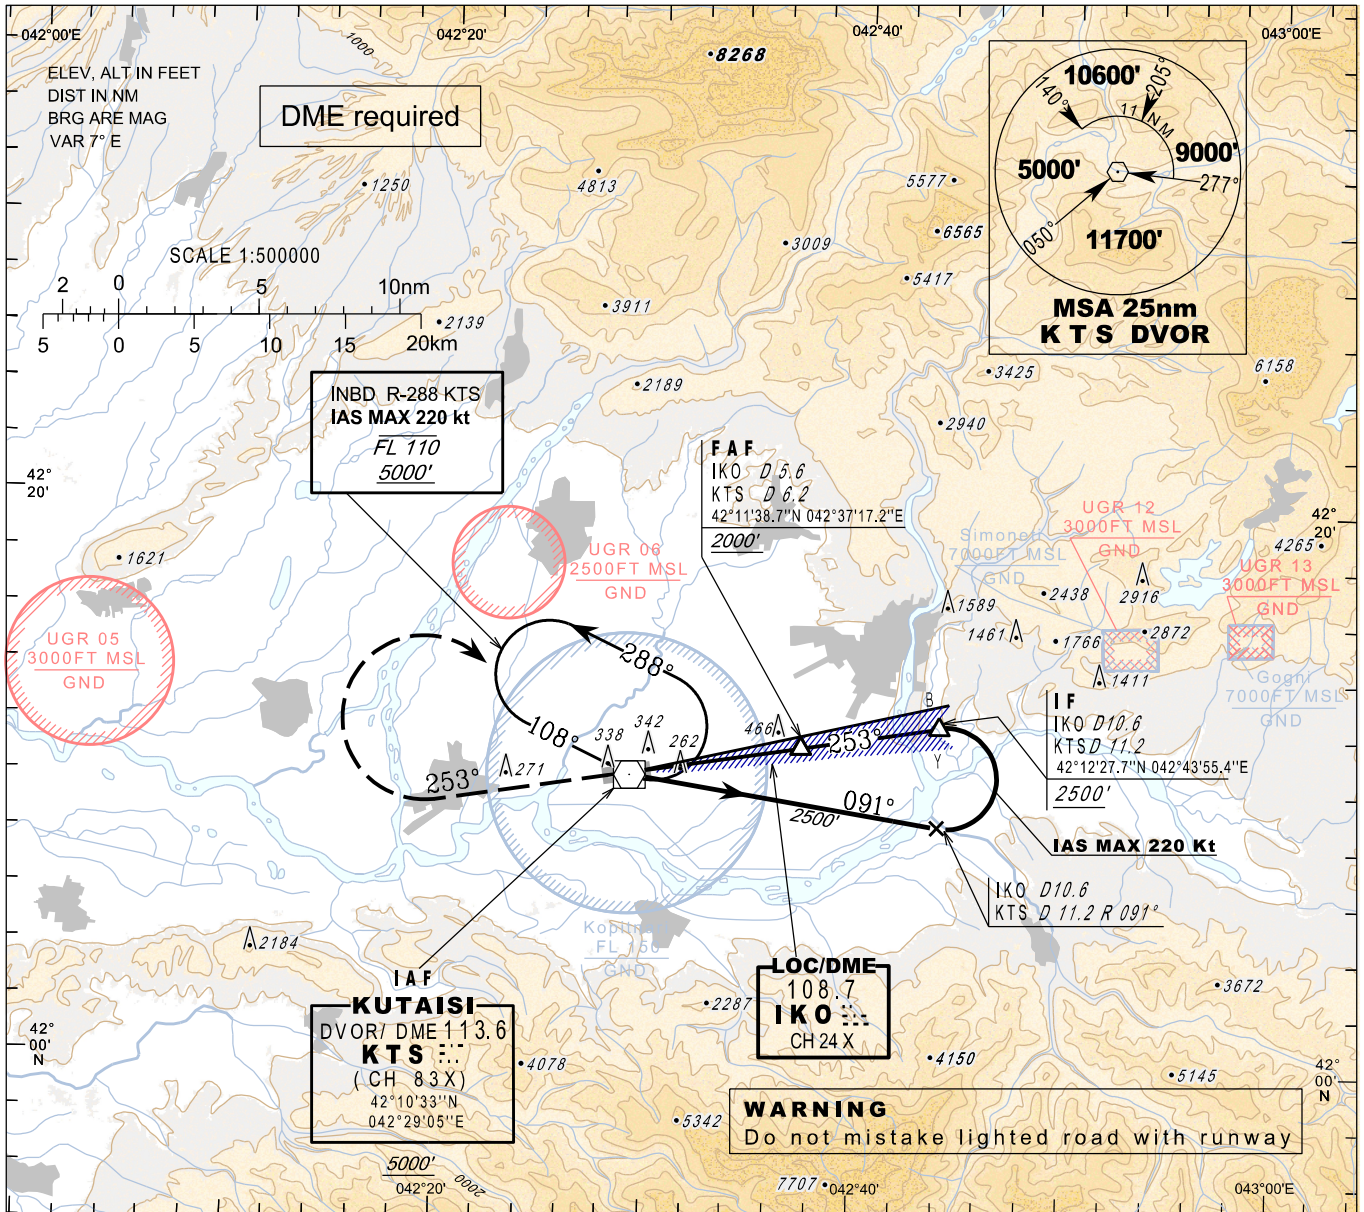

MISSED APPROACH

Normal:
Climb straight ahead to 3500', at 7 NM DME KTS (7.2 NM DME IKO) turn right inbound KTS and follow ATC instructions.
KTS DVOR Unserviceable:
Climb straight ahead to 4500', expect vectoring.
Radio Communication Failure:
Climb straight ahead to 5000', at 7 NM DME KTS (7.2 NM DME IKO) turn right inbound KTS, hold as published, when ready make new approach (ILS y or LOC y or VOR).

Timing is not authorised for defining the MAPT

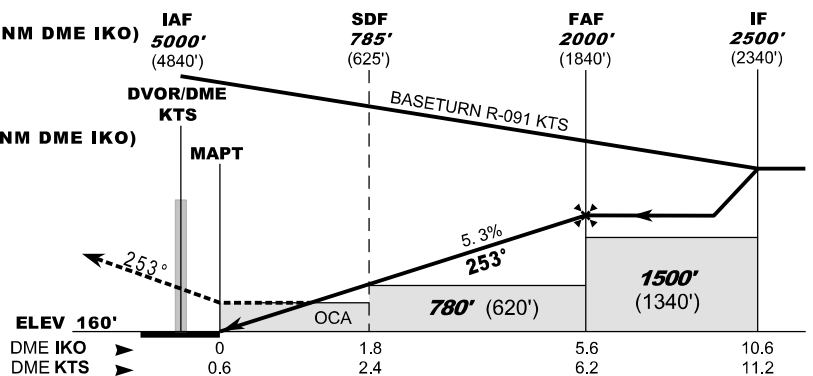

Straight-in Approach	A	B	C	D
OCA(H)	510 (350)			

DME IKO NM	5	4	3	2	1
DME KTS NM	5.6	4.6	3.6	2.6	1.6
ALT (HGT) ft	1808 (1648)	1488 (1328)	1169 (1009)	849 (689)	529 (369)

Changes: Flight procedures

PAGE INTENTIONALLY LEFT BLANK

**INSTRUMENT
APPROACH
CHART - ICAO**


AERODROME ELEV 160'
HEIGHTS RELATED TO
THR RWY 25 - ELEV 160'

APP 127.100
TWR 125.500

KUTAI SI/Kopitnari (UGKO)

**LOCz
RWY 25**

TRANSITION ALT 7000'

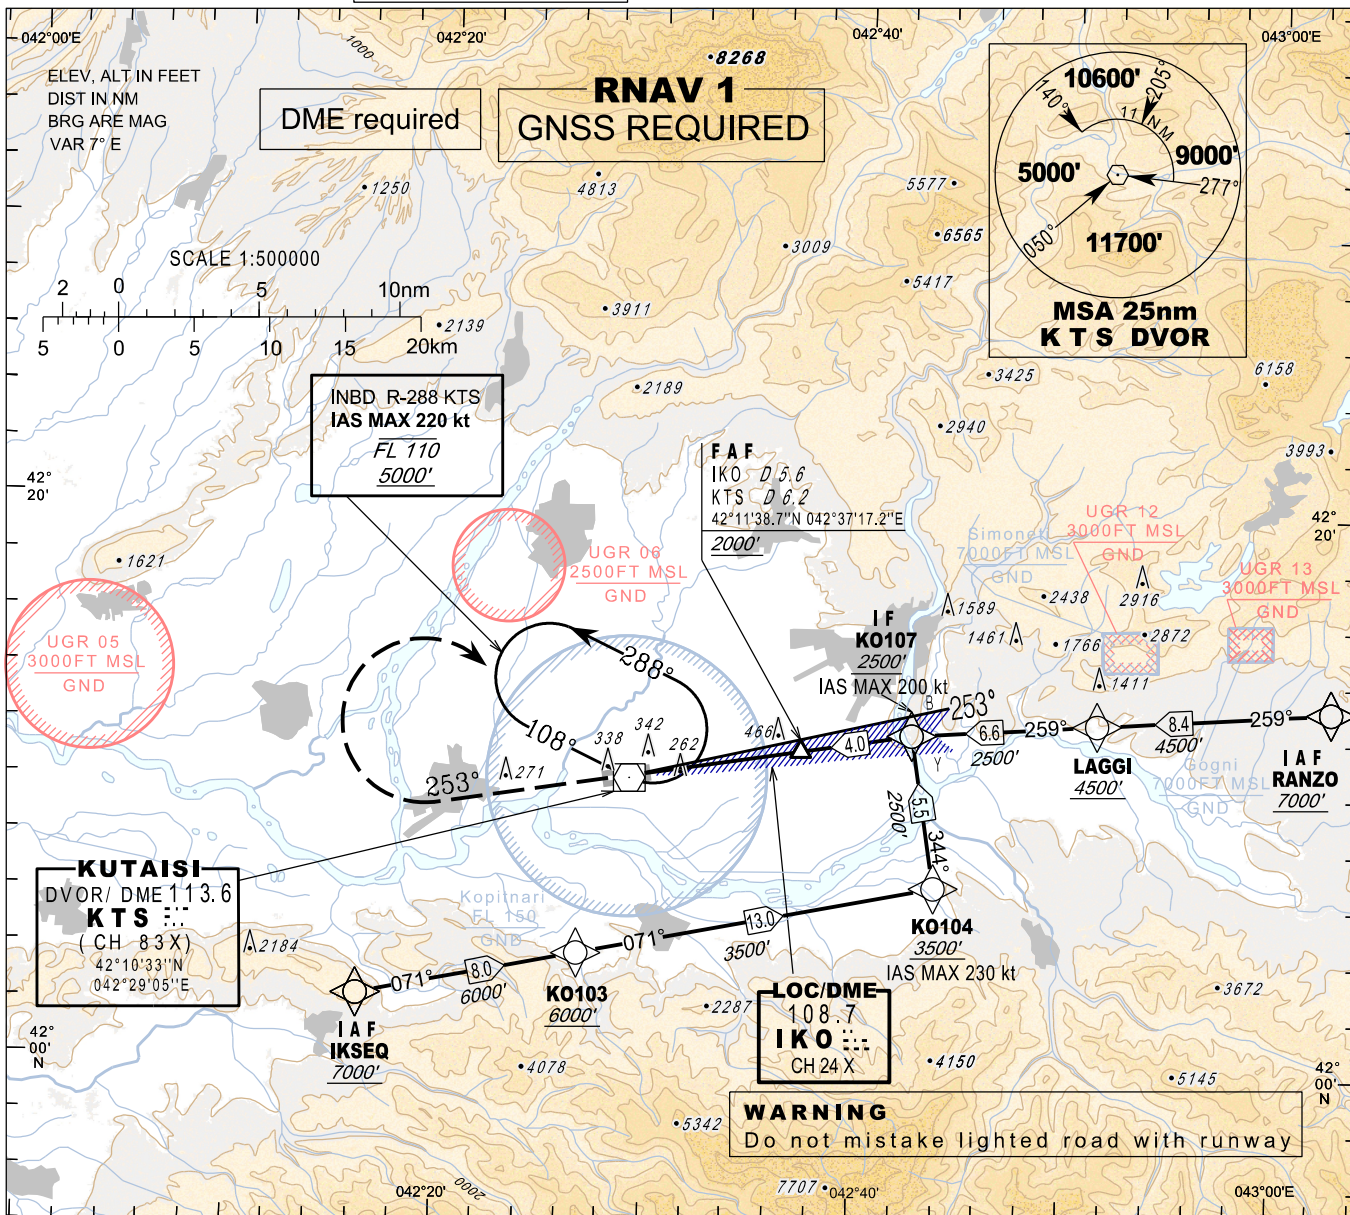


MISSED APPROACH

Normal:
Climb straight ahead to 3500', at 7 NM DME KTS (7.2 NM DME IKO)
turn right inbound **KTS** and follow **ATC** instructions.

KTS DVOR Unserviceable:
Climb straight ahead to 4500', expect vectoring.

Radio Communication Failure:
Climb straight ahead to 5000', at 7 NM DME KTS (7.2 NM DME IKO)
turn right inbound **KTS**, hold as published, when ready
make new approach (ILS_y or LOC_y or VOR).

Timing is not authorised
for defining the MAPT

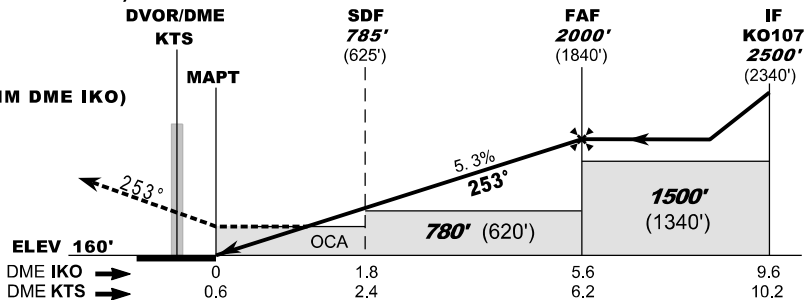

Changes: Flight procedures

Straight-in Approach	A	B	C	D
OCA(H)	510 (350)			

DME IKO NM	5	4	3	2	1
DME KTS NM	5.6	4.6	3.6	2.6	1.6
ALT (HGT) ft	1808 (1648)	1488 (1328)	1169 (1009)	849 (689)	529 (369)

PAGE INTENTIONALLY LEFT BLANK

RNAV Transition Coding Tables - RWY 25 LOCz

IKSEQ transition										
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification	
	Identifier	Flyover	Coordinates				Level	Speed kt		
IF	IKSEQ	-	42°02'37.0"N 042°16'14.0"E	-	-	-	+A7000	-	RNAV1	
TF	KO103	-	42°04'15.0"N 042°26'45.0"E	071° (078.1°)	8.0	-	+A6000	-	RNAV1	
TF	KO104	-	42°06'52.0"N 042°43'48.0"E	071° (078.2°)	13.0	-	+A3500	-230	RNAV1	
TF	KO107	-	42°12'18.0"N 042°42'36.0"E	344° (350.7°)	5.5	-	+A2500	-200	RNAV1	

RANZO transition										
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification	
	Identifier	Flyover	Coordinates				Level	Speed kt		
IF	RANZO	-	42°13'23.0"N 043°02'44.0"E	-	-	-	+A7000	-	RNAV1	
TF	LAGGI	-	42°12'47.0"N 042°51'30.0"E	259° (265.9°)	8.4	-	+A4500	-	RNAV1	
TF	KO107	-	42°12'18.0"N 042°42'36.0"E	259° (265.9°)	6.6	-	+A2500	-200	RNAV1	


PAGE INTENTIONALLY LEFT BLANK

**INSTRUMENT
APPROACH
CHART - ICAO**


AERODROME ELEV 160'
HEIGHTS RELATED TO
THR RWY 07 - ELEV 133'
TRANSITION ALT 7000'

APP 127.100
TWR 125.500

**KUTAISI/Kopitnari (UGKO)
VOR
RWY 07**

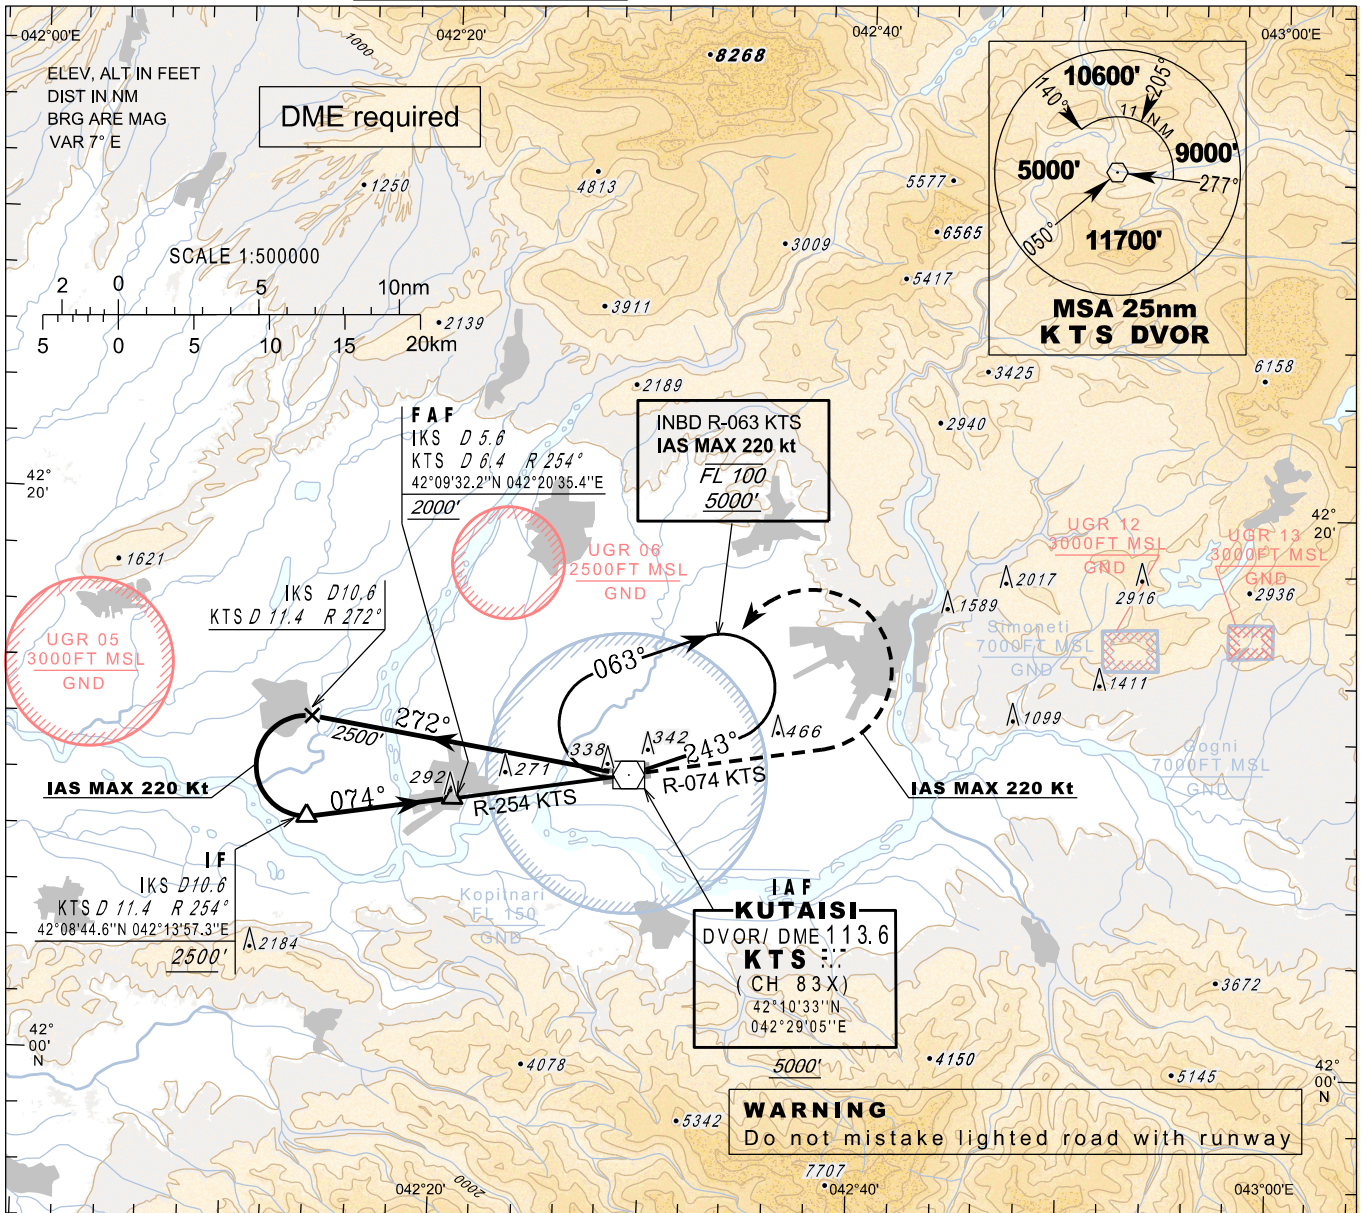

MISSED APPROACH
Normal:
Climb 3500' on R-074 KTS, at 7 NM DME KTS (7.4 NM DME IKS) turn left inbound KTS and follow ATC instructions. IAS MAX 220kt
Radio Communication Failure:
Climb 5000' on R-074 KTS, at 7 NM DME KTS (7.4 NM DME IKS) turn left inbound KTS, hold as published, when ready make new approach. IAS MAX 220kt

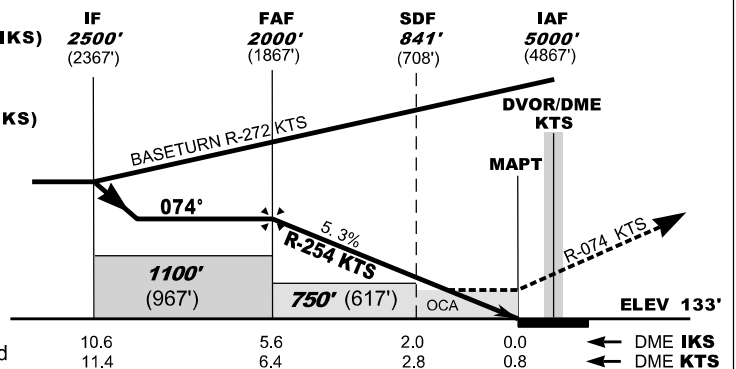

Straight-in Approach	A	B	C	D
	OCA(H) 590 (460)			

Timing is not authorised for defining the MAPT

DME KTS NM	6	5	4	3	2	1
DME IKS NM	5.2	4.2	3.2	2.2	1.2	0.2
ALT (HGT) ft	1871 (1738)	1549 (1416)	1227 (1094)	905 (772)	583 (450)	261 (128)

Changes: Flight procedures

PAGE INTENTIONALLY LEFT BLANK


**INSTRUMENT
APPROACH
CHART - ICAO**

AERODROME ELEV 160'
HEIGHTS RELATED TO
THR RWY 25 - ELEV 160'

APP 127.100
TWR 125.500

**KUTAISI/Kopitnari (UGKO)
VOR
RWY 25**

TRANSITION ALT 7000'

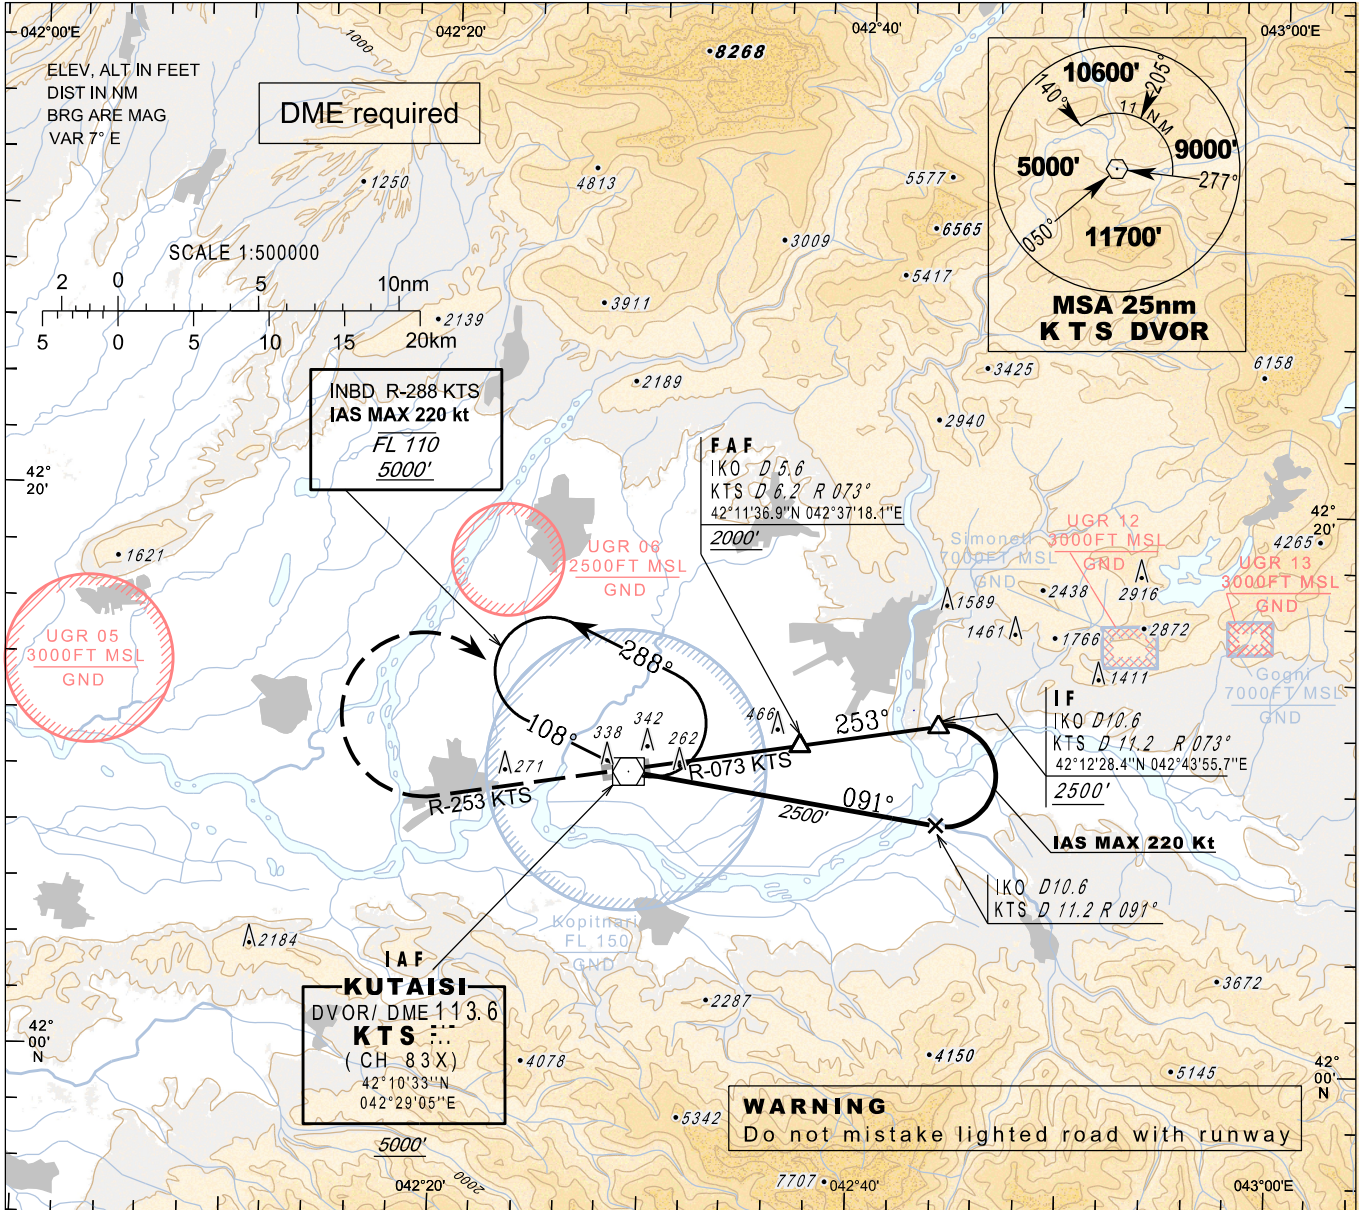


MISSED APPROACH

Normal:
Climb 3500' on R-253 KTS, at 7 NM DME KTS (7.2 NM DME IKO) turn right inbound KTS and follow ATC instructions.

Radio Communication Failure:
Climb 5000' on R-253 KTS, at 7 NM DME KTS (7.2 NM DME IKO) turn right inbound KTS, hold as published, when ready make new approach.

Timing is not authorised for defining the MAPT

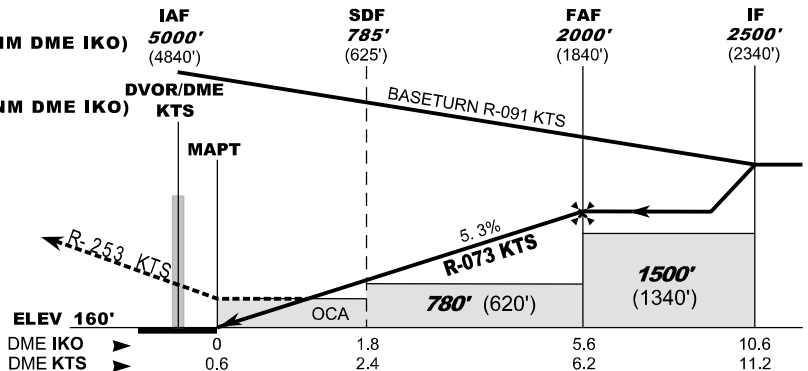

Straight-in Approach	A	B	C	D
OCA(H)	510 (350)			

DME KTS NM	6	5	4	3	2	1
DME IKO NM	5.4	4.4	3.4	2.4	1.4	0.4
ALT (HGT) ft	1936 (1776)	1617 (1457)	1297 (1137)	978 (818)	658 (498)	339 (179)

Changes: Flight procedures


PAGE INTENTIONALLY LEFT BLANK

VISUAL APPROACH CHART-ICAO

KUTAISI/Kopitnari (UGKO)

AERODROME ELEV 160'
HEIGHTS RELATED TO AD ELEV

APP 127.100
TWR 125.500

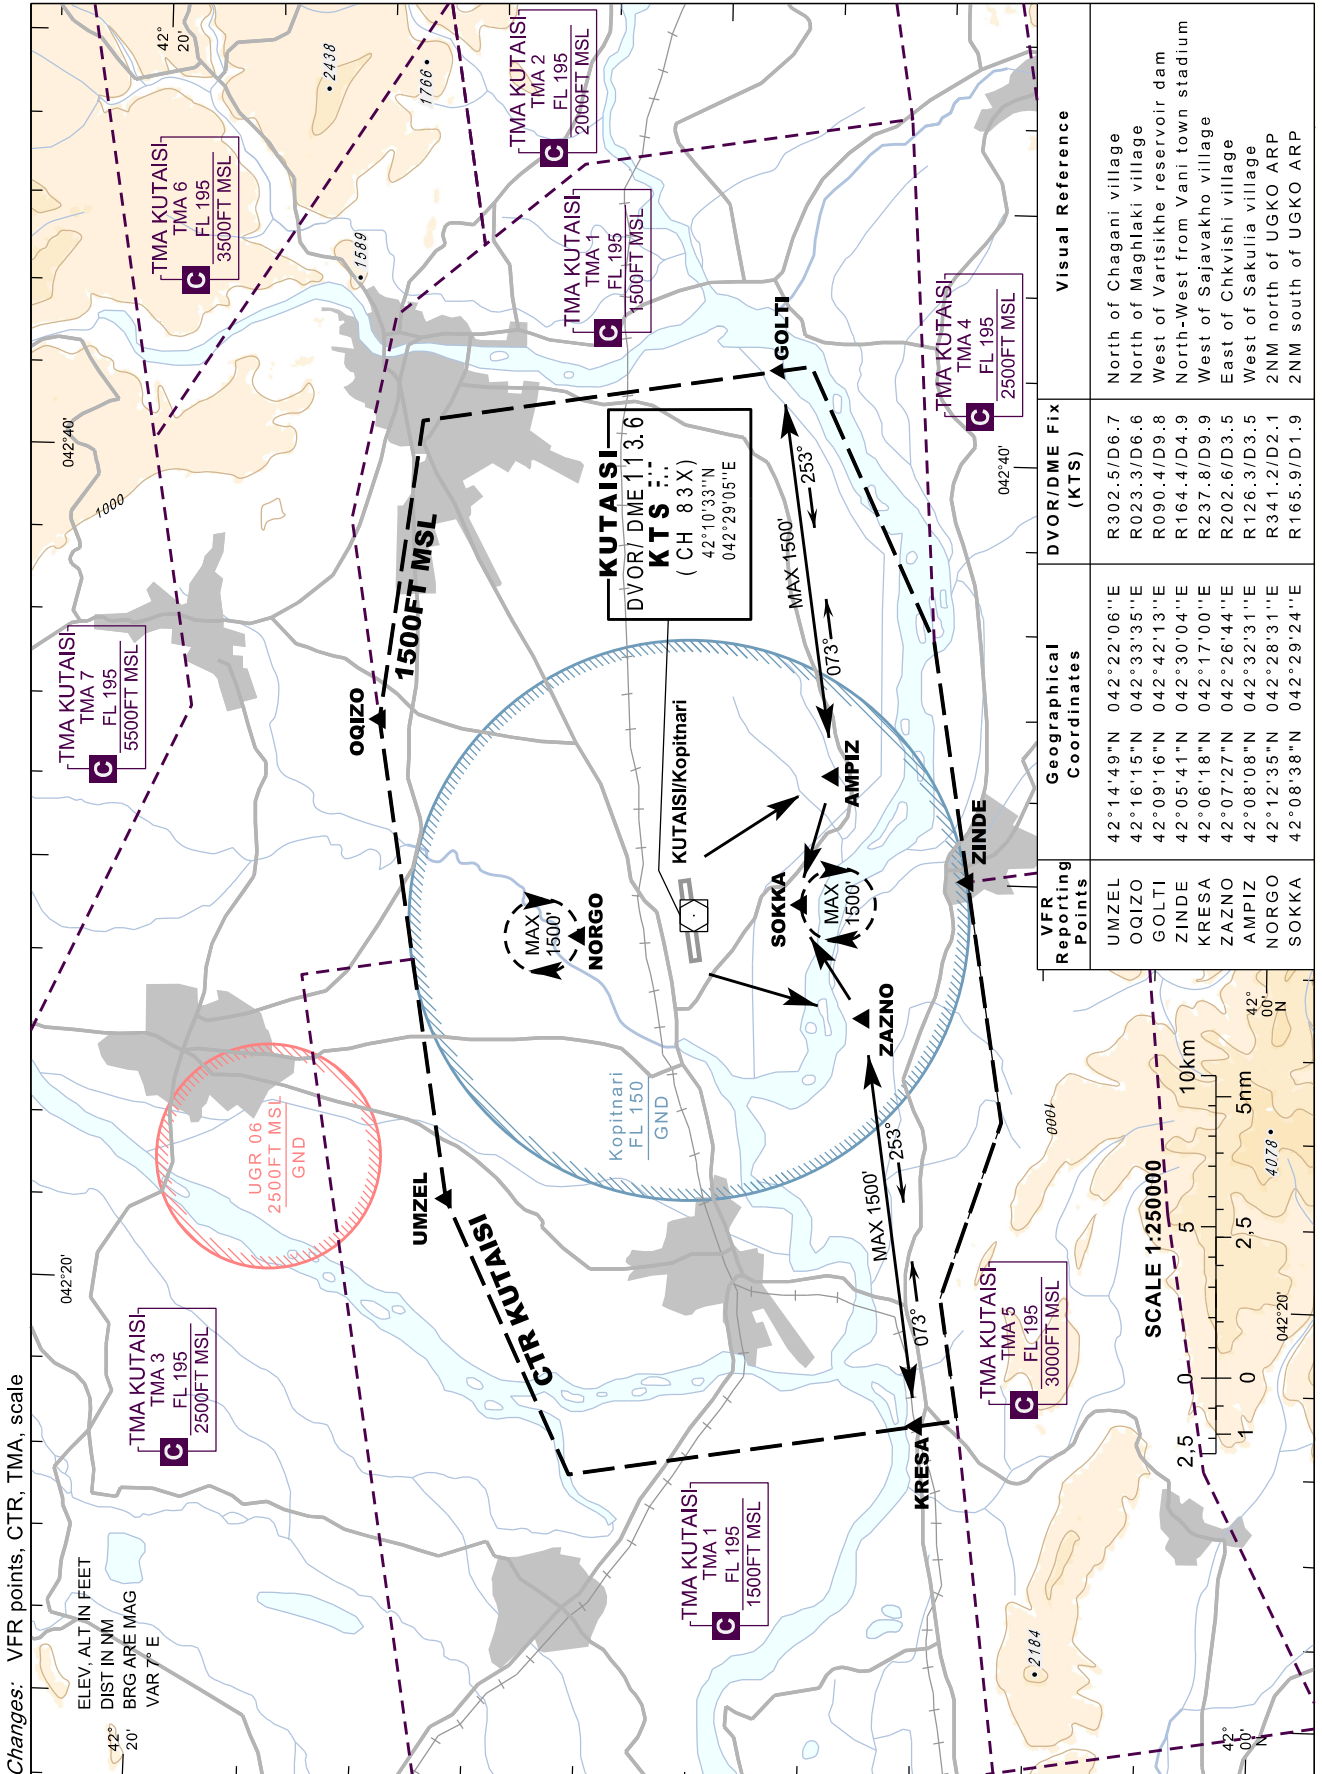


Changes: VFR points, CTR, TMA, scale

ELEV. ALT IN FEET
DIST IN NM
BRG ARE MAG
VAR 7° E

PAGE INTENTIONALLY LEFT BLANK

BIRD CONCENTRATIONS AND MOVEMENT

KUTAISI/Kopitnari (UGKO)

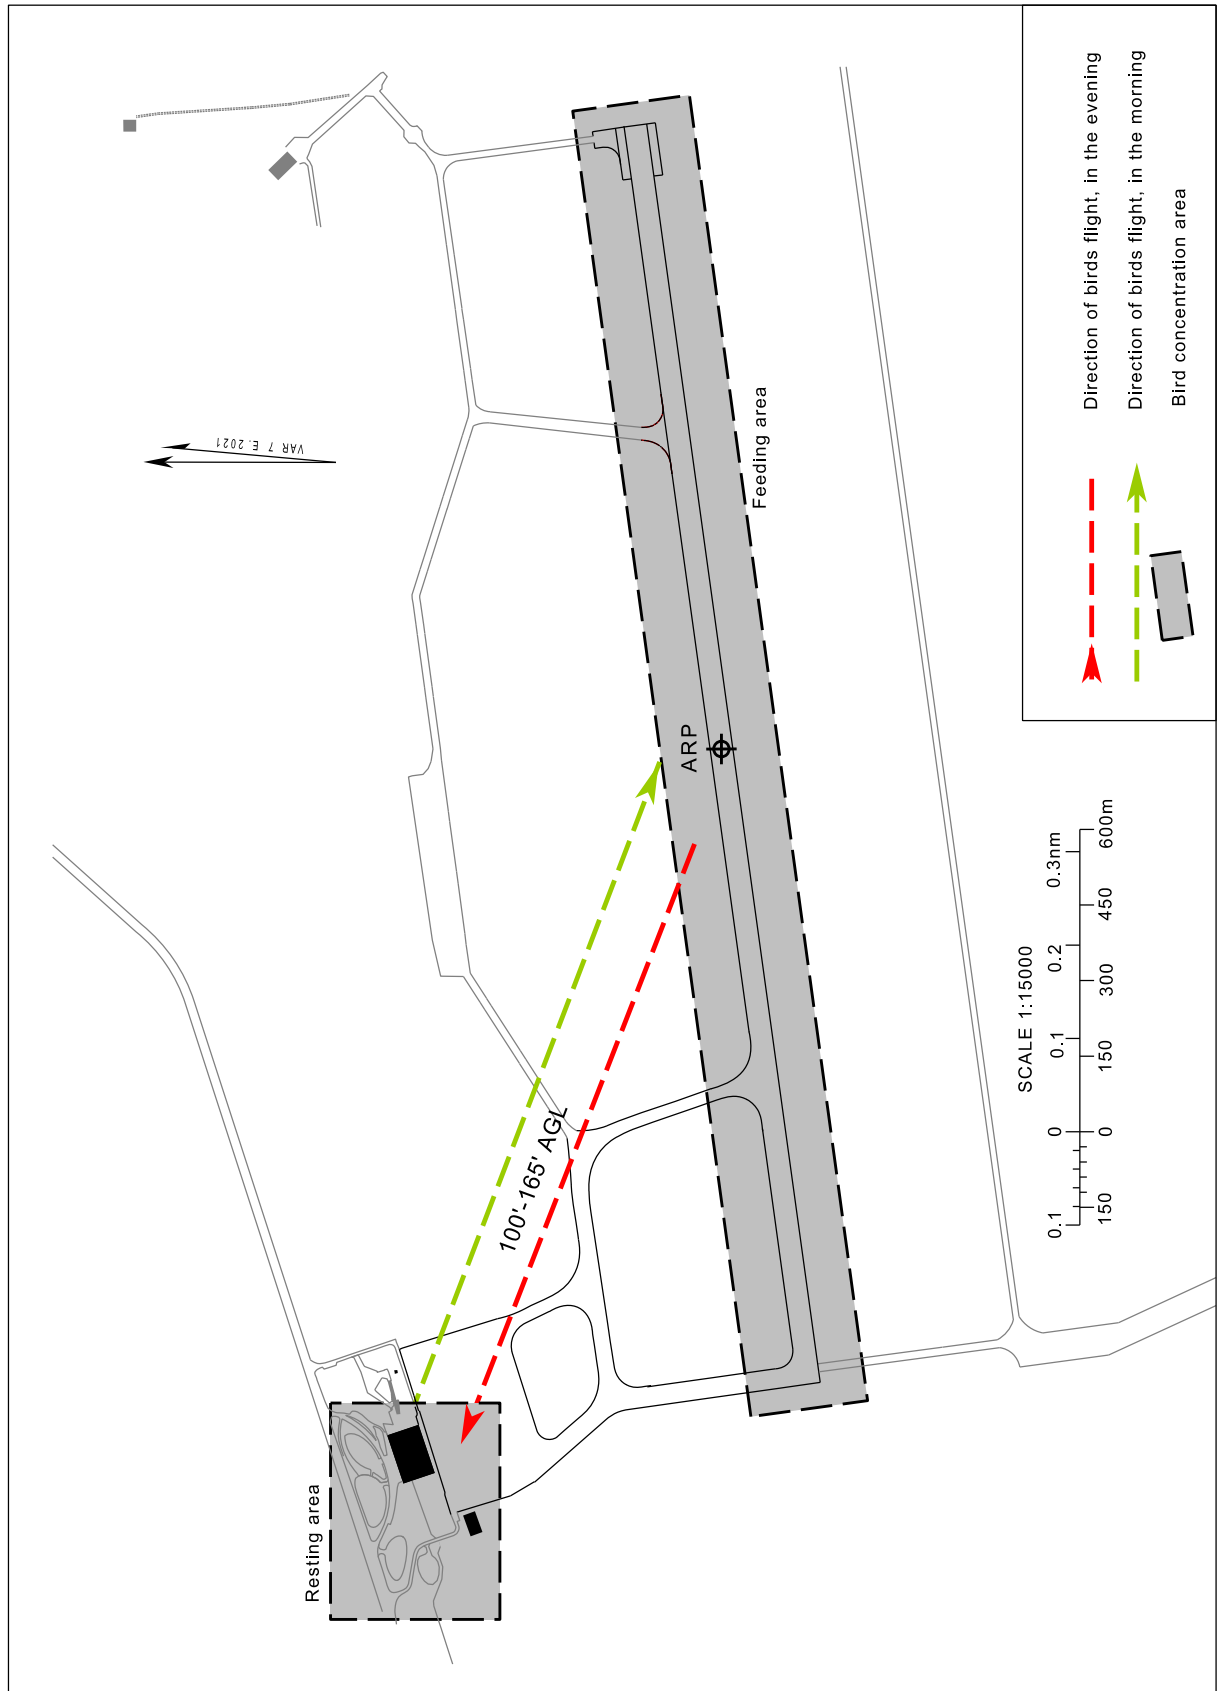

Changes: MAG VAR

PAGE INTENTIONALLY LEFT BLANK