

UGKO**UGKO AD 2.1 Aerodrome location indicator and name**

UGKO - KUTAISI/KOPITNARI

UGKO AD 2.2 Aerodrome geographical and administrative data

1	ARP coordinates and site at AD	421037N 0422858E RWY 07/25 centre line
2	Direction and distance from (city)	21 KM SW from Kutaisi centre
3	Elevation / Reference temperature	160 FT / 30°C
4	Geoid undulation at AD ELEV PSN	61 FT
5	MAG VAR / Annual change	7°E (2021) / NIL
6	Aerodrome operator	UNITED AIRPORTS OF GEORGIA LTD
	Address	UNITED AIRPORTS OF GEORGIA Airport, Isani-Samgori District 0158 TBILISI GEORGIA
	Telephone	+995322487300, +995599038930
	Telefax	NIL
	AFS	AFTN: UGKOGNXX AFTN: UGKOAPXX
	E-mail	operationccckutaisi@airports.ge, info@airports.ge, infodesk@airports.ge
	Website	NIL
7	Type of traffic permitted (IFR/VFR)	IFR/VFR
8	Remarks	Phone: +995599038930 operation H24

UGKO AD 2.3 Operational hours

1	AD Operator	MON-FRI 0530-1400
2	Customs and immigration	H24
3	Health and sanitation	H24
4	AIS Briefing Office	H24
5	ATS Reporting Office (ARO)	H24
6	MET Briefing Office	H24
7	ATS	H24
8	Fuelling	H24
9	Handling	H24
10	Security	H24
11	De-icing	H24
12	Remarks	NIL

UGKO AD 2.4 Handling services and facilities

1	Cargo-handling facilities	NIL
2	Fuel/oil types	Fuel: Jet A-1, TC-1/TS-1 (GOST 10227) Oil: NIL
3	Fuelling facilities / capacity	LLC Georgian Petroleum 3 refuelling truck: 1. Ford 11350 litres (3000 gallons), Flow Rate 1135 litres/minute; 2. Mercedes 26000 litres (5719 gallons), Flow Rate 1100 litres/minute; 3. Freightliner 21000 litres (4619 gallons), Flow Rate 1000 litres/minute Tel: (+995599)514704, (+995577)103275 Email: kutaisi@airgp.ge
4	De-icing facilities	Available - GS 800, Volvo LDM THY Aircraft Deicer
5	Hangar space for visiting aircraft	NIL
6	Repair facilities for visiting aircraft	NIL
7	Remarks	NIL

UGKO AD 2.5 Passenger facilities

1	Hotels	Available in the city
2	Restaurants	Available in the city
3	Transportation	Taxis and Shuttle Buses from the AD
4	Medical Facilities	First medical aid at AD, hospitals in the city
5	Bank and Post Office	Bank: Available Post Office: NIL
6	Tourist Office	Available
7	Remarks	NIL

UGKO AD 2.6 Rescue and fire fighting services

1	AD category for fire fighting	CAT 7
2	Rescue equipment	2 Fire trucks
3	Capability for removal of disabled aircraft	Available for Airbus A321
4	Remarks	Responsible person's details: Mob: +995595078017 Email: t.shalamberidze@airports.ge

UGKO AD 2.7 Seasonal availability - clearing

1	Types of clearing equipment	1 Snow Blower; 3 Snow Ploughs; 1 Scraper; 1 Sand Spreader
---	-----------------------------	--

2	Clearance priorities	1. RWY 07/25 and associated TWY to apron 2. Apron 3. Access roads to the airport rescue service
3	Remarks	The snow plan and friction measuring details see in section AD 1.2.2

UGKO AD 2.8 Aprons, taxiways and check locations/positions data

1	Apron designation, surface and strength of aprons	APRON: Concrete and asphalt, PCR 680/R/C/W/T
2	Taxiway designation, width, surface and strength	TWY A: 23 M, Concrete and asphalt, PCR 570/F/C/X/U TWY B: 18 M, Concrete and asphalt, PCR 570/F/C/X/U
3	Altimeter checkpoint location and elevation	Apron Elevation 137.8 FT
4	VOR checkpoints	NIL
5	INS checkpoints	INS: see Aerodrome chart UGKO-ADC
6	Remarks	NIL

UGKO AD 2.9 Surface movement guidance and control system and markings

1	Use of aircraft stand ID signs, TWY guide lines and visual docking/parking guidance system of aircraft stands	Sign board at intersection of TWY with RWY. Guide lines at apron.
2	RWY and TWY markings and LGT	RWY: Designation, THR, TDZ, centreline, edge line, RWY end marked as appropriate. Centreline, edge line, THR are lighted. TWY: Centre line, edge line marked as appropriate. Edge line is lighted.
3	Stop bars and RWY guard lights	NIL
4	Other RWY protection measures	NIL
5	Remarks	NIL

UGKO AD 2.10 Aerodrome obstacles

1 Obstacles in Area 2a

Designator	Type	Coordinates	ELEV/HGT	Markings / LGT type, colour	Remarks
1	2	3	4	5	6
UGKO2A001	Antenna	421027.6N 0422817.9E	189/- FT	LGTD / RED	07 GP
UGKO2A002	Antenna	421027.2N 0422814.7E	152/- FT	LGTD / RED	NFM 07 GP
UGKO2A003	Pole	421028.4N 0422818.2E	155/- FT	LGTD / RED	07 Windsock
UGKO2A004	Pole	421027.9N 0422819.9E	173/- FT	LGTD / RED	07 Wind Sensor

Designator	Type	Coordinates	ELEV/HGT	Markings / LGT type, colour	Remarks
1	2	3	4	5	6
UGKO2A005	Pole	421031.5N 0422858.9E	181/- FT	LGTD / RED	Middle Wind Sensor
UGKO2A006	Navaid	421032.5N 0422905.3E	175/- FT	LGTD / RED	DVOR/DME
UGKO2A007	Antenna	421033.0N 0422908.7E	174/- FT	LGTD / RED	DVOR/DME Control
UGKO2A008	Antenna	421038.1N 0422941.9E	174/- FT	LGTD / RED	NFM 25 GP
UGKO2A009	Antenna	421037.6N 0422938.0E	210/- FT	LGTD / RED	25 GP
UGKO2A010	Pole	421038.1N 0422937.4E	175/- FT	LGTD / RED	25 Windsock
UGKO2A011	Pole	421037.3N 0422935.6E	175/- FT	LGTD / RED	25 Wind Sensor

2 Obstacles in Area 2b

Designator	Type	Coordinates	ELEV/HGT	Markings / LGT type, colour	Remarks
1	2	3	4	5	6
UGKO2B001	Antenna	421044.6N 0423004.4E	163/- FT	LGTD / RED	ILS LOC 07
UGKO2B002	Antenna	421028.4N 0422750.9E	130/- FT	LGTD / RED	ILS LOC 25

3 Obstacles in Area 2c

Designator	Type	Coordinates	ELEV/HGT	Markings / LGT type, colour	Remarks
1	2	3	4	5	6
UGKO2C001	Building	421040.6N 0422815.7E	172/- FT	NIL	Meteo Building
UGKO2C002	Antenna	421040.8N 0422816.8E	193/- FT	NIL	Meteo 1
UGKO2C003	Antenna	421041.6N 0422815.9E	193/- FT	NIL	Meteo 2
UGKO2C004	Antenna	421040.6N 0422815.2E	197/- FT	NIL	Meteo 3
UGKO2C005	Antenna	421046.6N 0422819.5E	181/- FT	NIL	Fire Fighting Depo
UGKO2C012	Building	421053.6N 0422752.1E	196/- FT	NIL	Terminal
UGKO2C013	Control tower	421056.3N 0422803.3E	333/- FT	LGTD / RED	ATC Building
UGKO2C014	Antenna	421051.9N 0422751.1E	205/- FT	NIL	Ops Building
UGKO2C015	Pole	421051.7N 0422736.3E	225/- FT	NIL	Light Mast
UGKO2C016	Pole	421052.1N 0422752.2E	247/- FT	NIL	Light Mast 1
UGKO2C017	Pole	421052.5N 0422753.8E	248/- FT	NIL	Light Mast 2
UGKO2C018	Pole	421053.1N 0422756.1E	248/- FT	NIL	Light Mast 3
UGKO2C019	Pole	421053.6N 0422757.8E	248/- FT	NIL	Light Mast 4
UGKO2C020	Pole	421054.1N 0422800.0E	248/- FT	NIL	Light Mast 5

Designator	Type	Coordinates	ELEV/HGT	Markings / LGT type, colour	Remarks
1	2	3	4	5	6
UGKO2C021	Pole	421049.9N 0422758.8E	246/- FT	NIL	Light Mast 6
UGKO2C022	Pole	421046.3N 0422800.4E	245/- FT	NIL	Light Mast 7
UGKO2C023	Pole	421047.5N 0422805.5E	248/- FT	NIL	Light Mast 8
UGKO2C024	Pole	421054.6N 0422801.7E	249/- FT	NIL	Light Mast 9
UGKO2C025	Pole	421055.1N 0422803.6E	249/- FT	NIL	Light Mast 10
UGKO2C026	Pole	421055.5N 0422805.3E	249/- FT	NIL	Light Mast 11
UGKO2C027	Pole	421051.1N 0422803.9E	249/- FT	NIL	Light Mast 12

4 Obstacles in Area 3

Designator	Type	Coordinates	ELEV/HGT	Markings / LGT type, colour	Remarks
1	2	3	4	5	6
UGKO3001	General utility	421032.7N 0422816.9E	139.0/- FT	NIL	PAPI 07
UGKO3002	Sign	421047.5N 0422753.6E	137.0/- FT	NIL	Apron Sign on Apron
UGKO3003	Sign	421039.8N 0422800.9E	137.0/- FT	NIL	TWY "A" Sign on TWY
UGKO3004	Sign	421033.7N 0422802.3E	137.0/- FT	NIL	TWY "A" Holding Position Sign 1
UGKO3005	Sign	421034.0N 0422805.0E	137.0/- FT	NIL	TWY "A" Holding Position Sign 2
UGKO3006	Sign	421032.1N 0422808.8E	137.0/- FT	NIL	TWY "A" Sign on RWY
UGKO3007	General utility	421040.3N 0422937.3E	160.0/- FT	NIL	PAPI 25
UGKO3008	Sign	421034.9N 0422834.6E	143.0/- FT	NIL	TWY "B" Sign 1 on RWY
UGKO3009	Sign	421033.7N 0422825.2E	141.0/- FT	NIL	TWY "B" Sign 2 on RWY
UGKO3010	Sign	421035.6N 0422827.6E	142.0/- FT	NIL	TWY "B" Holding Position Sign 1
UGKO3011	Sign	421036.3N 0422830.0E	142.0/- FT	NIL	TWY "B" Holding Position Sign 2
UGKO3012	Sign	421040.1N 0422825.3E	142.0/- FT	NIL	TWY "B" Sign 1 on TWY
UGKO3013	Sign	421045.5N 0422816.4E	142.0/- FT	NIL	TWY "B" Sign 2 on TWY
UGKO3014	Sign	421043.6N 0422815.9E	142.0/- FT	NIL	TWY "B" Sign 3 on TWY
UGKO3015	Sign	421047.0N 0422811.1E	142.0/- FT	NIL	TWY "B" Sign 4 on TWY
UGKO3016	Sign	421047.0N 0422808.3E	142.0/- FT	NIL	Apron Sign 1 on TWY "B"
UGKO3017	Sign	421049.8N 0422809.2E	142.0/- FT	NIL	Apron Sign 2 on TWY "B"

UGKO AD 2.11 Meteorological information provided

1	Associated MET Office	KUTAISI
2	Hours of service	H24
	MET Office outside hours	-
3	Office responsible for TAF preparation	KUTAISI
	Periods of validity	24 HR
4	Trend forecast	TREND
	Interval of issuance	0.5 HR
5	Briefing/consultation provided	Personal consultation and telephone consultation
6	Flight documentation	Charts, tabular form, abbreviated plain language text
	Language(s) used	English
7	Charts and other information available for briefing or consultation	S, U85, U70, U50, U30, U20, P85, P70, P50, P40, P30, P20, SWH, SWM, T
8	Supplementary equipment available for providing information	NIL
9	ATS units provided with information	Kutaisi TWR, APP; Tbilisi ACC
10	Additional information (limitation of service, etc.)	NIL

UGKO AD 2.12 Runway physical characteristics

RWY Designations	TRUE BRG	Dimensions of RWY (M)	Strength (PCR) and surface of RWY and SWY	THR coordinates, RWY end coordinates, THR geoid undulation	THR elevation and highest elevation of TDZ of precision APP RWY
1	2	3	4	5	6
07	080.45°	2500 x 45	570/F/C/X/U Concrete and asphalt	THR: 421029.85N 0422804.04E END: 421043.27N 0422951.43E GUND: 61.4 FT	THR: 133.4 FT TDZ: 142.8 FT
25	260.45°			THR: 421043.27N 0422951.43E END: 421029.85N 0422804.04E GUND: 61.4 FT	THR: 160.3 FT TDZ: NIL

RWY Designations	Slope of RWY - SWY	SWY dimensions (M)	CWY dimensions (M)	Strip dimensions (M)	RESA dimensions (M)
1	7	8	9	10	11
07	0.30%	60 x 45	250 x 150	2740 x 280	200 x 150
25	-0.30%	60 x 45	250 x 150		240 x 150

RWY Designations	Location and Description of Arresting System	OFZ	Remarks
1	12	13	14
07	NIL	Yes	NIL
25	NIL	Yes	NIL

UGKO AD 2.13 Declared distances

RWY Designator	TORA (M)	TODA (M)	ASDA (M)	LDA (M)	Remarks
1	2	3	4	5	6
07	2500	2750	2560	2500	NIL
25	2500	2750	2560	2500	NIL

UGKO AD 2.14 Approach and runway lighting

RWY Designator	APCH LGT type, LEN, INTST	THR LGT, colour, WBAR	VASIS (MEHT) PAPI	TDZ LGT LEN	RWY Centre Line LGT Length, spacing, colour, INTST
1	2	3	4	5	6
07	HIALS 900 M LIH	GREEN	PAPI Left/3.0° (52 FT)	NIL	NIL
25	HIALS 900 M LIH	GREEN	PAPI Left/3.0° (51 FT)	NIL	NIL

RWY Designator	RWY edge LGT LEN, spacing, colour, INTST	RWY End LGT colour, WBAR	SWY LGT LEN, colour	Remarks
1	7	8	9	10
07	2500 M 60 M White FM 1900 M Yellow LIH	RED	NIL	NIL
25	2500 M 60 M White FM 1900 M Yellow LIH	RED	NIL	NIL

UGKO AD 2.15 Other lighting and secondary power supply

1	ABN/IBN location, characteristics and hours of operation	ABN: At Tower building, rotating light beacon, RPM 12, code W/G, SS-SR IBN: NIL
2	LDI location and LGT Anemometer location and LGT	NIL NIL
3	TWY edge and centre line lighting	CL: NIL Edge: All TWY
4	Secondary power supply/switch-over time	Secondary power supply to all lighting at AD. Switch-over time: 1 SEC
5	Remarks	NIL

UGKO AD 2.16 Helicopter landing area

1	Coordinates TLOF or THR of FATO Geoid undulation	NIL
2	TLOF and/or FATO elevation M/FT	NIL
3	TLOF and FATO area dimensions, surface, strength, marking	NIL
4	True BRG of FATO	NIL
5	Declared distance available	NIL
6	APP and FATO lighting	NIL
7	Remarks	NIL

UGKO AD 2.17 Air traffic services airspace

1	Designation and lateral limits	KUTAISI CTR 421449N 0422206E - 421532N 0422751E - 421615N 0423335E - 421538N 0424048E - 420843N 0424220E - 420623N 0423548E - 420457N 0422420E - 420557N 0422005E - 420534N 0421710E - 421228N 0421535E - 421449N 0422206E
2	Vertical limits	GND to 1500 FT AMSL
3	Airspace classification	C
4	ATS unit call sign Language(s)	KUTAISI TOWER EN
5	Transition altitude	7000 FT AMSL
6	Hours of applicability	H24
7	Remarks	NIL

UGKO AD 2.18 Air traffic services communication facilities

Service designation	Call sign	Channel(s)	SATVOICE number(s)	Logon address	Hours of operation	Remarks
1	2	3	4	5	6	7
APP	KUTAISI APPROACH	127.100 MHz	NIL	NIL	H24	NIL
		121.500 MHz	NIL	NIL		Emergency
TWR	KUTAISI TOWER	125.500 MHz	NIL	NIL	H24	NIL

UGKO AD 2.19 Radio navigation and landing aids

Type of aids, MAG VAR, Type of supported OPS for ILS/MLS/ GLS, basic GNSS and SBAS, Classification for ILS, Facility Classifica- tion and approach facility designation(s) for GBAS, VOR/ILS/MLS station declination	ID	Frequency, Channel number, Service provider	Hours of operation	Position of transmitting antenna coordinates	ELEV of DME transmitting antenna, GBAS reference point ELEV and ellipsoid HGT, SBAS LTP/FTP ellipsoid HGT	Service volume radius from the GBAS reference point	Remarks
1	2	3	4	5	6	7	8
DVOR/DME (7°E 2021)	KTS	113.600 MHZ CH 83X	H24	421032.6N 0422905.3E	200 FT	NIL	Coverage 108 NM.
ILS RWY 07 CAT I (7°E 2021) CLASS I/NIL/NIL							
LOC 07	IKS	110.100 MHZ	H24	421044.9N 0423004.4E	Not applicable	NIL	NIL
GP 07	—	334.400 MHZ	H24	421027.6N 0422817.8E	Not applicable	NIL	NIL
DME 07	IKS	CH 38X	H24	421027.6N 0422817.8E	200 FT	NIL	Coverage 25 NM. Omnidirectional.
ILS RWY 25 CAT I (7°E 2021) CLASS I/NIL/NIL							
LOC 25	IKO	108.700 MHZ	H24	421028.2N 0422751.1E	Not applicable	NIL	NIL
GP 25	—	330.500 MHZ	H24	421037.6N 0422938.0E	Not applicable	NIL	NIL
DME 25	IKO	CH 24X	H24	421037.6N 0422938.0E	200 FT	NIL	Coverage 25 NM. Omnidirectional.

UGKO AD 2.20 Local aerodrome regulations

1 Airport regulations

To be developed.

2 Taxiing to and from stands

For all type of aircraft is prohibited to use minimum turn radius on RWY, TWY and apron.

On RWY 07/25 180 degree turn for aircraft with MTOW 35 tones and over on turn pad only.

A stand number of arriving aircraft will be allocated by the TWR. Assistance from the "FOLLOW ME" vehicle should be requested via the TWR.

Assistance from the "FOLLOW ME" vehicle should be available:

- when visibility is less than 400 M;
- while taxiing from RWY 07/25 to aircraft stand if wind speed is more than 29 KT (15 M/SEC);
- by pilot request.

Departing IFR and VFR flights shall contact TWR to obtain ATC clearance before commencing taxiing. Request for ATC clearance may take place at earliest 10 minutes prior to engine start-up.

Engine start-up and taxiing shall be carried out by the pilot-in-command only after receiving clearance from the appropriate ATC unit. Taxiing on the aerodrome maneuvering area shall be conducted in accordance with taxi procedures or as directed by the ATC unit. The pilot-in-command is responsible for meeting the norms established for taxiing with this type of aircraft.

While taxiing, the pilot-in-command shall be observing the area in front of him and take measures to avoid collisions with aircraft, motor vehicles and other obstacles. The pilot-in-command may not enter runway without clearance from the appropriate tower controller.

Taxiing from the holding position to the line-up and take-off shall be performed only after obtaining clearance from the tower controller.

The pilot-in-command shall take off within one minute after receiving the clearance from the ATC unit. If a take-off has not been carried out within the above mentioned time interval, the pilot-in-command shall request a new clearance.

Isolated aircraft stand with the coordinates 421043.683N 0422809.593E is available near the TWY B.

For those airplanes whose reference field length is 1500 m or over, during poor runway braking action being reported, because of insufficient longitudinal coefficient of friction, landing or take-off is forbidden if crosswind component exceeds 24 KM/HR (13 KT).

3 Parking area for small aircraft (General aviation)

General aviation aircraft shall be directed by marshallers to the parking.

4 Parking area for helicopters

Helicopters shall always be directed to the stand by a marshaller.

5 Apron – taxiing during winter conditions

Generally, apron, TWY, and RWY are not snow-covered during winter.

6 Taxiing – limitations

Taxiing speed limit on TWY A and TWY B is 25 KM/HR.

The washing area for aircraft is located on the aircraft parking stands 8 and 9.

7 School and training flights – technical test flights – use of runway

Educational and training flights can be made only after clearance from the TWR.

8 Helicopter traffic – limitation

Take-off and landing for all types of civil helicopters shall be carried out from/to RWY 07/25 only.

9 Removal of disabled aircraft from runway

When an aircraft is wrecked on a runway, it is the duty of the owner or user of such aircraft to have it removed as soon as possible. If a wrecked aircraft is not removed from the runway as quickly as possible by the owner or user, the aircraft will be removed by the aerodrome authority at the owner's or user's expense.

UGKO AD 2.21 Noise abatement procedures

Not applicable.

UGKO AD 2.22 Flight procedures

1 Procedures for IFR flights within Kutaisi TMA

1.1 General

ATS surveillance service within Kutaisi TMA is provided by Kutaisi approach unit (call sign "Kutaisi approach") on frequency 127.1 MHZ.

Horizontal separation minimum applicable within Kutaisi TMA is 5 NM.

ATIS is not available. All pertinent information is provided by ATC.

1.2 Procedures for arrival flights

Arrival flight capable of RNAV1 (GNSS) will normally be cleared to follow appropriate RNAV STAR or will be given direct routings to the waypoints designated as initial approach fix of the ILS z (or LOC z) instrument approach procedures. Loss of RNAV1 (GNSS) capability shall be immediately reported to ATC.

Arrival flights not capable of RNAV1 (GNSS) will normally be vectored for ILS approach. Alternatively, direct routing to KTS (IAF) may be given followed by ILS y (or LOC y or VOR) instrument approach procedures. If a flight not capable of RNAV1 (GNSS) receives clearance to follow RNAV STAR or to proceed direct to a waypoint associated with ILS z (or LOC z) instrument approach procedures, the clearance shall be rejected and the reason stated: "UNABLE RNAV 1 (GNSS)".

Note: When vectored for ILS approach for RWY 07 expect glide path interception not below 3500 FT and for RWY 25 – not below 4500 FT (see also AD 2.UGKO-ATCSMAC chart).

Published speed restrictions on STARs and instrument approach procedures shall always be complied with. Controllers are not allowed to cancel published speed restrictions.

1.3 Procedures for departing flights

Departing flights capable of RNAV1 (GNSS) will normally be cleared to follow appropriate RNAV SID. Loss of RNAV1 (GNSS) capability shall be reported to ATC as soon as possible.

Departing flights not capable of RNAV1 (GNSS) will be cleared to follow appropriate conventional SID available for RWY 07 or will be instructed to "CONTINUE RUNWAY HEADING" (or "CLIMB STRAIGHT AHEAD") for RWY 25. If a flight not capable of RNAV1 (GNSS) receives clearance to follow RNAV SID, the clearance shall be rejected and the reason stated: "UNABLE RNAV 1 (GNSS)".

When cleared level requires an ACFT to level-off on SID, ATC Surveillance Minimum Altitudes will be respected by controller.

As an alternative to any SID of RWY 25, controller may instruct to "CONTINUE RUNWAY HEADING" or "CLIMB STRAIGHT AHEAD". In such cases standard climb gradient of 3.3% or greater shall be maintained. Such instructions are not utilized for RWY 07.

Visual departures are not implemented.

1.4 FPL route options for arrivals and departures

Arrivals to UGKO:

STAR First Point	Available Routings	Remarks
BASKA *	...GUSLI DCT BASKA	-
EMBUS *	...LURIS DCT EMBUS	FRA (I) points may also be used between LURIS and EMBUS
	...KUFAN DCT EMBUS	FRA (I) points may also be used between KUFAN and EMBUS
	...ADEKI DCT EMBUS	FRA (I) points may also be used between ADEKI and EMBUS
	...TISOT DCT BT DCT EMBUS	-
	...OGEVI DCT BT DCT EMBUS	-
	...H7 EMBUS	Only available for departures from local airports
MAQQO *	...ROLIN DCT MAQQO	-
	...IDLER DCT MAQQO	-
	...BANUT DCT MAQQO	-
TUZZA *	...SARPI DCT TUZZA	-
	[SID] TUZZA	SID from UGSB to TUZZA
Direct ARR Point	Available Routings	Remarks
KTS *	...H5 KTS	Only available for departures from local airports
	...H7 KTS	

* G, M and X types of flight are not restricted by the routing options described in the table.

Note: Cleared levels assigned by ATC during descent on DCT segments will be based on relevant ATC Surveillance Minimum Altitude Charts.

Departures from UGKO:

SID Last Point	Available Routings	Remarks
KADZE *	KADZE DCT BANUT...	-

KUSSA	KUSSA DCT IZERO...	-
	KUSSA DCT ROLIN...	Only available from the last Sunday of OCT until the last Sunday of MAR
	KUSSA DCT SARPI...	Only available for arrivals to LTFO
	KUSSA H5...	Only available for arrivals to local airports
	KUSSA [STAR]	STAR from KUSSA to UGSB
VIZRO *	VIZRO DCT LAPTO...	FRA (I) points may also be used between VIZRO and LAPTO
	VIZRO DCT LURIS...	FRA (I) points may also be used between VIZRO and LURIS
	VIZRO DCT KUFAN...	FRA (I) points may also be used between VIZRO and KUFAN
	VIZRO DCT DISKA...	-
	VIZRO DCT TAVRO...	-
	VIZRO DCT OGEVI...	-
	VIZRO DCT GIMUR...	-
	VIZRO H5...	-
Direct DEP Point	Available Routings	Remarks
KTS	KTS...	Only available for arrivals to UGKO
* G, M and X types of flight are not restricted by the routing options described in the table.		

2 Procedures for VFR flights within Kutaisi TMA

Two-way radio communication shall be maintained with Kutaisi Approach on the FRQ 127.100 MHZ.

Transfer of VFR flights between Kutaisi APP and Kutaisi TWR is conducted over established entry/exit points of CTR as shown in the Visual Approach Chart AD2.UGKO-VAC unless otherwise instructed by APP or TWR unit.

3 Procedures for VFR flights within Kutaisi CTR

Aircraft shall establish two-way radio communication with Kutaisi tower before conducting flights in Kutaisi CTR.

VFR flights intending to enter Kutaisi CTR from uncontrolled airspace shall establish communication with Kutaisi tower at least 5 minutes before entry to obtain clearance.

VFR flights within Kutaisi CTR shall be conducted at or below 1500 FT AMSL unless otherwise cleared by the TWR unit.

VFR flights shall be conducted with visual reference to the ground.

VFR flights shall enter/exit Kutaisi CTR via the entry/exit points shown on the Visual Approach Chart AD 2.UGKO-VAC, unless otherwise instructed by APP or TWR unit.

To facilitate separation of VFR and IFR flights within the CTR, TWR controller may instruct a VFR flight to follow the following routes (taking into account the planned entry/exit point of a VFR flight):

For arriving VFR flights:

- UMZEL – NORGO, followed by holding at NORGO if required;
- OQIZO – NORGO, followed by holding at NORGO if required;
- GOLTİ – AMPIZ – SOKKA, followed by holding at SOKKA if required;
- KRESA – ZAZNO – SOKKA, followed by holding at SOKKA if required.

For departing VFR flights:

- After departure to ZAZNO then KRESA;
- After departure to AMPIZ then GOLTİ.

Note: No intermediate points will be required when leaving CTR via UMZEL or OQIZO or ZINDE.

For VFR flights crossing CTR:

- GOLTİ – KRESA, or
- KRESA – GOLTİ.

All VFR reporting points of Kutaisi CTR are described in the following table:

Name	Geographical coordinates	DVOR/DME Fix (KTS)	Visual reference
UMZEL	421449N 0422206E	R302.5/D6.7	North of Chagani village
OQIZO	421615N 0423335E	R023.3/D6.6	North of Maghlaki village
GOLTİ	420916N 0424213E	R090.4/D9.8	West of Vartsikhe reservoir dam
ZINDE	420541N 0423004	R164.4/D4.9	North-West from Vani town stadium
KRESA	420618N 0421700E	R237.8/D9.9	West of Sajavakho village

Name	Geographical coordinates	DVOR/DME Fix (KTS)	Visual reference
ZAZNO	420727N 0422644E	R202.6/D3.5	East of Chkvishi village
AMPIZ	420808N 0423231E	R126.3/D3.5	West of Sakulia village
NORGO	421235N 0422831E	R341.2/D2.1	2NM north of UGKO ARP
SOKKA	420838N 0422924E	R165.9/D1.9	2NM south of UGKO ARP

See also the Visual Approach Chart AD 2.UGKO-VAC.

UGKO AD 2.23 Additional information

Intense activity of swallow flocks takes place daily from 08:00 to 11:00 (local time) (during summer season from June to September) when birds fly from resting area (Airport Buildings) across the approach of RWY 07 to their feeding area, Aerodrome. Only small swallows are active, which doesn't effect flight safety if strikes to aircraft. Their flight height varies from 100 FT (30 M) to 165 FT (50 M) AGL. From 16:00 to 19:00 (local time) the same activity as described above takes place in reverse when the birds return to their resting area.

During the above periods pilots of aircraft are advised, where the design limitations of aircraft installations permit, to operate landing lights in flight, during take-off, approach-to-land and climb and descent procedures. Dispersal activities include occasional playing back of distressed calls from high fidelity weather-resistant speakers, high shooting sound produced of liquid gas cannons and the visual repellents (hunter dummies) allocated near the RWY 07/25.

Also modifications of the airport environment are under way to reduce, if not eliminate, the wildlife hazard. No landfills in the vicinity and no open waste-bins on the aerodrome. Ground and grass cover is treated properly.

UGKO AD 2.24 Charts related to an aerodrome

Chart Name	Page
Aerodrome Chart - ICAO	AD 2.UGKO-ADC
Area Chart - ICAO	AD 2.UGKO-ARC
Standard Departure Chart - Instrument - ICAO RWY 07	AD 2.UGKO-SID-07-1
Standard Departure Routes - Instrument RWY 07	AD 2.UGKO-SID-07-3
Standard Departure Chart - Instrument - ICAO - RNAV RWY 07	AD 2.UGKO-SID-RNAV-07-1
Standard Departure Routes - Instrument - RNAV RWY 07	AD 2.UGKO-SID-RNAV-07-3
Standard Departure Chart - Instrument - ICAO - RNAV RWY 25	AD 2.UGKO-SID-RNAV-25-1
Standard Departure Routes - Instrument - RNAV RWY 25	AD 2.UGKO-SID-RNAV-25-3
Standard Arrival Chart - Instrument - ICAO - RNAV RWY 07	AD 2.UGKO-STAR-RNAV-07-1
Standard Arrival Routes - Instrument - RNAV RWY 07	AD 2.UGKO-STAR-RNAV-07-3
Standard Arrival Chart - Instrument - ICAO - RNAV RWY 25	AD 2.UGKO-STAR-RNAV-25-1
Standard Arrival Routes - Instrument - RNAV RWY 25	AD 2.UGKO-STAR-RNAV-25-3
ATC Surveillance Minimum Altitude Chart - ICAO	AD 2.UGKO-ATCSMAC-1
ATC Surveillance Minimum Altitude Sector's Coordinates	AD 2.UGKO-ATCSMAC-3
Instrument Approach Chart - ICAO RWY 07 (ILSy)	AD 2.UGKO-IAC-07-ILSy
* the chart contains a text page	

Chart Name	Page
Instrument Approach Chart - ICAO RWY 07 (ILS _z)	AD 2.UGKO-IAC-07-ILS _z -1
Instrument Approach Coding RWY 07 (ILS _z)	AD 2.UGKO-IAC-07-ILS _z -3
Instrument Approach Chart - ICAO RWY 07 (LOC _y)	AD 2.UGKO-IAC-07-LOC _y
Instrument Approach Chart - ICAO RWY 07 (LOC _z)	AD 2.UGKO-IAC-07-LOC _z -1
Instrument Approach Coding RWY 07 (LOC _z)	AD 2.UGKO-IAC-07-LOC _z -3
Instrument Approach Chart - ICAO RWY 25 (ILS _y)	AD 2.UGKO-IAC-25-ILS _y
Instrument Approach Chart - ICAO RWY 25 (ILS _z)	AD 2.UGKO-IAC-25-ILS _z -1
Instrument Approach Coding RWY 25 (ILS _z)	AD 2.UGKO-IAC-25-ILS _z -3
Instrument Approach Chart - ICAO RWY 25 (LOC _y)	AD 2.UGKO-IAC-25-LOC _y
Instrument Approach Chart - ICAO RWY 25 (LOC _z)	AD 2.UGKO-IAC-25-LOC _z -1
Instrument Approach Coding RWY 25 (LOC _z)	AD 2.UGKO-IAC-25-LOC _z -3
Instrument Approach Chart - ICAO RWY 07 (VOR)	AD 2.UGKO-IAC-07-VOR
Instrument Approach Chart - ICAO RWY 25 (VOR)	AD 2.UGKO-IAC-25-VOR
Visual Approach Chart - ICAO	AD 2.UGKO-VAC
Bird Concentrations and Movement - Index chart	AD 2.UGKO-BIRD
* the chart contains a text page	

UGKO AD 2.25 Visual segment surface (VSS) penetration

To be developed.

AERODROME CHART - ICAO

42° 10' 37" N
042° 28' 58" E




ELEV 160'

TWR 125.500

KUTAISI/Kopitnari (UGKO)

RWY	DIRECTION	THR	BEARING STRENGTH
07	073°	42°10'30"N 042°28'04"E	PCR 570/F/C/X/U
25	253°	42°10'43"N 042°29'51"E	

ELEVATIONS ARE IN FEET, DISTANCES ARE IN METRES
AND BEARINGS ARE MAGNETIC

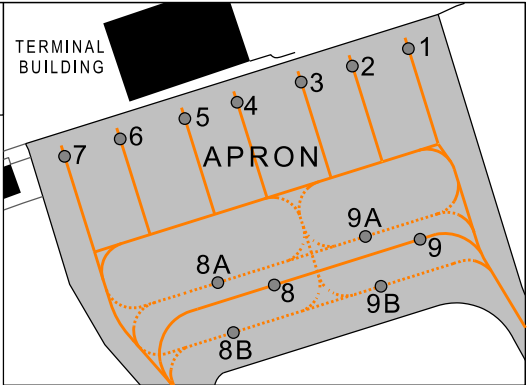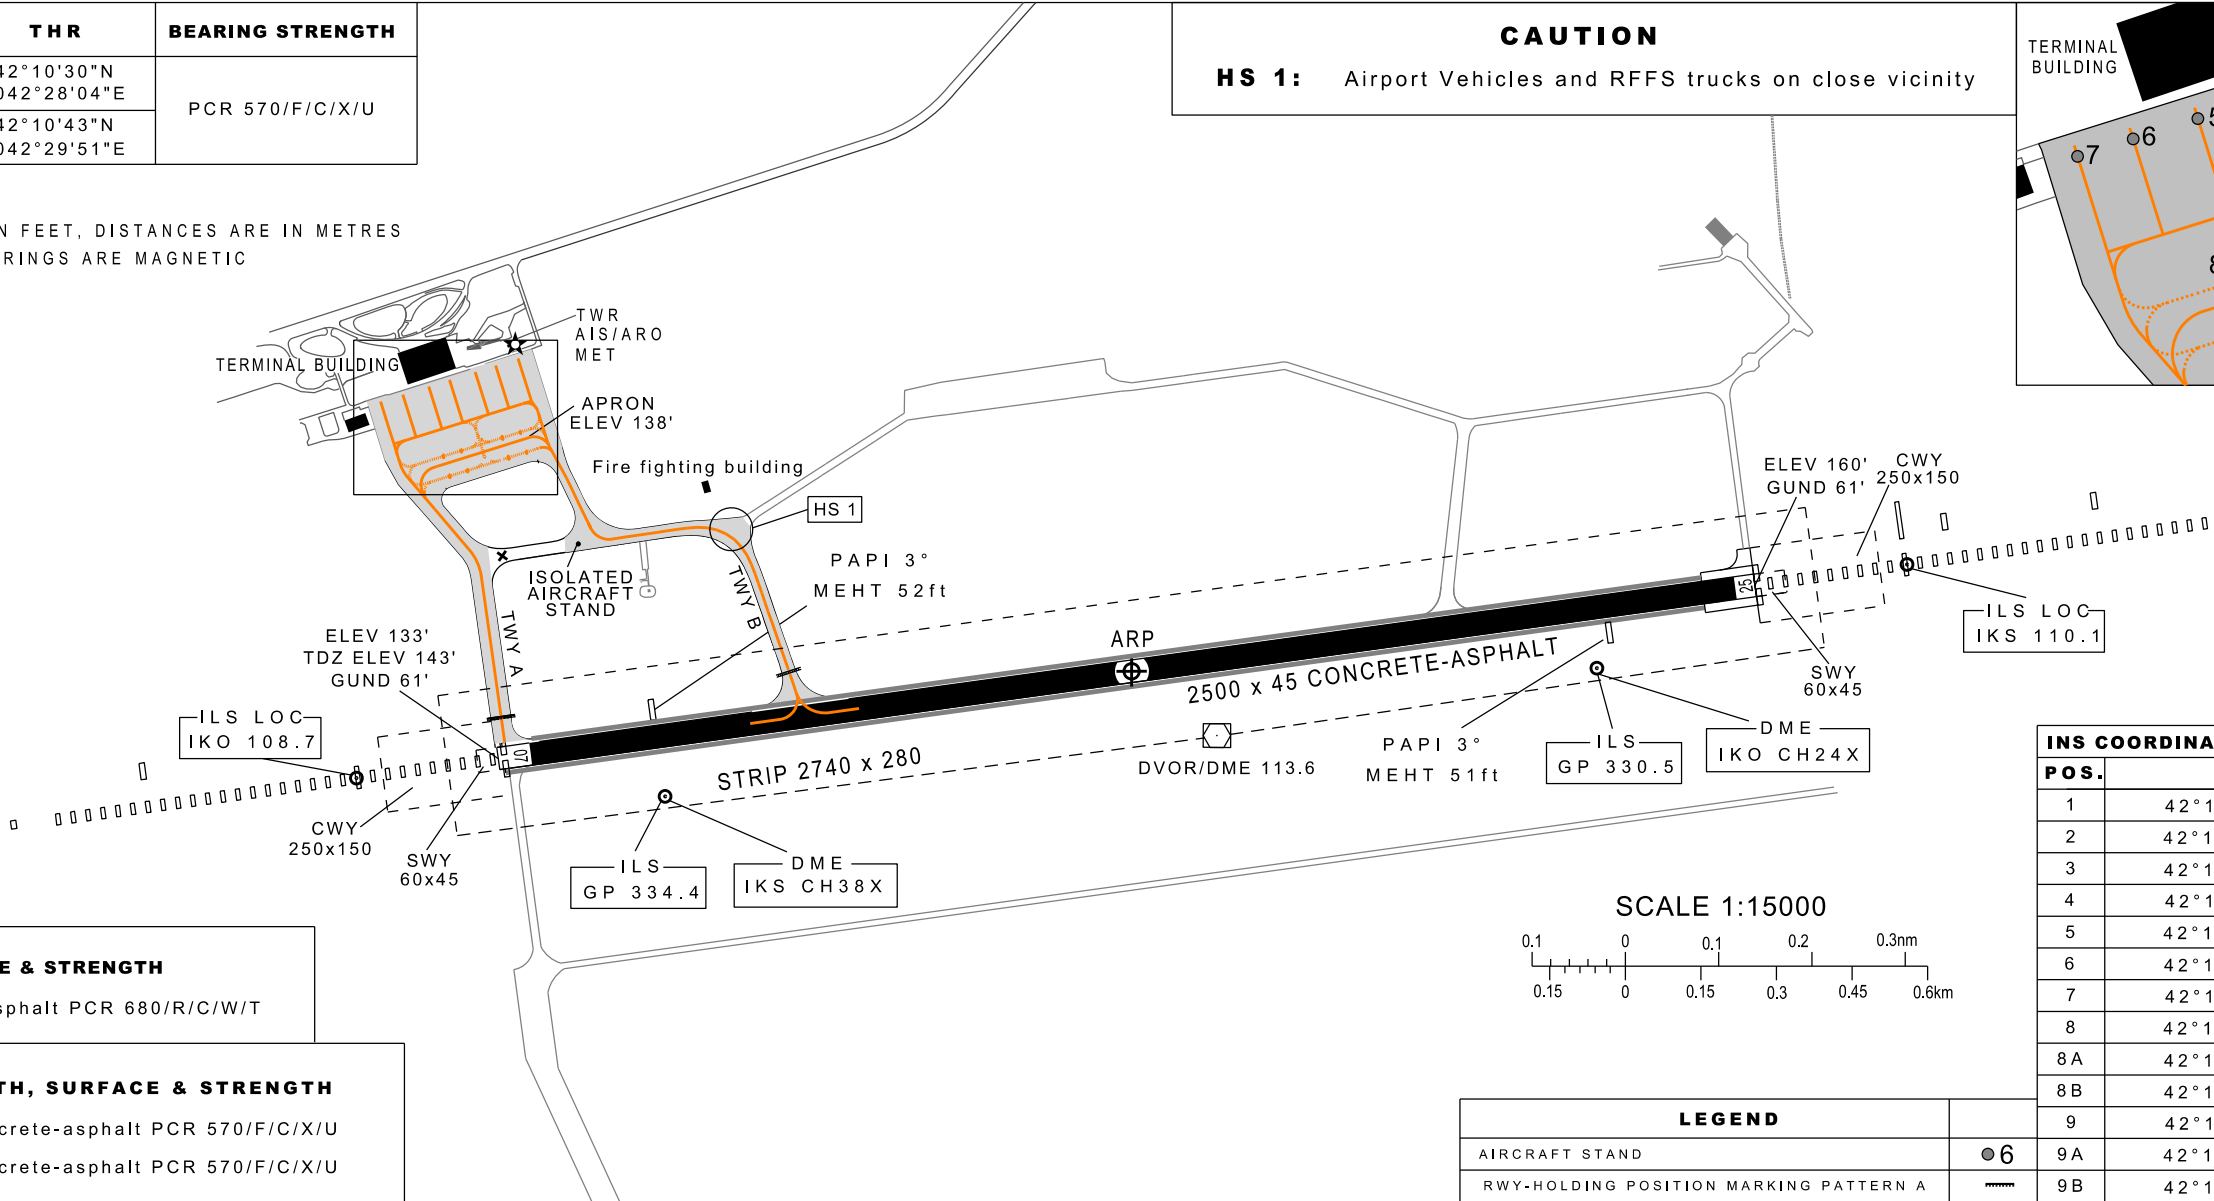


INS COORDINATES FOR AIRCRAFT STANDS	
POS.	COORDINATES
1	42°10'55.1"N 042°28'04.6"E
2	42°10'54.6"N 042°28'02.7"E
3	42°10'54.1"N 042°28'01.0"E
4	42°10'53.6"N 042°27'58.8"E
5	42°10'53.1"N 042°27'57.0"E
6	42°10'52.5"N 042°27'54.8"E
7	42°10'52.1"N 042°27'52.9"E
8	42°10'48.9"N 042°28'00.3"E
8A	42°10'49.1"N 042°27'59.1"E
8B	42°10'47.9"N 042°27'59.8"E
9	42°10'50.2"N 042°28'05.2"E
9A	42°10'50.4"N 042°28'04.1"E
9B	42°10'49.2"N 042°28'04.7"E

LEGEND	
AIRCRAFT STAND	●6
RWY-HOLDING POSITION MARKING PATTERN A	▬▬▬

APRON SURFACE & STRENGTH
APRON : Concrete-asphalt PCR 680/R/C/W/T

TAXIWAYS WIDTH, SURFACE & STRENGTH
TWY A: 23 M Concrete-asphalt PCR 570/F/C/X/U
TWY B: 18 M Concrete-asphalt PCR 570/F/C/X/U

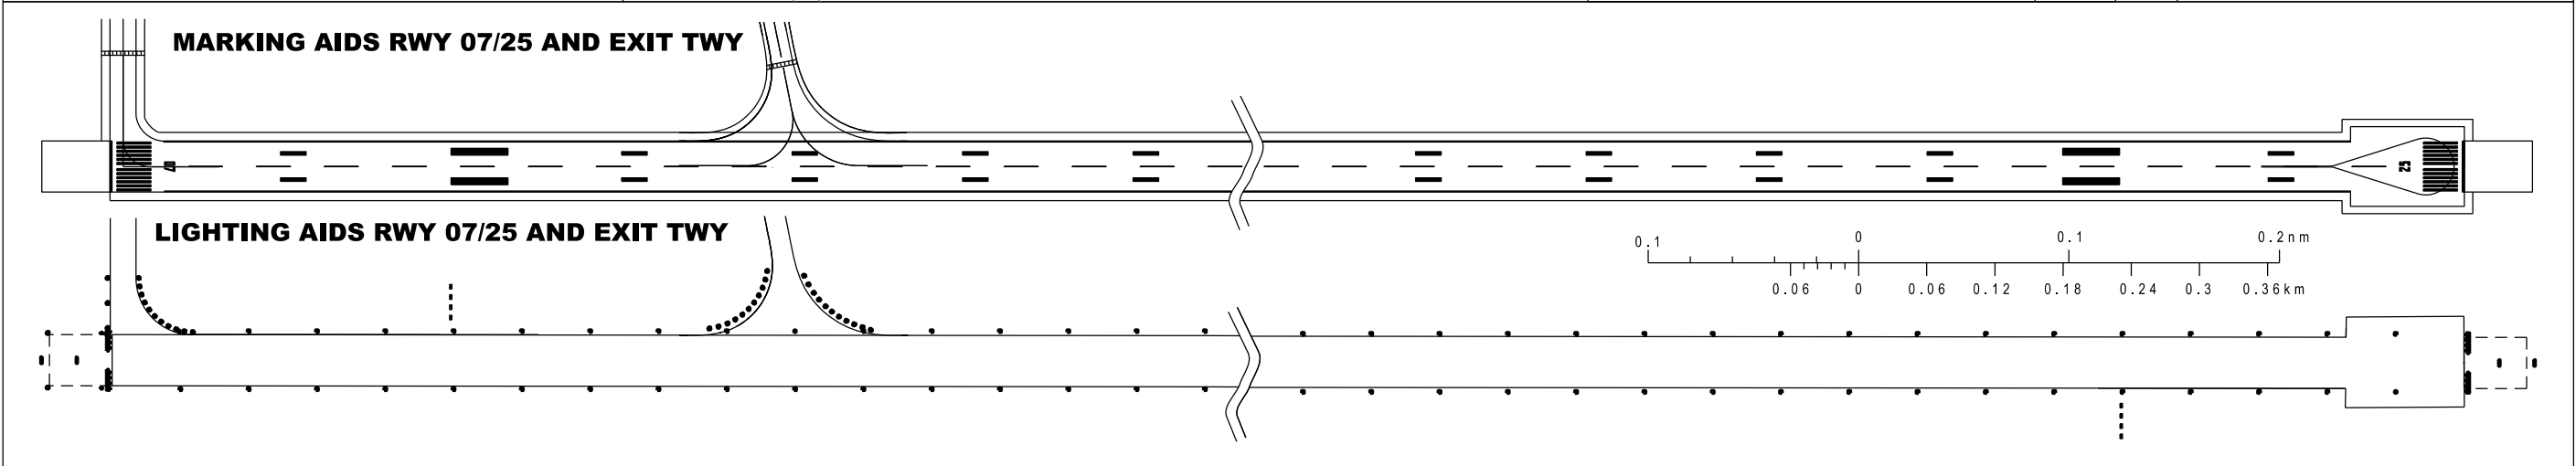


Changes: Bearing Strength and aircraft stands updated, legend added

PAGE INTENTIONALLY LEFT BLANK

AREA CHART - ICAO

KUTAISI APP 127.100
TWR 125.500

KUTAISI/Kopitnari (UGKO)

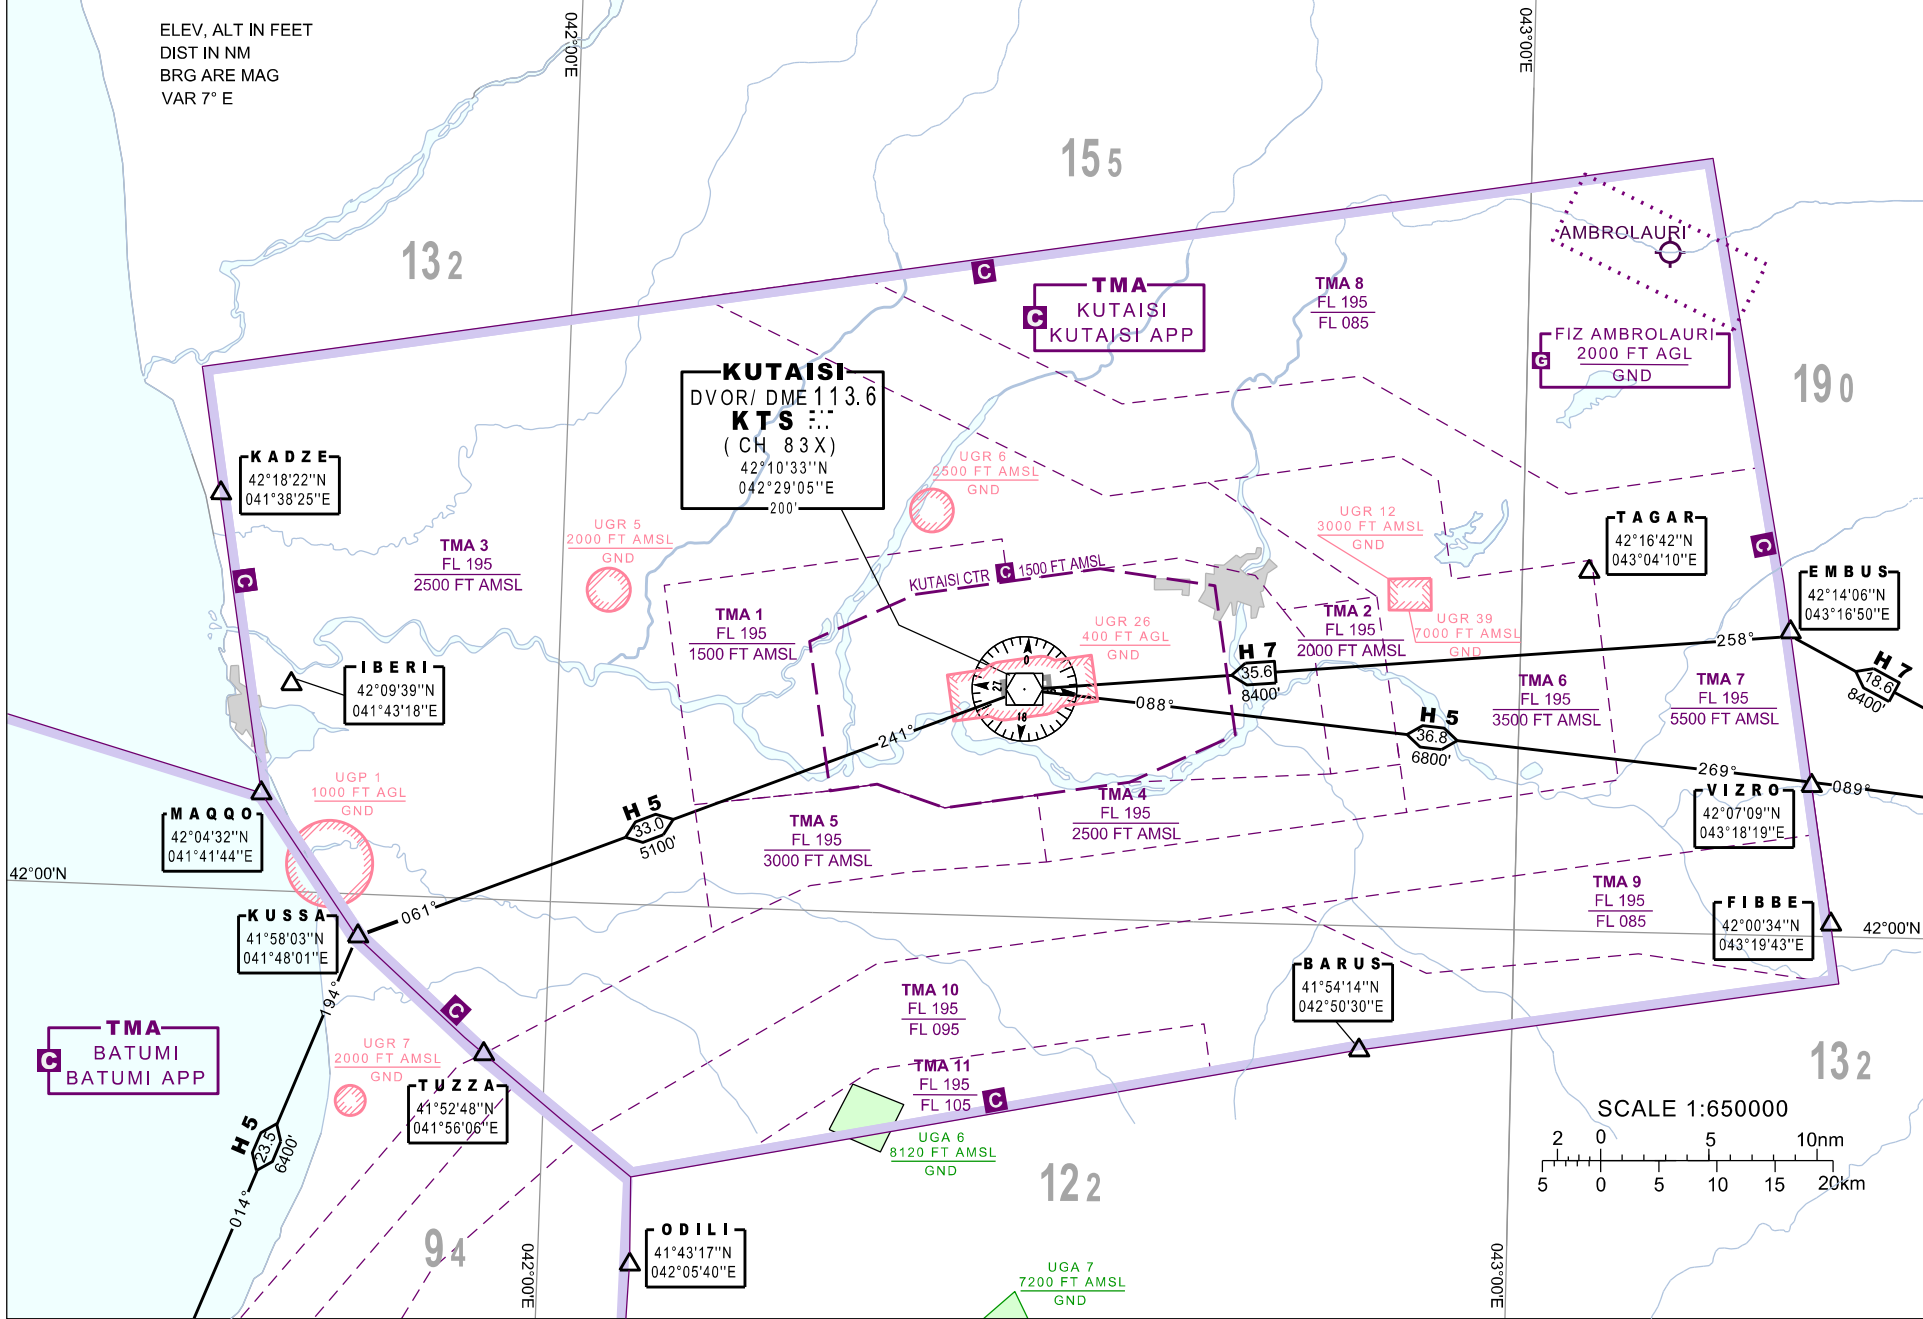

Changes: Chart reissued


PAGE INTENTIONALLY LEFT BLANK

**STANDARD DEPARTURE CHART-
INSTRUMENT (SID) - ICAO**

TRANSITION ALTITUDE
7000'

APP 127.100
TWR 125.500

**KUTAISI/Kopitnari (UGKO)
RWY 07**
KADZE 1G VIZRO 1G
KUSSA 1G

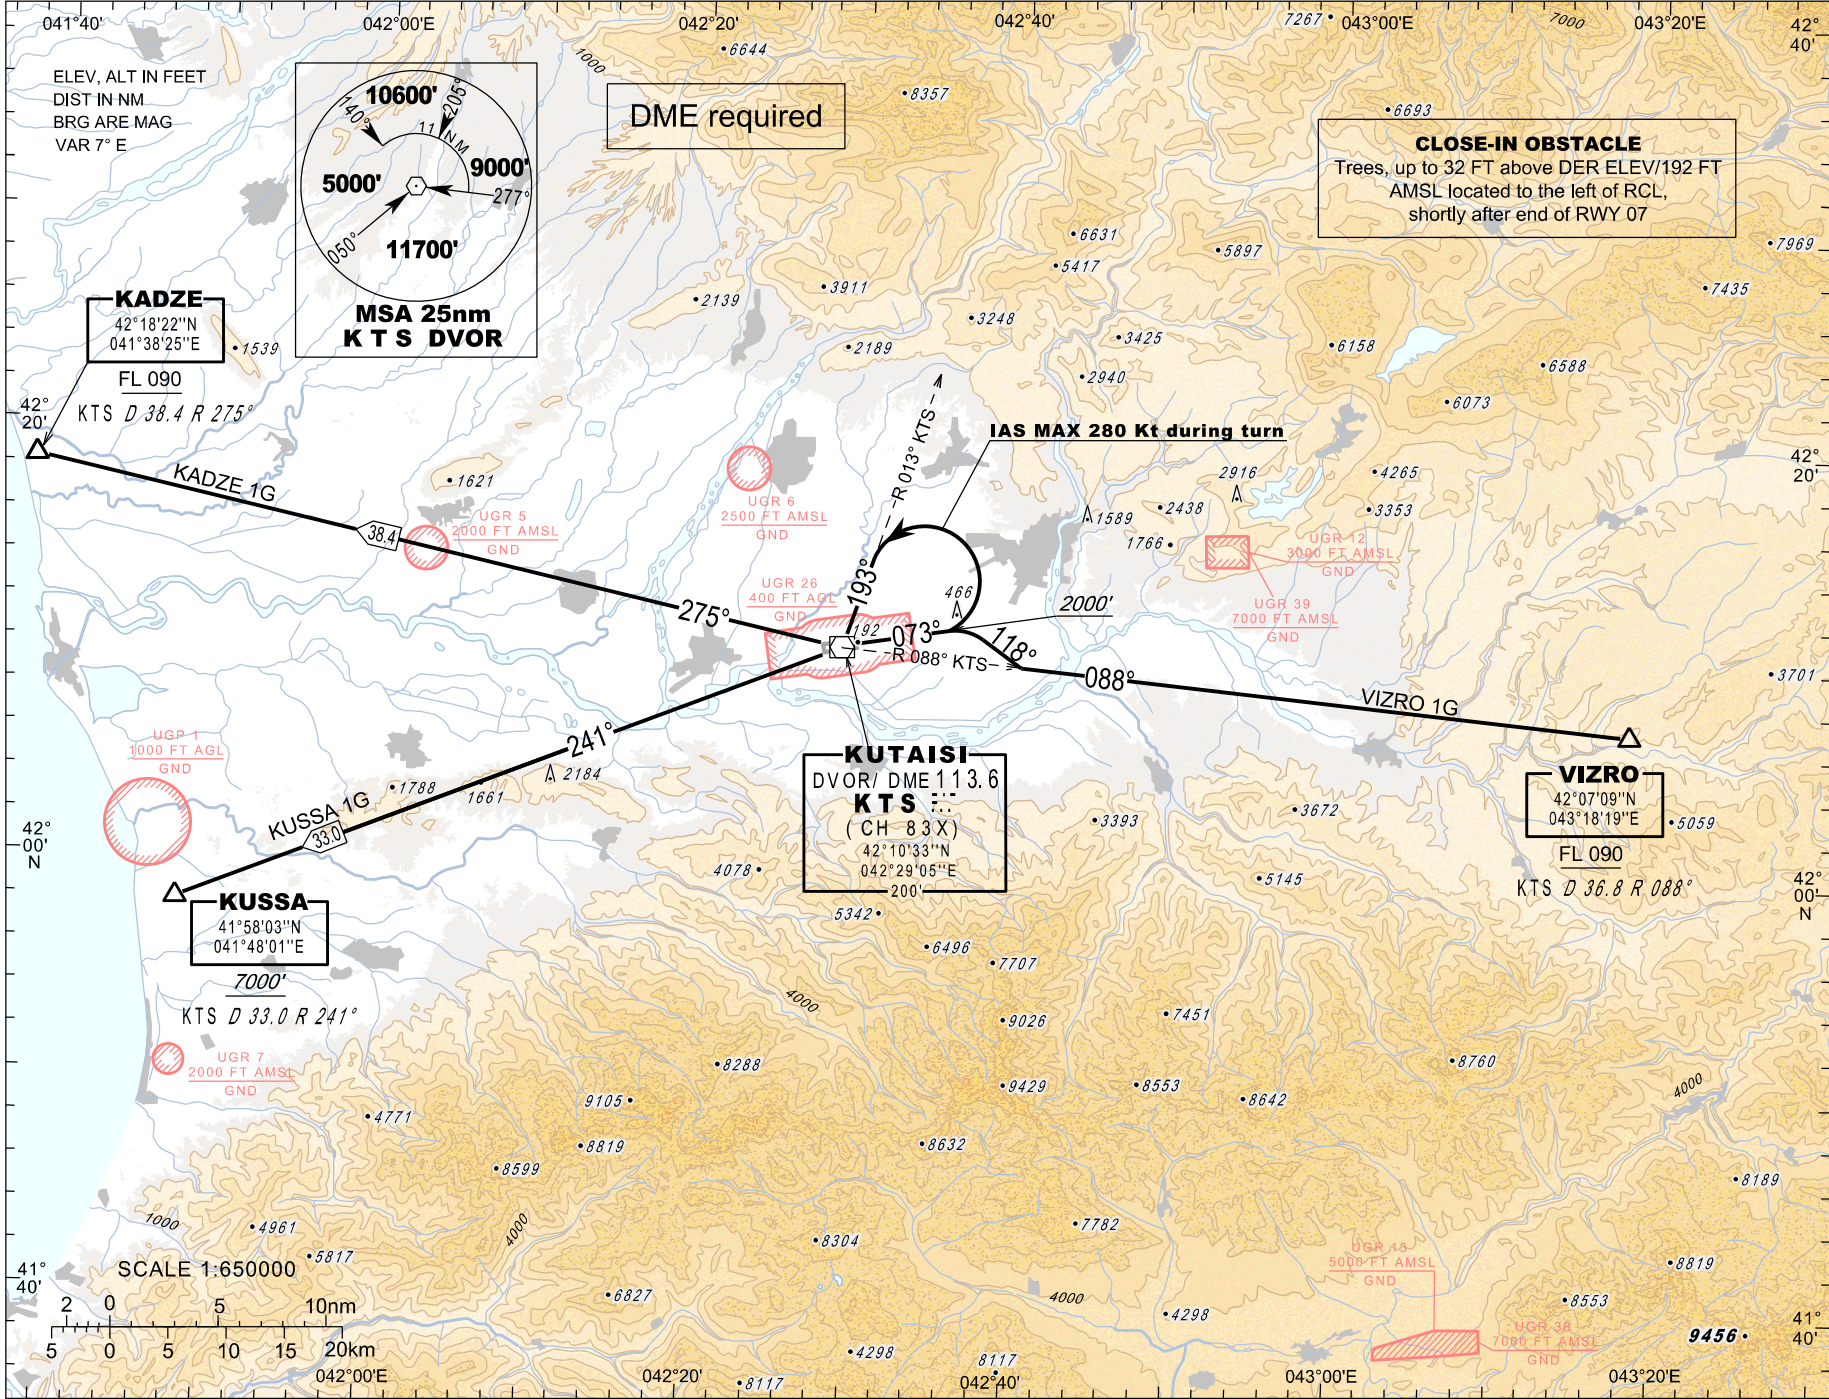

Changes: Chart reissued

PAGE INTENTIONALLY LEFT BLANK

STANDARD DEPARTURE ROUTES - INSTRUMENT - RWY 07

SID	ROUTING AND ALTITUDES	MIN.CLIMB GRAD.
KADZE 1G	KADZE ONE GOLF Climb runway heading to FL090 or above. At 2000 FT turn LEFT to intercept and follow R-013° KTS inbound KTS. Then proceed to KADZE, R-275° KTS. Do not turn before the DER. IAS Max during the first turn 280Kt.	3.7% to 4500 FT
KUSSA 1G	KUSSA ONE GOLF Climb runway heading to 7000 FT or above. At 2000 FT turn LEFT to intercept and follow R-013° KTS inbound KTS. Then proceed to KUSSA, R-241° KTS. Do not turn before the DER. IAS Max during the first turn 280Kt.	3.7% to 4500 FT
VIZRO 1G	VIZRO ONE GOLF Climb runway heading to FL090 or above. At 2000 FT turn RIGHT heading 118° to intercept and follow R-088° KTS inbound VIZRO. Do not turn before the DER.	4.0% to FL 090


PAGE INTENTIONALLY LEFT BLANK

**STANDARD DEPARTURE CHART-
INSTRUMENT (SID) - ICAO**

TRANSITION ALTITUDE
7000'

APP 127.100
TWR 125.500

**KUTAISI/Kopitnari (UGKO)
RNAV Rwy 07
KADZE 1D KADZE 1F
KUSSA 1D VIZRO 1D**

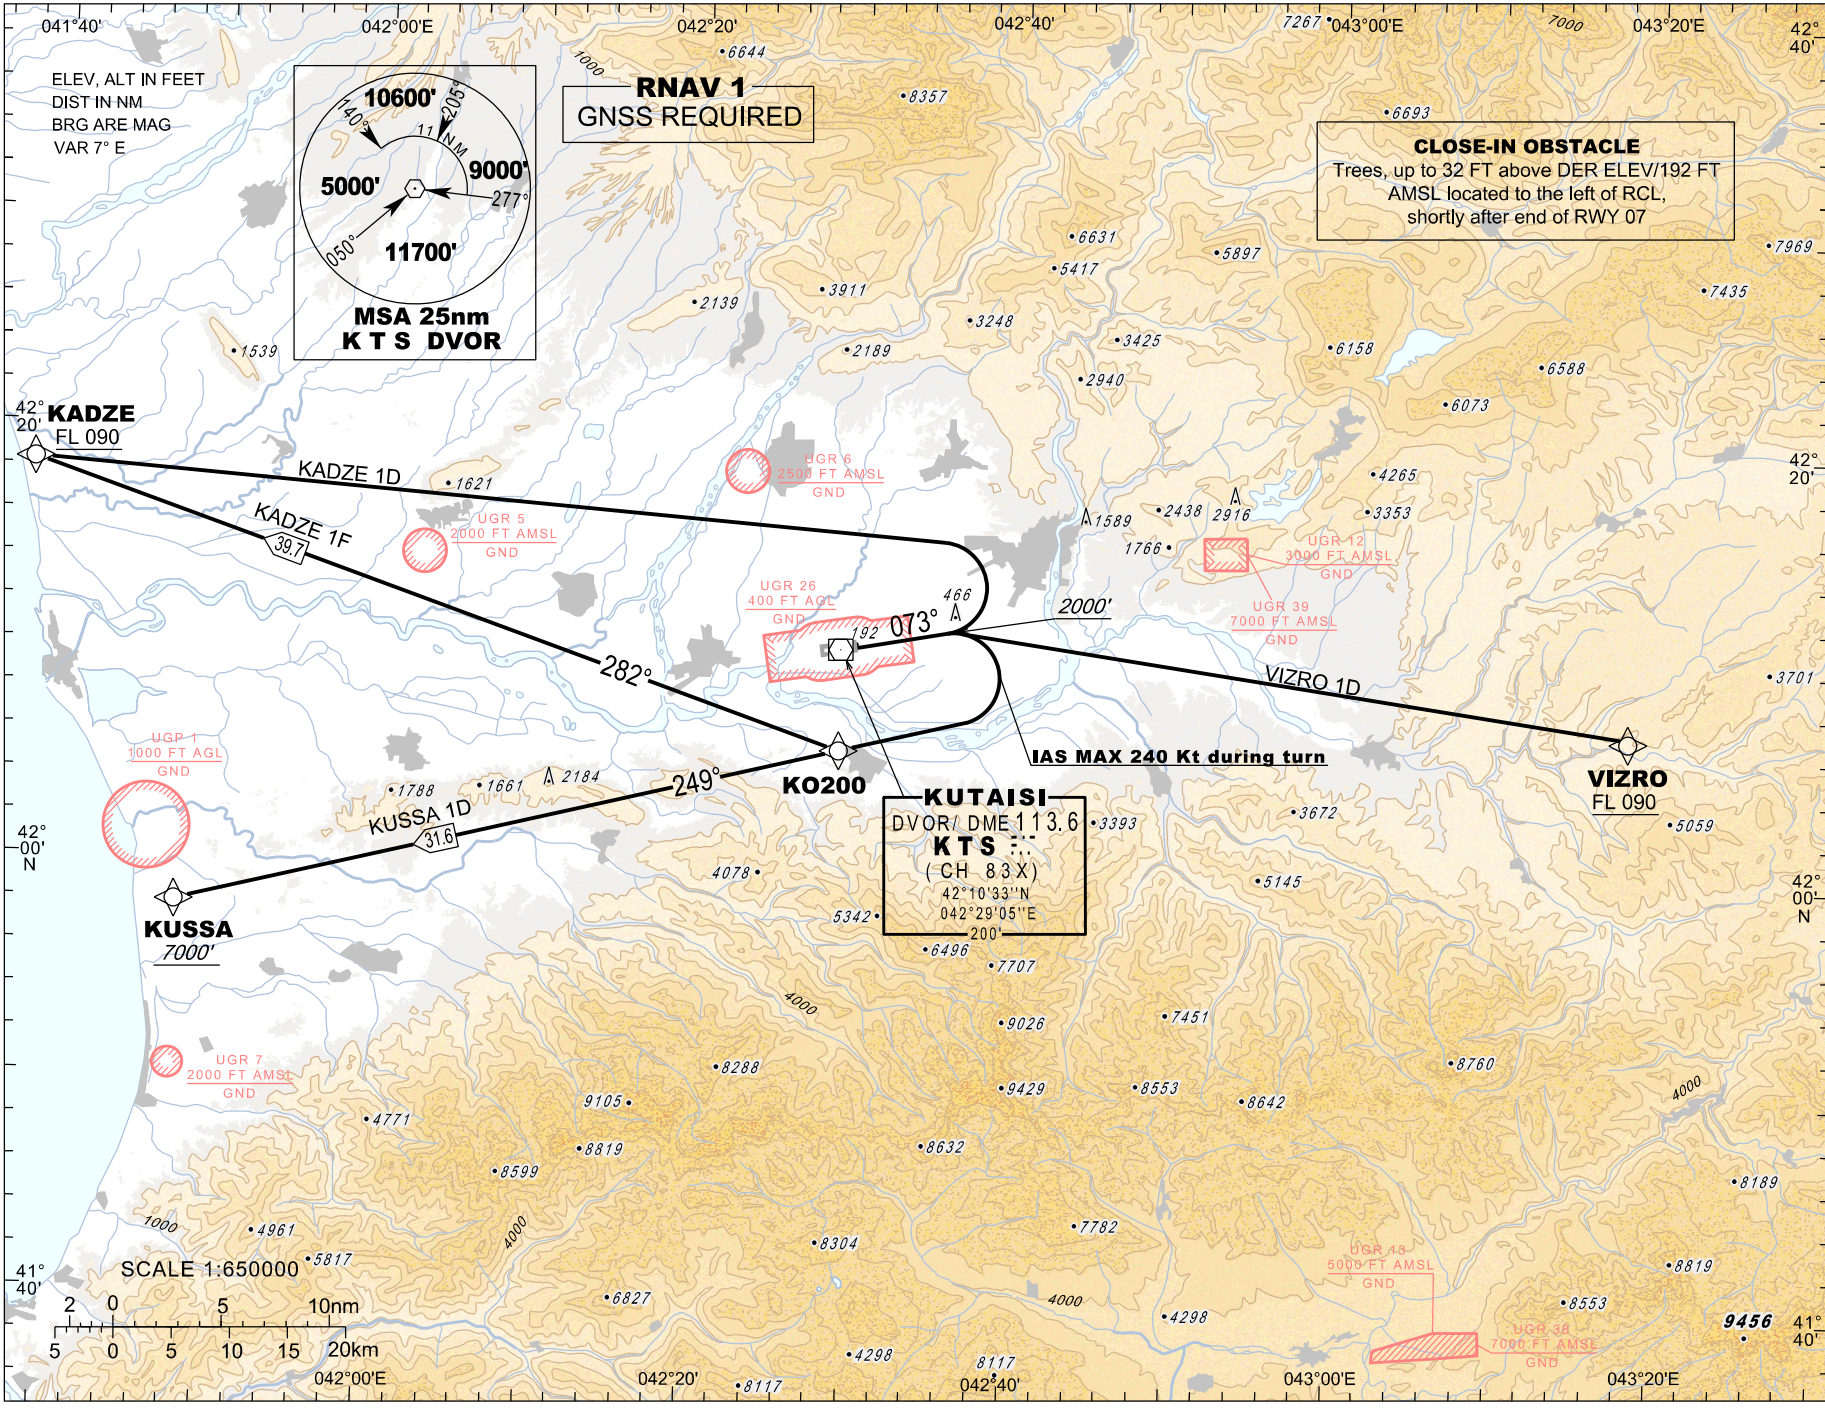

PAGE INTENTIONALLY LEFT BLANK

STANDARD DEPARTURE ROUTES - RNAV (GNSS) INSTRUMENT - RWY07

SID	ROUTING AND ALTITUDES			MIN.CLIMB GRAD.			Comment		
KADZE 1D	KADZE ONE DELTA			3.7% to 4500 FT			NIL		
	Climb on course 073°, when passing 2000 FT turn LEFT direct to KADZE. Cross KADZE at or above FL 090.								
	Do not turn before the DER.								
RNAV 1 SID Coding Table of KADZE 1D									
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification
	Identifier	Flyover	Coordinates				Level	Speed kt	
CA	-	-	-	073° (080.4°)	-	-	A2000	-	RNAV1
DF	KADZE	-	42°18'22.0"N 041°38'25.0"E	-	-	L	+FL090	-	RNAV1

SID	ROUTING AND ALTITUDES			MIN.CLIMB GRAD.	Comment				
KADZE 1F	KADZE ONE FOXTROT			4.0% to 5000 FT	Ignore speed restriction of KO200 after turn is completed inbound KO200				
	Climb on course 073°, when passing 2000 FT turn RIGHT direct to KO200, track to KADZE. Cross KADZE at or above FL 090. Do not turn before the DER.								
RNAV 1 SID Coding Table of KADZE 1F									
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification
	Identifier	Flyover	Coordinates				Level	Speed kt	
CA	-	-	-	073° (080.4°)	-	-	A2000	-	RNAV1
DF	KO200	-	42°05'52.0"N 042°29'07.0"E	-	-	R	-	-240	RNAV1
TF	KADZE	-	42°18'22.0"N 041°38'25.0"E	282° (288.6°)	39.7	-	+FL090	-	RNAV1

SID	ROUTING AND ALTITUDES			MIN.CLIMB GRAD.	Comment				
VIZRO 1D	VIZRO ONE DELTA Climb on course 073°, when passing 2000 FT turn RIGHT direct to VIZRO. Cross VIZRO at or above FL 090. Do not turn before the DER.			4.0% to FL 090	NIL				
RNAV 1 SID Coding Table of VIZRO 1D									
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification
	Identifier	Flyover	Coordinates				Level	Speed kt	
CA	-	-	-	073° (080.4°)	-	-	A2000	-	RNAV1
DF	VIZRO	-	42°07'09.0"N 043°18'19.0"E	-	-	R	+FL090	-	RNAV1


SID	ROUTING AND ALTITUDES			MIN.CLIMB GRAD.	Comment				
KUSSA 1D	KUSSA ONE DELTA			4.0% to 5000 FT	Ignore speed restriction of KO200 after turn is completed inbound KO200				
	Climb on course 073°, when passing 2000 FT turn RIGHT direct to KO200, track to KUSSA. Cross KUSSA at or above 7000 FT. Do not turn before the DER.								
RNAV 1 SID Coding Table of KUSSA 1D									
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification
	Identifier	Flyover	Coordinates				Level	Speed kt	
CA	-	-	-	073° (080.4°)	-	-	A2000	-	RNAV1
DF	KO200	-	42°05'52.0"N 042°29'07.0"E	-	-	R	-	-240	RNAV1
TF	KUSSA	-	41°58'03.0"N 041°48'01.0"E	249° (255.9°)	31.6	-	+A7000	-	RNAV1

PAGE INTENTIONALLY LEFT BLANK

**KUTAI SI/Kopitnari (UGKO)
RNAV Rwy 25**

APP	127.100
TWR	125.500

KADZE 1E VIZRO 1E
KUSSA 1E

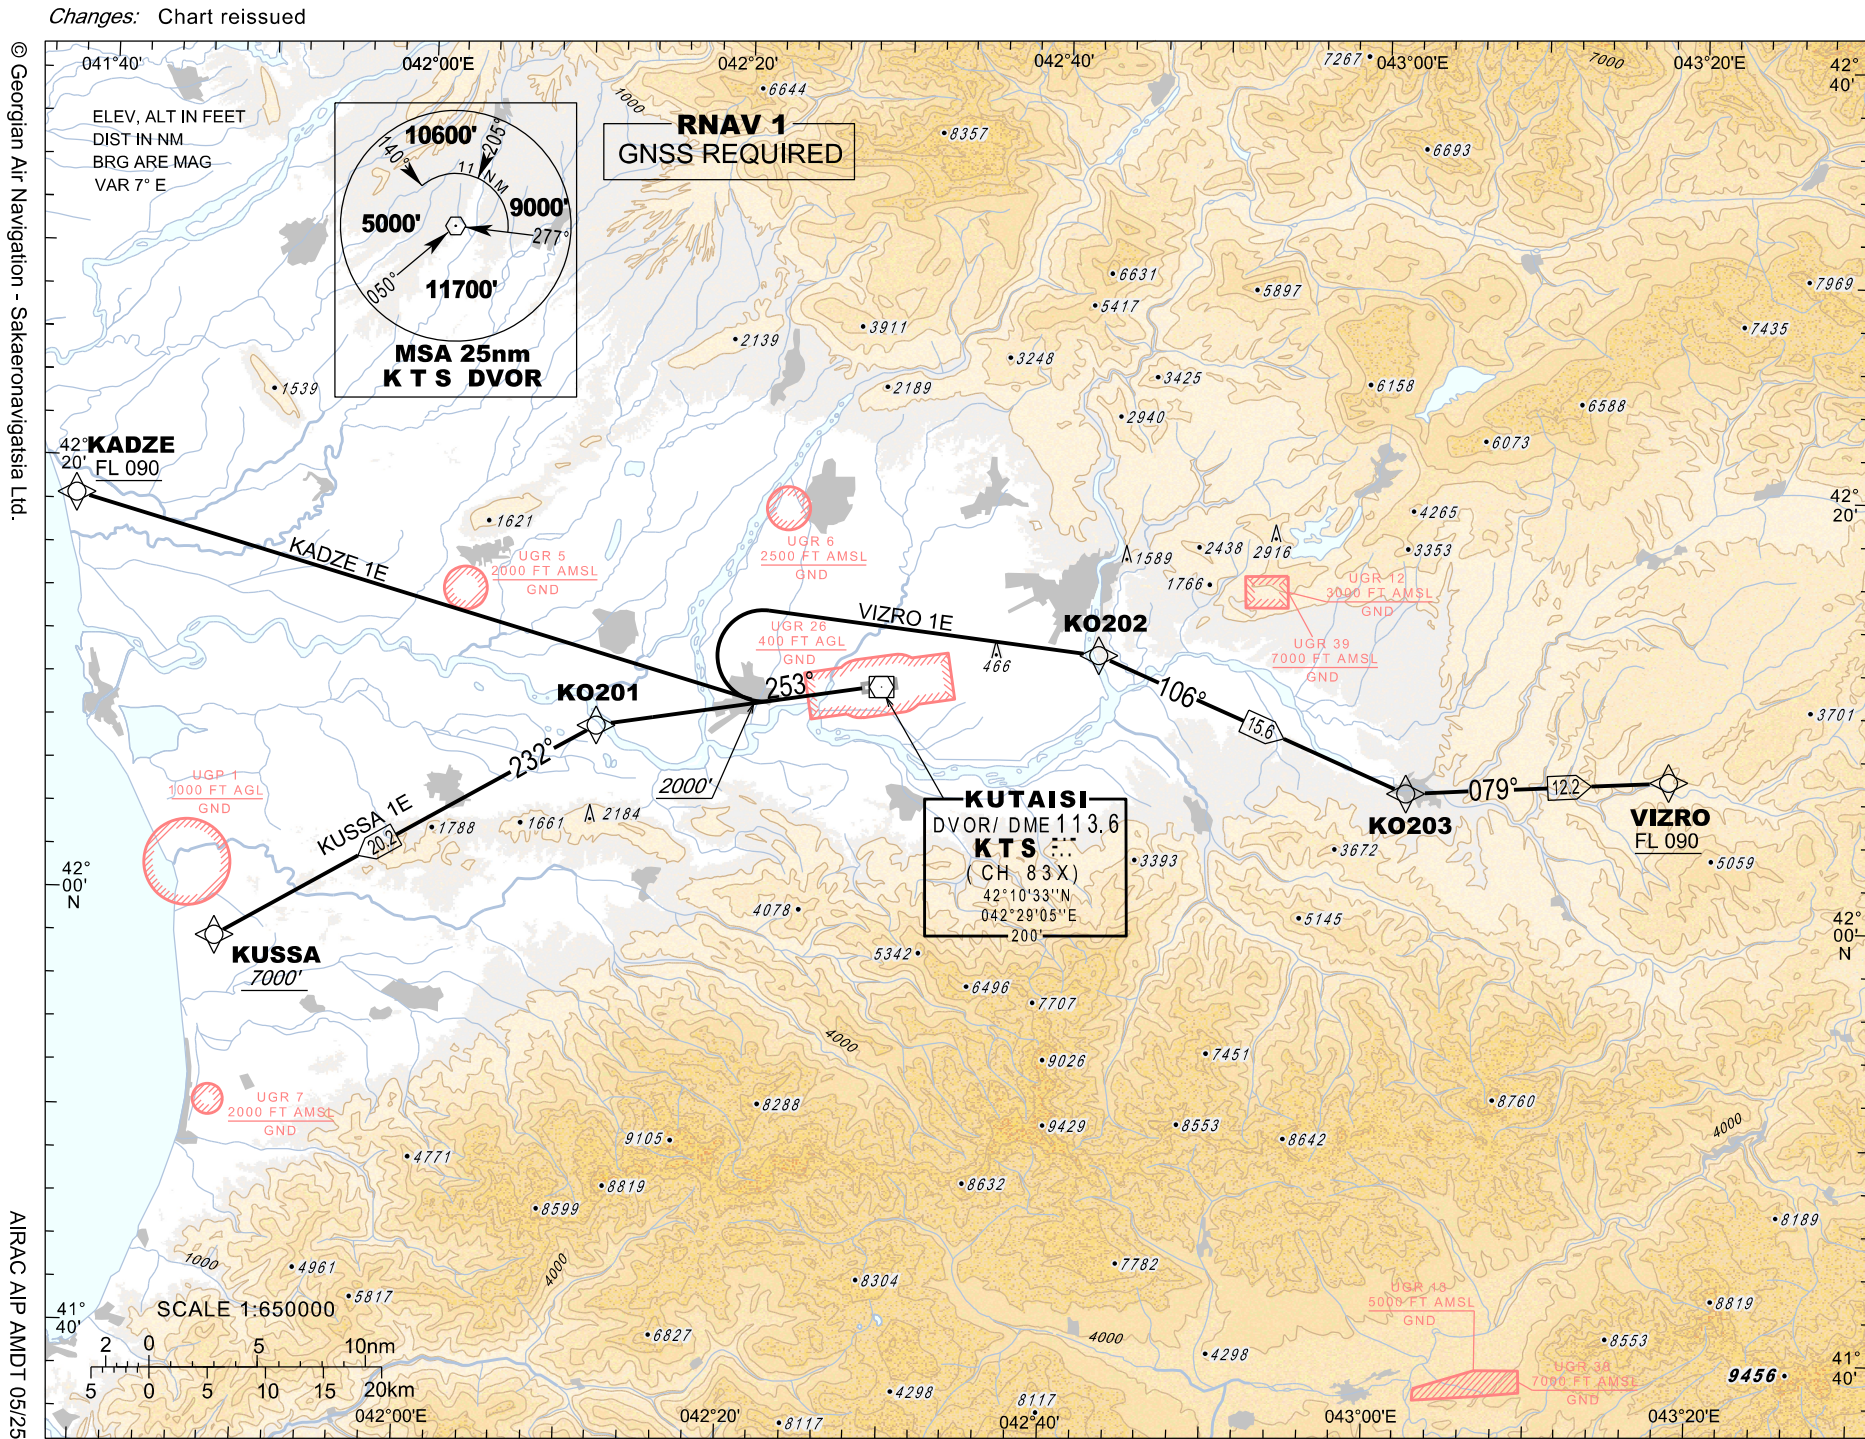

PAGE INTENTIONALLY LEFT BLANK

STANDARD DEPARTURE ROUTES - RNAV (GNSS) INSTRUMENT - RWY25

SID	ROUTING AND ALTITUDES			MIN.CLIMB GRAD.	Comment				
KADZE 1E	KADZE ONE ECHO			3.8% to FL 090	NIL				
	Climb on course 253°, when passing 2000 FT turn RIGHT direct to KADZE. Cross KADZE at or above FL 090.								
	Do not turn before the DER.								
RNAV 1 SID Coding Table of KADZE 1E									
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification
	Identifier	Flyover	Coordinates				Level	Speed kt	
CA	-	-	-	253° (260.4°)	-	-	A2000	-	RNAV1
DF	KADZE	-	42°18'22.0"N 041°38'25.0"E	-	-	R	+FL090	-	RNAV1

SID	ROUTING AND ALTITUDES			MIN.CLIMB GRAD.	Comment				
VIZRO 1E	VIZRO ONE ECHO			-	NIL				
	Climb on course 253°, when passing 2000 FT turn RIGHT direct to KO202, track to KO203, track to VIZRO.								
	Cross VIZRO at or above FL 090.								
	Do not turn before the DER.								
RNAV 1 SID Coding Table of VIZRO 1E									
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification
	Identifier	Flyover	Coordinates				Level	Speed kt	
CA	-	-	-	253° (260.4°)	-	-	A2000	-	RNAV1
DF	KO202	-	42°12'18.0"N 042°42'36.0"E	-	-	R	-	-	RNAV1
TF	KO203	-	42°06'14.0"N 043°01'58.0"E	106° (112.8°)	15.6	-	-	-	RNAV1
TF	VIZRO	-	42°07'09.0"N 043°18'19.0"E	079° (086.4°)	12.2	-	+FL090	-	RNAV1

SID	ROUTING AND ALTITUDES			MIN.CLIMB GRAD.		Comment			
KUSSA 1E	KUSSA ONE ECHO			-		NIL			
	To KO201 on course 253°, to KUSSA. Cross KUSSA at or above 7000 FT.								
RNAV 1 SID Coding Table of KUSSA 1E									
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification
	Identifier	Flyover	Coordinates				Level	Speed kt	
CF	KO201	-	42°08'23.0"N 042°11'21.0"E	253° (260.5°)	-	-	-	-	RNAV1
TF	KUSSA	-	41°58'03.0"N 041°48'01.0"E	232° (239.0°)	20.2	-	+A7000	-	RNAV1


PAGE INTENTIONALLY LEFT BLANK

**STANDARD ARRIVAL
CHART - INSTRUMENT
(STAR) - ICAO**

TRANSITION LEVEL FL 090
TRANSITION ALTITUDE 7000'

APP 127.100
TWR 125.500

**KUTAISI/Kopitnari (UGKO)
RNAV Rwy 07
TUZZA 1A MAQQO 1A
BASKA 1A EMBUS 1A**

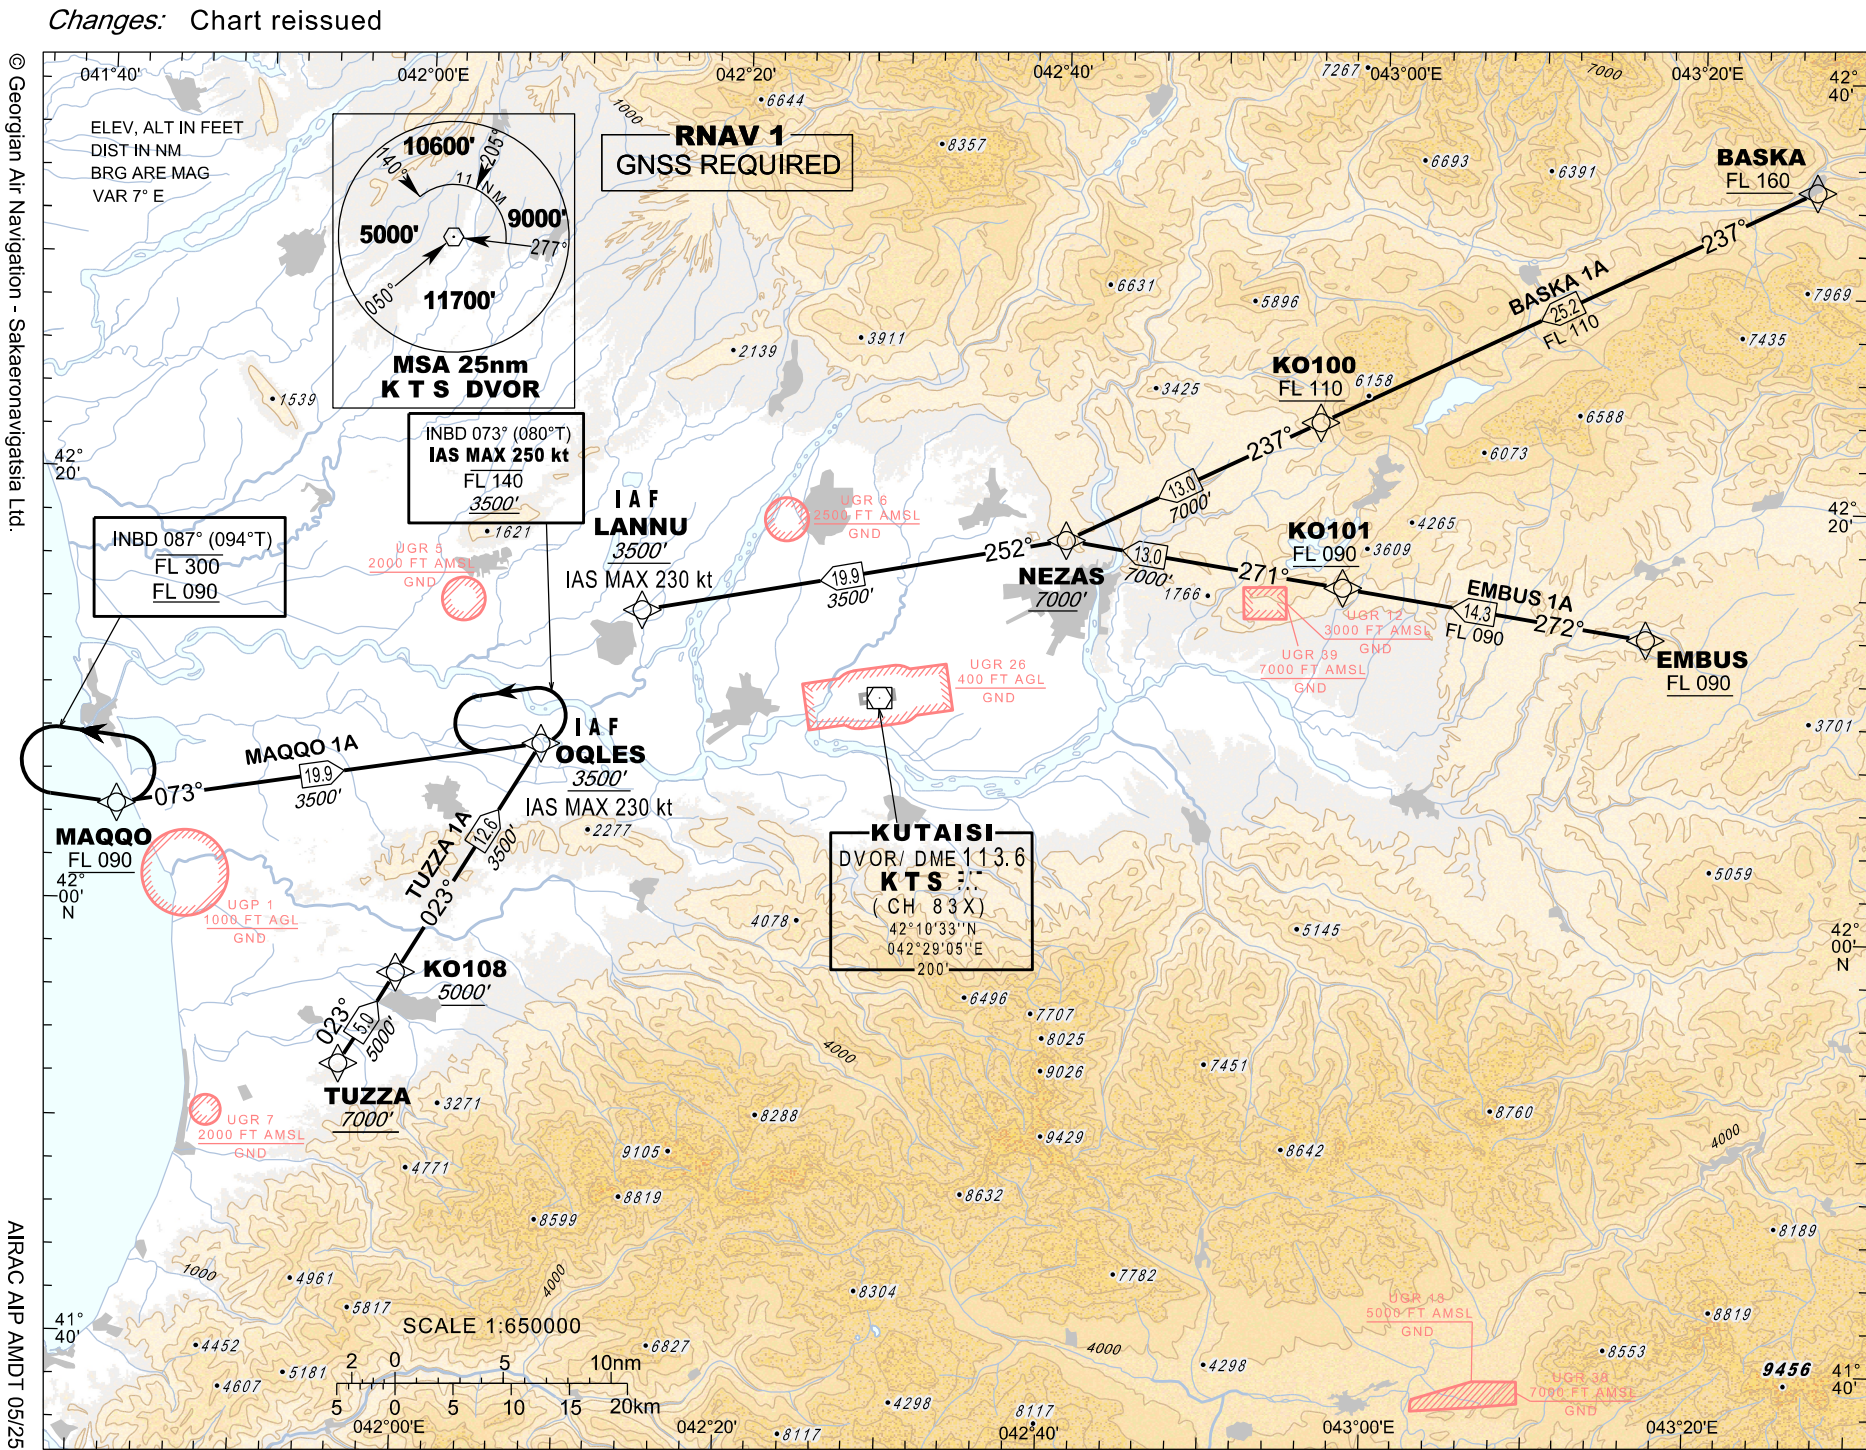

PAGE INTENTIONALLY LEFT BLANK

STANDARD ARRIVAL ROUTES - RNAV (GNSS) INSTRUMENT - RWY 07

RNAV 1 STAR Coding Table of BASKA 1A										
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification	
	Identifier	Flyover	Coordinates				Level	Speed kt		
IF	BASKA	-	42°34'59.0"N 043°26'55.0"E	-	-	-	+FL160	-	RNAV1	
TF	KO100	-	42°23'54.0"N 042°56'14.0"E	237° (244.1°)	25.2	-	+FL110	-	RNAV1	
TF	NEZAS	-	42°18'07.0"N 042°40'29.0"E	237° (243.7°)	13.0	-	+A7000	-	RNAV1	
TF	LANNU	-	42°14'19.0"N 042°14'06.0"E	252° (259.1°)	19.9	-	+A3500	-230	RNAV1	

RNAV 1 STAR Coding Table of EMBUS 1A										
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification	
	Identifier	Flyover	Coordinates				Level	Speed kt		
IF	EMBUS	-	42°14'06.0"N 043°16'50.0"E	-	-	-	+FL090	-	RNAV1	
TF	KO101	-	42°16'14.0"N 042°57'50.0"E	272° (278.7°)	14.3	-	+FL090	-	RNAV1	
TF	NEZAS	-	42°18'07.0"N 042°40'29.0"E	271° (278.4°)	13.0	-	+A7000	-	RNAV1	
TF	LANNU	-	42°14'19.0"N 042°14'06.0"E	252° (259.1°)	19.9	-	+A3500	-230	RNAV1	

RNAV 1 STAR Coding Table of MAQQO 1A										
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification	
	Identifier	Flyover	Coordinates				Level	Speed kt		
IF	MAQQO	-	42°04'32.0"N 041°41'44.0"E	-	-	-	+FL090	-	RNAV1	
TF	OQLES	-	42°07'58.0"N 042°08'03.0"E	073° (079.9°)	19.9	-	+A3500	-230	RNAV1	

RNAV 1 STAR Coding Table of TUZZA 1A										
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification	
	Identifier	Flyover	Coordinates				Level	Speed kt		
IF	TUZZA	-	41°52'48.0"N 041°56'06.0"E	-	-	-	+A7000	-	RNAV1	
TF	KO108	-	41°57'07.0"N 041°59'29.0"E	023° (030.2°)	5.0	-	+A5000	-	RNAV1	
TF	OQLES	-	42°07'58.0"N 042°08'03.0"E	023° (030.3°)	12.6	-	+A3500	-230	RNAV1	

RNAV Holding Coding Tables								
Fix Identifier	Inbound course °MAG(°True)	Time (min)	Turn Direction	Min alt.	Max alt.	Speed limit (kt)	Mag. VAR	Navigation Specification
MAQQO	087° (094.0°)	1.5*	L	FL090	FL300	280	-7°	RNAV1
OQLES	073° (080.0°)	1.0	L	A3500	FL140	250	-7°	RNAV1

* 1.0 min at or below FL140

PAGE INTENTIONALLY LEFT BLANK


**STANDARD ARRIVAL
CHART - INSTRUMENT
(STAR) - ICAO**

TRANSITION LEVEL FL 090
TRANSITION ALTITUDE 7000'

APP 127.100
TWR 125.500

**KUTAISI/Kopitnari (UGKO)
RNAV Rwy 25
TUZZA 1B MAQQO 1B
BASKA 1B EMBUS 1B**

Changes: Chart reissued

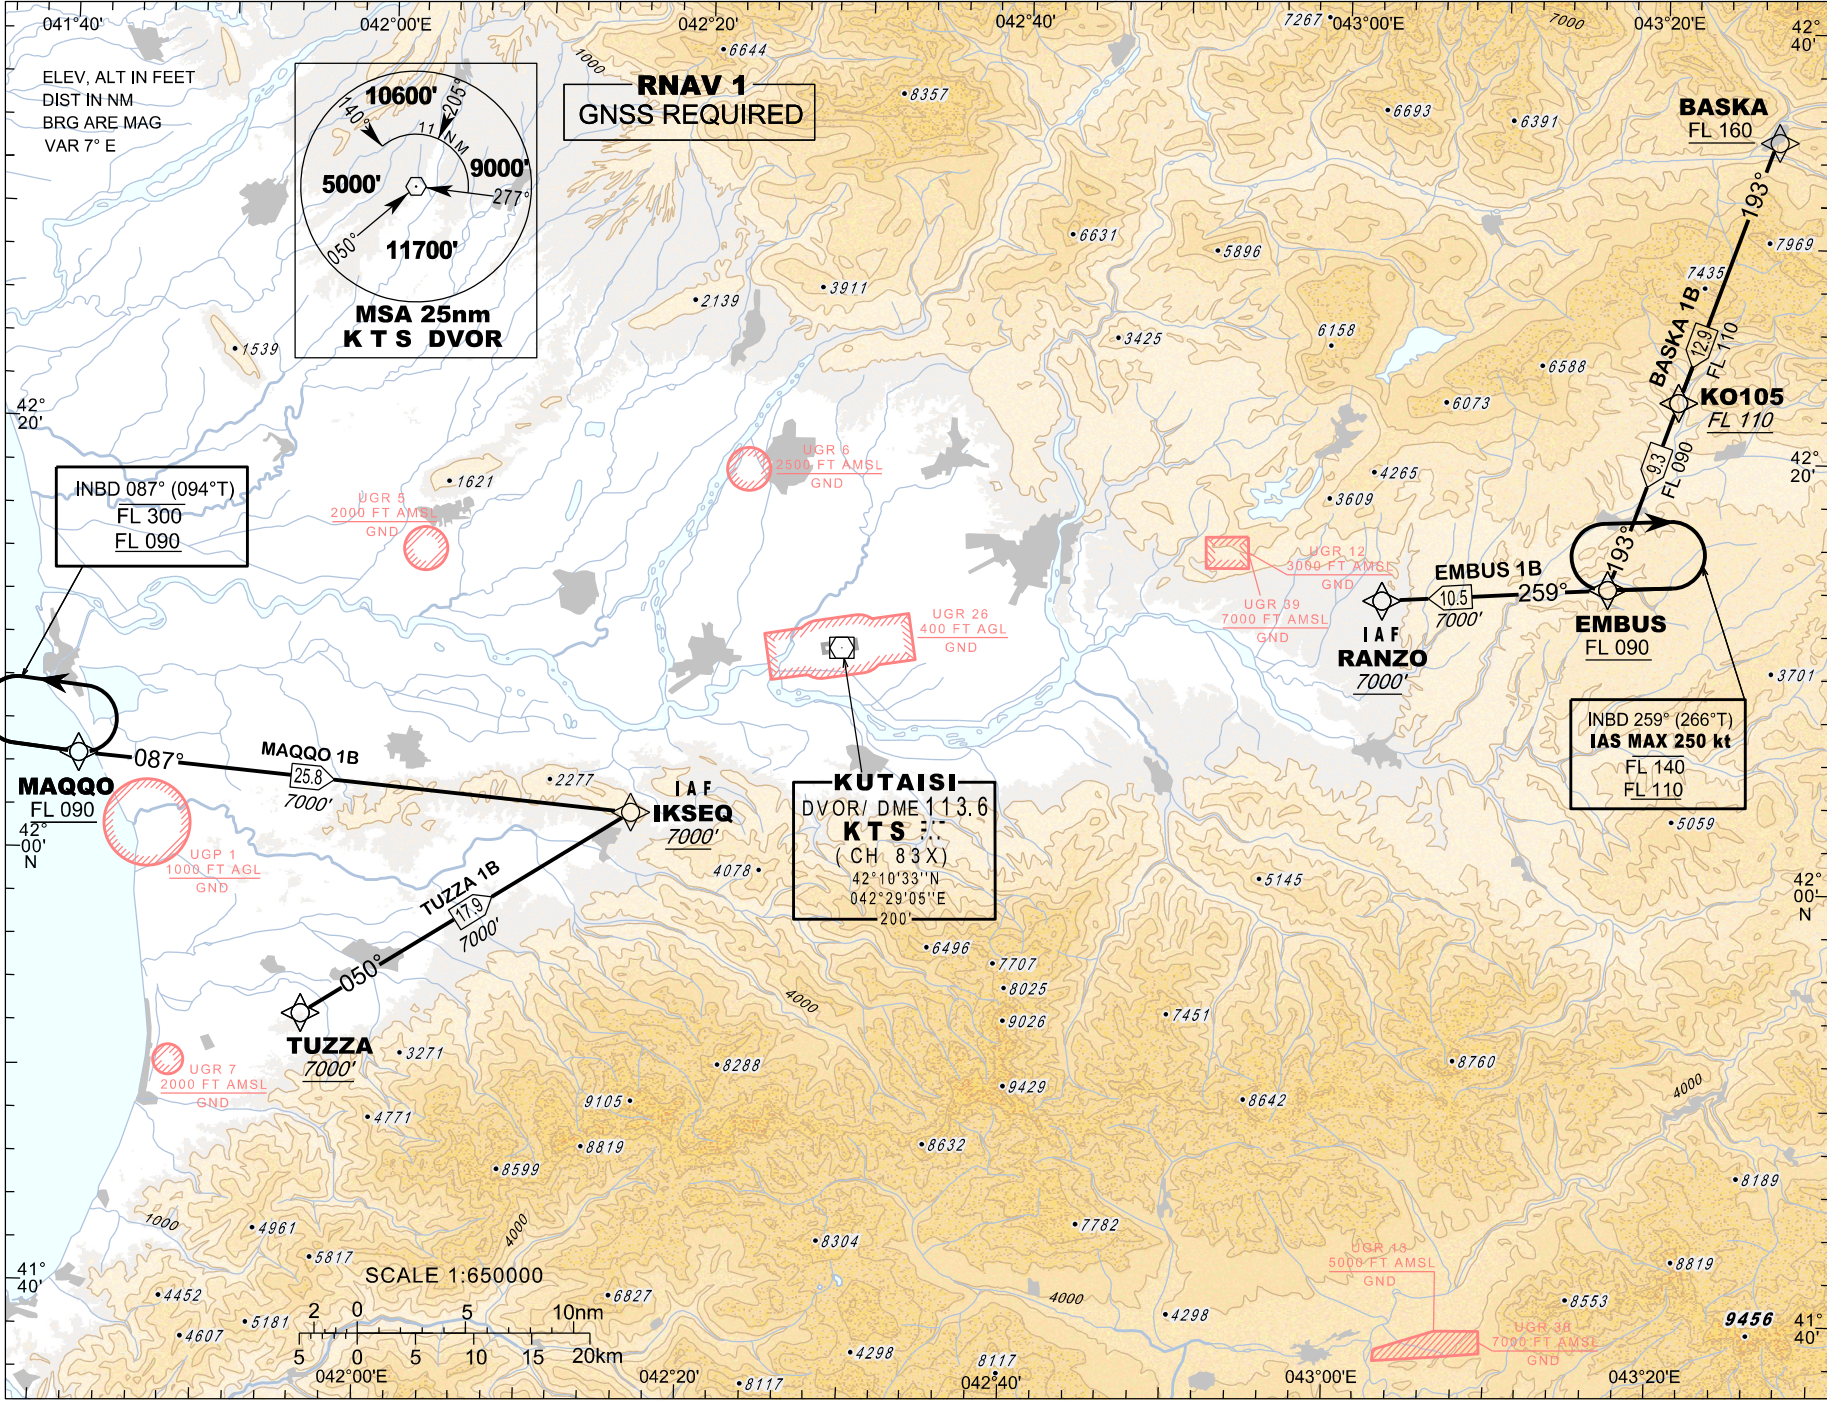

PAGE INTENTIONALLY LEFT BLANK

STANDARD ARRIVAL ROUTES - RNAV (GNSS) INSTRUMENT - RWY 25

RNAV 1 STAR Coding Table of BASKA 1B										
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification	
	Identifier	Flyover	Coordinates				Level	Speed kt		
IF	BASKA	-	42°34'59.0"N 043°26'55.0"E	-	-	-	+FL160	-	RNAV1	
TF	KO105	-	42°22'51.0"N 043°21'03.0"E	193° (199.7°)	12.9	-	+FL110	-	RNAV1	
TF	EMBUS	-	42°14'06.0"N 043°16'50.0"E	193° (199.6°)	9.3	-	+FL090	-	RNAV1	
TF	RANZO	-	42°13'23.0"N 043°02'44.0"E	259° (266.2°)	10.5	-	+A7000	-	RNAV1	

RNAV 1 STAR Coding Table of EMBUS 1B										
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification	
	Identifier	Flyover	Coordinates				Level	Speed kt		
IF	EMBUS	-	42°14'06.0"N 043°16'50.0"E	-		-	+FL090	-	RNAV1	
TF	RANZO	-	42°13'23.0"N 043°02'44.0"E	259° (266.2°)	10.5	-	+A7000	-	RNAV1	


RNAV 1 STAR Coding Table of MAQQO 1B										
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification	
	Identifier	Flyover	Coordinates				Level	Speed kt		
IF	MAQQO	-	42°04'32.0"N 041°41'44.0"E	-	-	-	+FL090	-	RNAV1	
TF	IKSEQ	-	42°02'37.0"N 042°16'14.0"E	087° (094.1°)	25.8	-	+A7000	-	RNAV1	

RNAV 1 STAR Coding Table of TUZZA 1B										
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification	
	Identifier	Flyover	Coordinates				Level	Speed kt		
IF	TUZZA	-	41°52'48.0"N 041°56'06.0"E	-	-	-	+A7000	-	RNAV1	
TF	IKSEQ	-	42°02'37.0"N 042°16'14.0"E	050° (056.6°)	17.9	-	+A7000	-	RNAV1	

RNAV Holding Coding Tables								
Fix Identifier	Inbound course °MAG(°True)	Time (min)	Turn Direction	Min alt.	Max alt.	Speed limit (kt)	Mag. VAR	Navigation Specification
MAQQO	087° (094.0°)	1.5*	L	FL090	FL300	280	-7°	RNAV1
EMBUS	259° (266.0°)	1.0	R	FL110	FL140	250	-7°	RNAV1

* 1.0 min at or below FL140

PAGE INTENTIONALLY LEFT BLANK

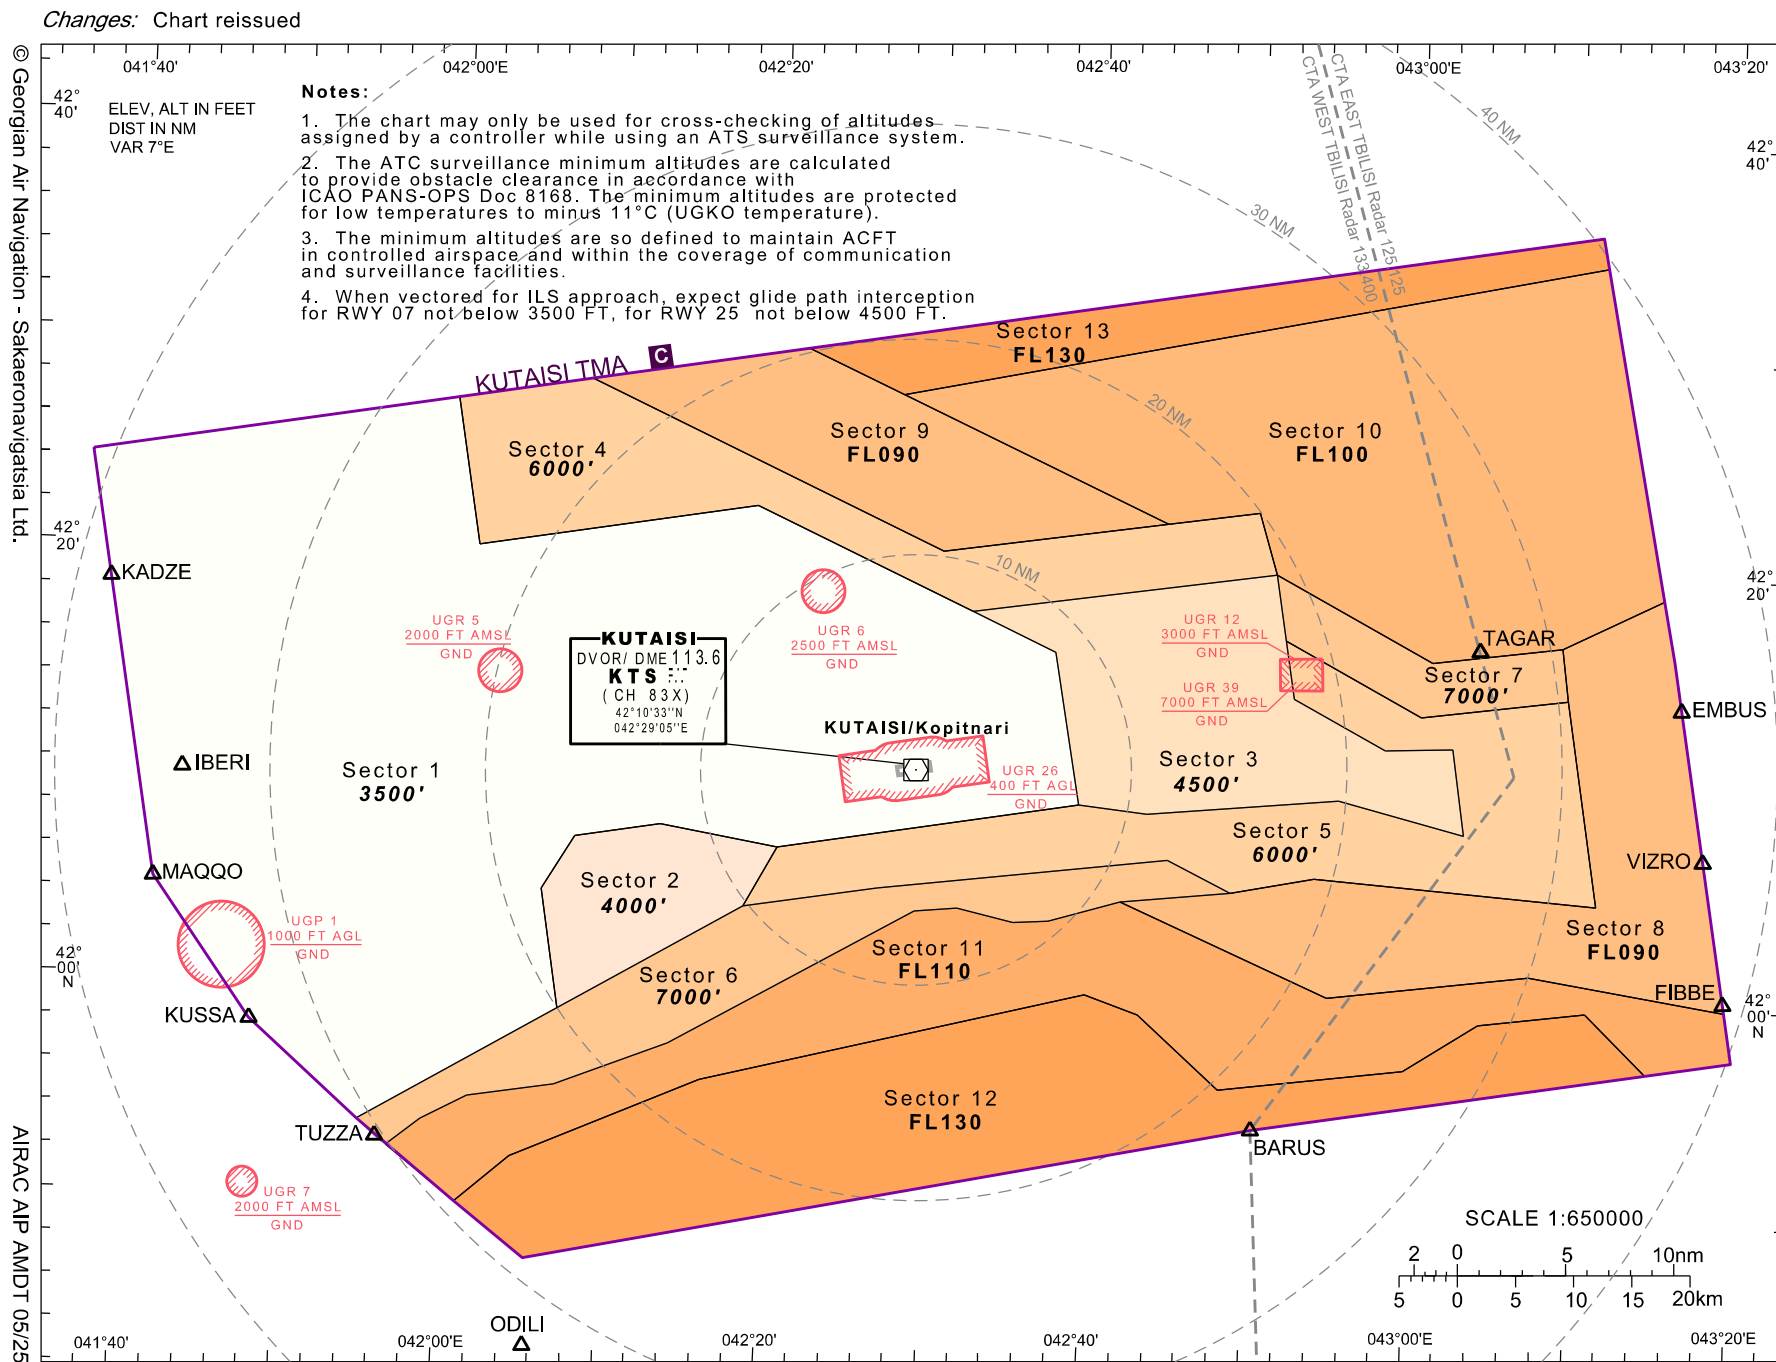**ATC SURVEILLANCE MINIMUM
ALTITUDE CHART - ICAO**AERODROME ELEV 160'
TRANSITION ALTITUDE 7000'APP 127.1
TWR 125.5**KUTAISI/Kopitnari (UGKO)**

PAGE INTENTIONALLY LEFT BLANK

ATC Surveillance Minimum Altitude Sectors' Coordinates

Sector	Lateral limits
Sector 1	422413N 0413700E - 422712N 0415948E - 422024N 0420123E - 422237N 0421844E - 421800N 0423222E - 421613N 0423737E - 420908N 0423918E - 420648N 0422033E - 420742N 0421314E - 420701N 0420755E - 420432N 0420557E - 415900N 0420711E - 415334N 0415456E - 415803N 0414800E - 420432N 0414143E - 422413N 0413700E
Sector 2	415900N 0420711E - 420432N 0420557E - 420701N 0420755E - 420742N 0421314E - 420648N 0422033E - 420401N 0421833E - 415900N 0420711E
Sector 3	421800N 0423222E - 421831N 0423703E - 422004N 0425120E - 421701N 0425200E - 421419N 0425236E - 421202N 0425821E - 421208N 0430235E - 420808N 0430321E - 420938N 0425531E - 420848N 0424334E - 420908N 0423918E - 421613N 0423737E - 421800N 0423222E
Sector 4	422712N 0415948E - 422817N 0420808E - 422046N 0423027E - 422218N 0424428E - 422255N 0425011E - 422004N 0425120E - 421831N 0423703E - 421800N 0423222E - 422237N 0421844E - 422024N 0420123E - 422712N 0415948E
Sector 5	420648N 0422033E - 420908N 0423918E - 420848N 0424334E - 420938N 0425531E - 420808N 0430321E - 421208N 0430235E - 421202N 0425821E - 421419N 0425236E - 421701N 0425200E - 421336N 0430034E - 421429N 0430943E - 420457N 0431142E - 420559N 0425406E - 420513N 0424854E - 420641N 0424455E - 420502N 0422653E - 420401N 0421833E - 420648N 0422033E
Sector 6	415334N 0415456E - 415900N 0420711E - 420401N 0421833E - 420502N 0422653E - 420641N 0424455E - 420513N 0424854E - 420441N 0424202E - 420343N 0423735E - 420337N 0423523E - 420412N 0423153E - 420401N 0422914E - 415732N 0421407E - 415528N 0420706E - 415448N 0420145E - 415339N 0415854E - 415223N 0415648E - 415248N 0415606E - 415334N 0415456E
Sector 7	422004N 0425120E - 421608N 0430113E - 421655N 0430919E - 421429N 0430943E - 421336N 0430034E - 421701N 0425200E - 422004N 0425120E
Sector 8	420441N 0424202E - 420513N 0424854E - 420559N 0425406E - 420457N 0431142E - 421429N 0430943E - 421655N 0430919E - 421913N 0431538E - 421623N 0431621E - 420007N 0431948E - 420138N 0430735E - 420028N 0425503E - 420441N 0424202E
Sector 9	422817N 0420808E - 422959N 0422139E - 422758N 0422741E - 422218N 0424428E - 422046N 0423027E - 422817N 0420808E
Sector 10	422758N 0422741E - 423437N 0431144E - 421913N 0431538E - 421655N 0430919E - 421608N 0430113E - 422004N 0425120E - 422255N 0425011E - 422218N 0424428E - 422758N 0422741E
Sector 11	415223N 0415648E - 415339N 0415854E - 415448N 0420145E - 415528N 0420706E - 415732N 0421407E - 420401N 0422914E - 420412N 0423153E - 420337N 0423523E - 420343N 0423735E - 420441N 0424202E - 420028N 0425503E - 420138N 0430735E - 420007N 0431948E - 415748N 0432017E - 415711N 0431458E - 415958N 0431109E - 415921N 0430431E - 415709N 0425953E - 415604N 0424825E - 415928N 0424318E - 420020N 0423958E - 415554N 0421610E - 415204N 0420430E - 414953N 0420110E - 415223N 0415648E
Sector 12	414953N 0420110E - 415204N 0420430E - 415554N 0421610E - 420020N 0423958E - 415928N 0424318E - 415604N 0424825E - 415709N 0425953E - 415921N 0430431E - 415958N 0431109E - 415711N 0431458E - 415414N 0425030E - 414721N 0420533E - 414953N 0420110E
Sector 13	422959N 0422139E - 423602N 0431122E - 423437N 0431144E - 422758N 0422741E - 422959N 0422139E

PAGE INTENTIONALLY LEFT BLANK

**INSTRUMENT
APPROACH
CHART - ICAO**


AERODROME ELEV 160'

HEIGHTS RELATED TO
THR RWY 07 - ELEV 133'

TRANSITION ALT 7000'

APP 127.100

TWR 125.500

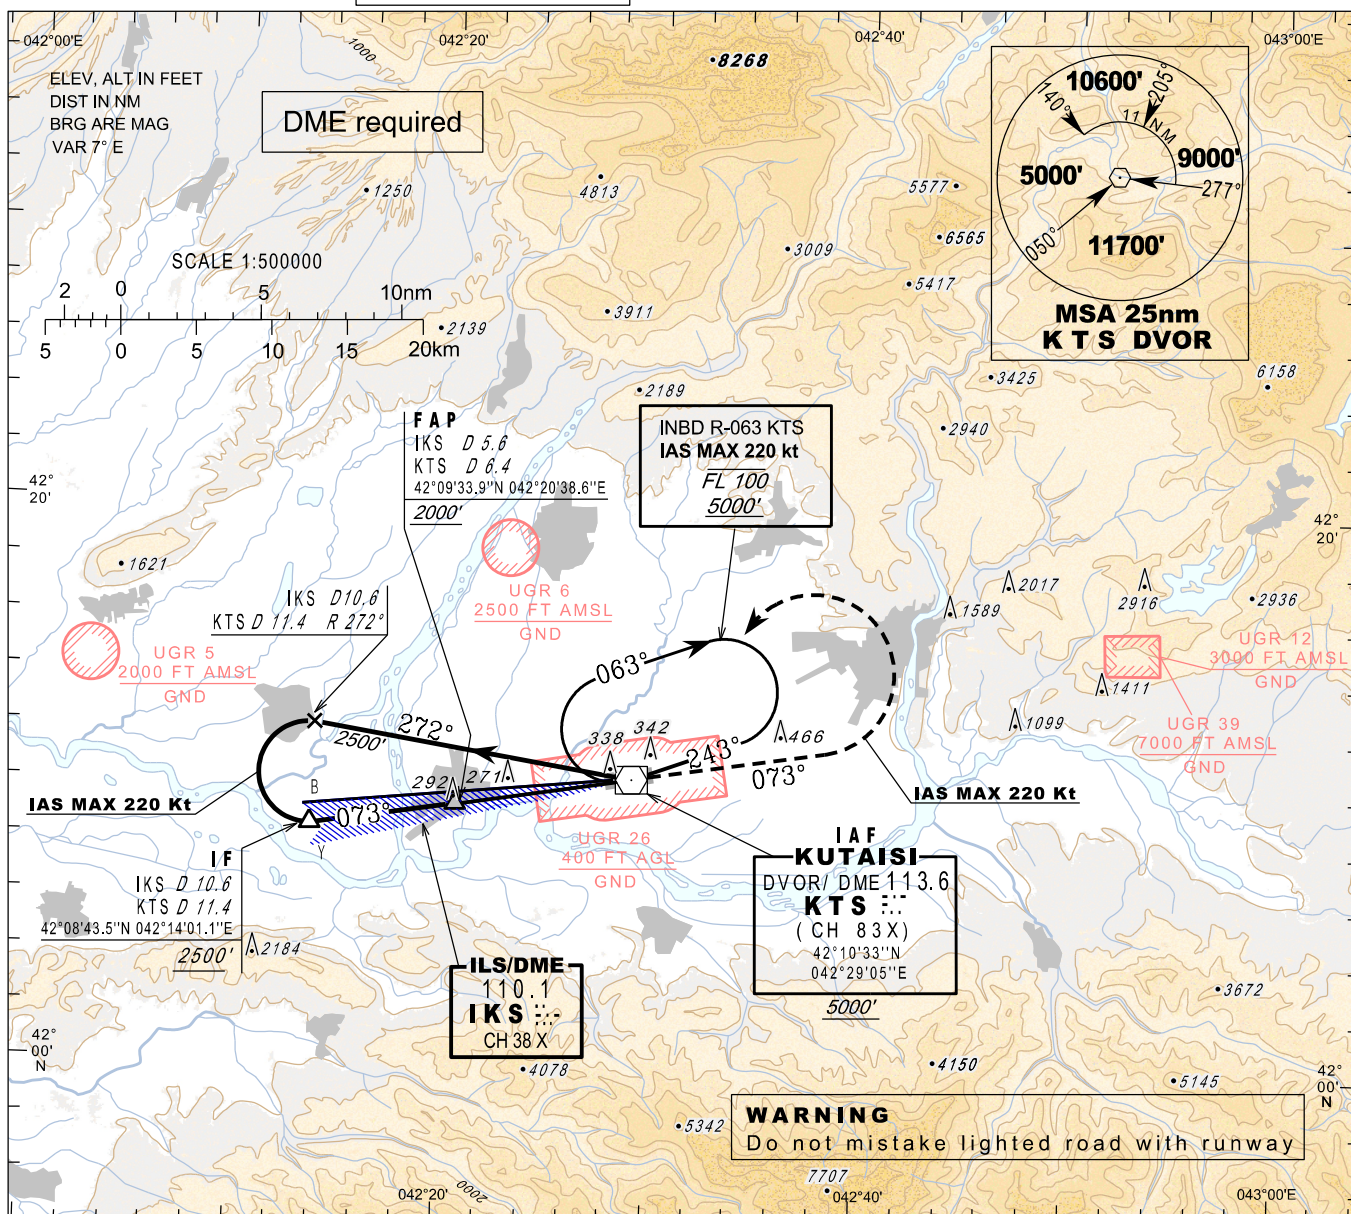KUTAIISI/Kopitnari (UGKO)**ILSy
RWY 07****MISSED APPROACH****Normal:**


Climb straight ahead to 3500', at 7 NM DME KTS (7.4 NM DME IKS)
turn left inbound KTS and follow ATC instructions.
IAS MAX 220kt

KTS DVOR Unserviceable:

Climb straight ahead to 3500', at 7 NM DME KTS (7.4 NM DME IKS)
turn left heading 255°, expect vectoring.
IAS MAX 220kt

Radio Communication Failure:

Climb straight ahead to 5000', at 7 NM DME KTS (7.4 NM DME IKS)
turn left inbound KTS, hold as published, when ready
make new approach (ILS y or LOC y or VOR).
IAS MAX 220kt

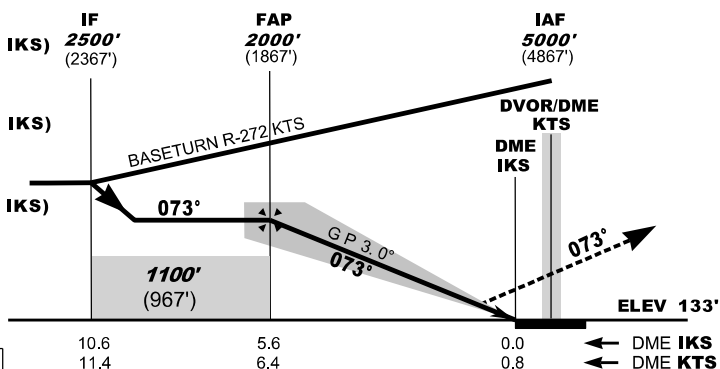

Straight-in Approach	A	B	C	D
OCA(H)	311 (178)	321 (188)	331 (198)	341 (208)

DME IKS NM	5	4	3	2	1
DME KTS NM	5.8	4.8	3.8	2.8	1.8
ALT (HGT) ft	1798 (1665)	1472 (1339)	1147 (1014)	824 (691)	503 (370)

ILS RDH 51'

Changes: Chart reissued

PAGE INTENTIONALLY LEFT BLANK

**INSTRUMENT
APPROACH
CHART - ICAO**


AERODROME ELEV 160'

HEIGHTS RELATED TO
THR RWY 07 - ELEV 133'

TRANSITION ALT 7000'

APP 127.100

TWR 125.500

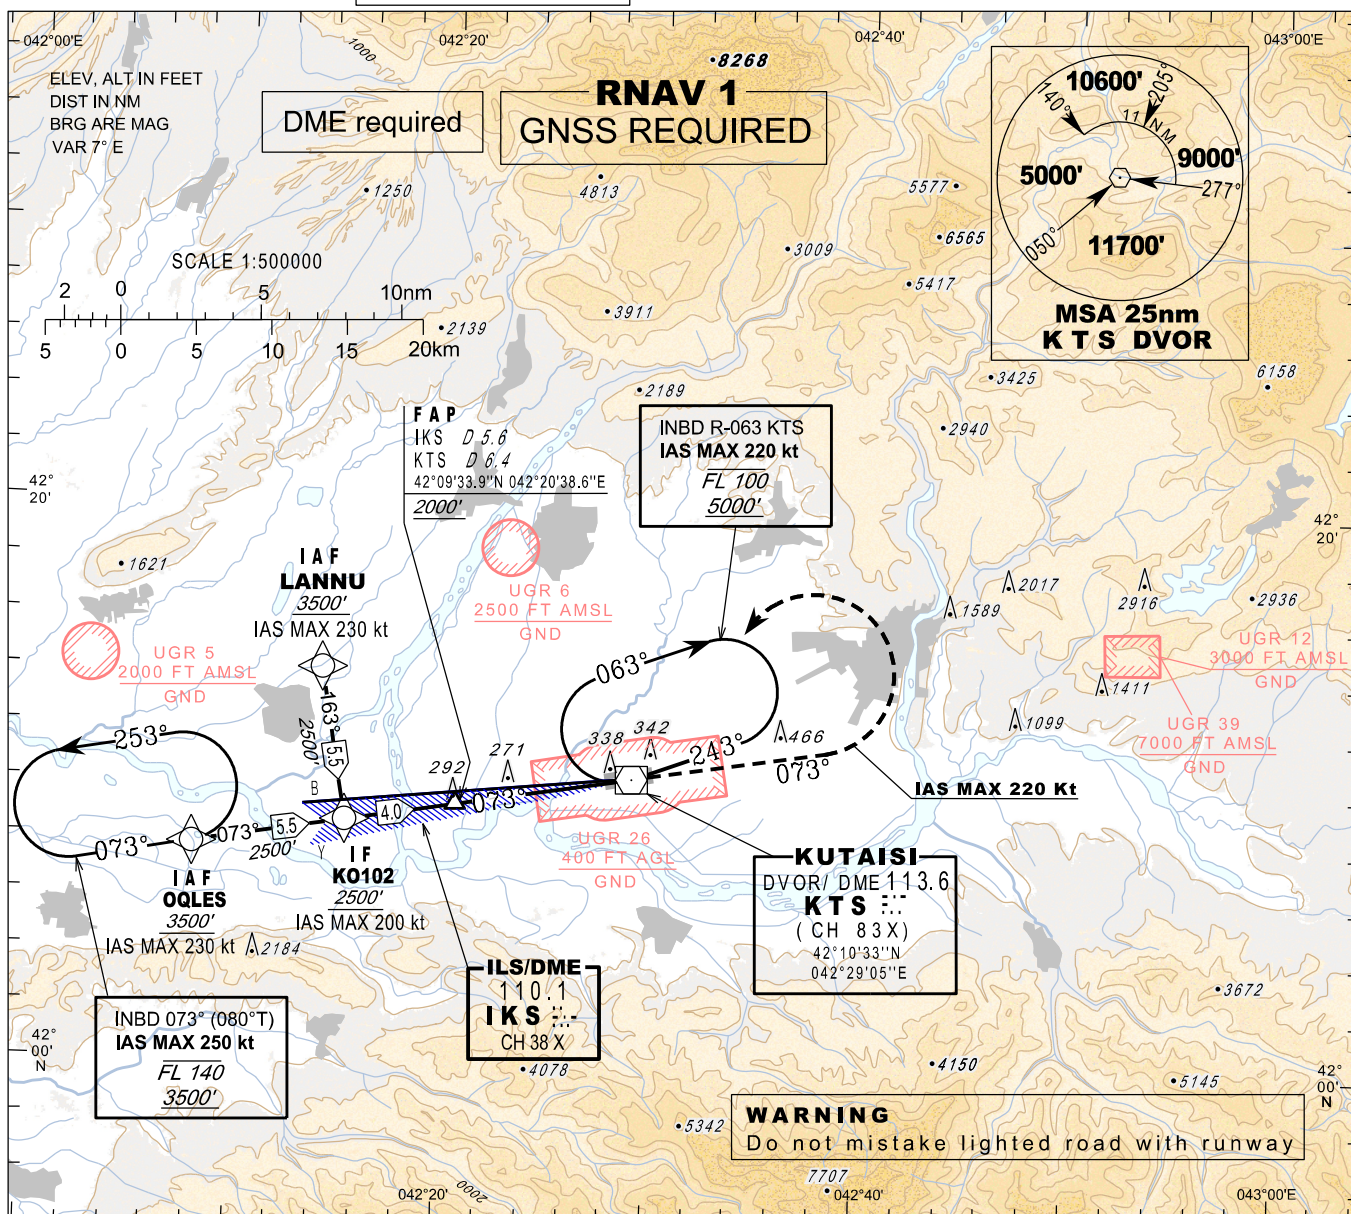KUTAIISI/Kopitnari (UGKO)**ILS
RWY 07****MISSED APPROACH**


Normal:
Climb straight ahead to 3500', at 7 NM DME KTS (7.4 NM DME IKS)
turn left inbound KTS and follow ATC instructions.
IAS MAX 220kt

KTS DVOR Unserviceable:
Climb straight ahead to 3500', at 7 NM DME KTS (7.4 NM DME IKS)
turn left heading 255°, expect vectoring.
IAS MAX 220kt

Radio Communication Failure:
Climb straight ahead to 5000', at 7 NM DME KTS (7.4 NM DME IKS)
turn left inbound KTS, hold as published, when ready
make new approach (ILS y or LOC y or VOR).
IAS MAX 220kt

Straight-in Approach	A	B	C	D
OCA(H)	311 (178)	321 (188)	331 (198)	341 (208)

DME IKS NM	5	4	3	2	1
DME KTS NM	5.8	4.8	3.8	2.8	1.8
ALT (HGT) ft	1798 (1665)	1472 (1339)	1147 (1014)	824 (691)	503 (370)

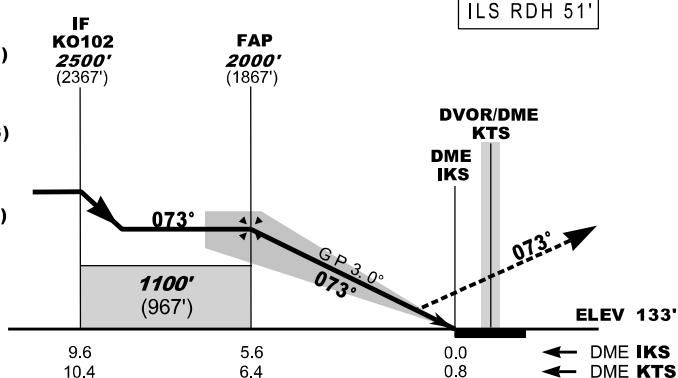

Changes: Chart reissued

PAGE INTENTIONALLY LEFT BLANK

RNAV Transition Coding Tables - RWY 07 ILSz

LANNU transition										
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification	
	Identifier	Flyover	Coordinates				Level	Speed kt		
IF	LANNU	-	42°14'19.0"N 042°14'06.0"E	-	-	-	+A3500	-230	RNAV1	
TF	KO102	-	42°08'53.6"N 042°15'20.6"E	163° (170.3°)	5.5	-	+A2500	-200	RNAV1	

OQLES transition										
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification	
	Identifier	Flyover	Coordinates				Level	Speed kt		
IF	OQLES	-	42°07'58.0"N 042°08'03.0"E	-	-	-	+A3500	-230	RNAV1	
TF	KO102	-	42°08'53.6"N 042°15'20.6"E	073° (080.2°)	5.5	-	+A2500	-200	RNAV1	

RNAV Holding Coding Table								
Fix Identifier	Inbound course °MAG(°True)	Time (min)	Turn Direction	Min alt.	Max alt.	Speed limit (kt)	Mag. VAR	Navigation Specification
OQLES	073° (080.0°)	1.0	L	A3500	FL140	250	-7°	RNAV1

PAGE INTENTIONALLY LEFT BLANK



INSTRUMENT
APPROACH
CHART - ICAO

AERODROME ELEV 160'
HEIGHTS RELATED TO
THR RWY 07 - ELEV 133'
TRANSITION ALT 7000'

APP 127.100
TWR 125.500

KUTAIISI/Kopitnari (UGKO)

LOCy
RWY 07

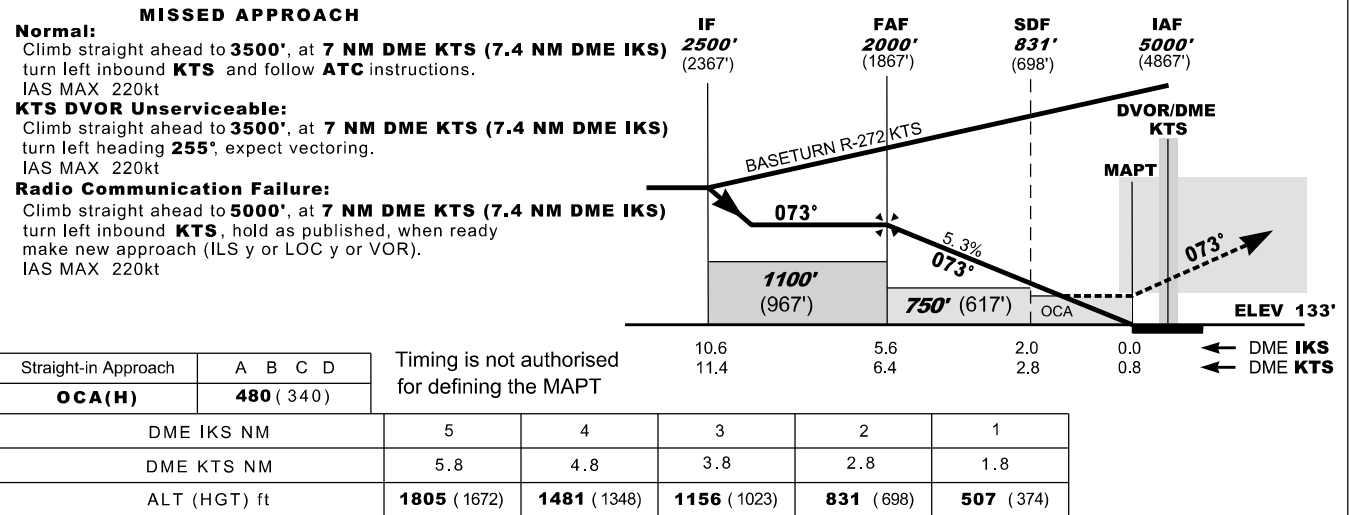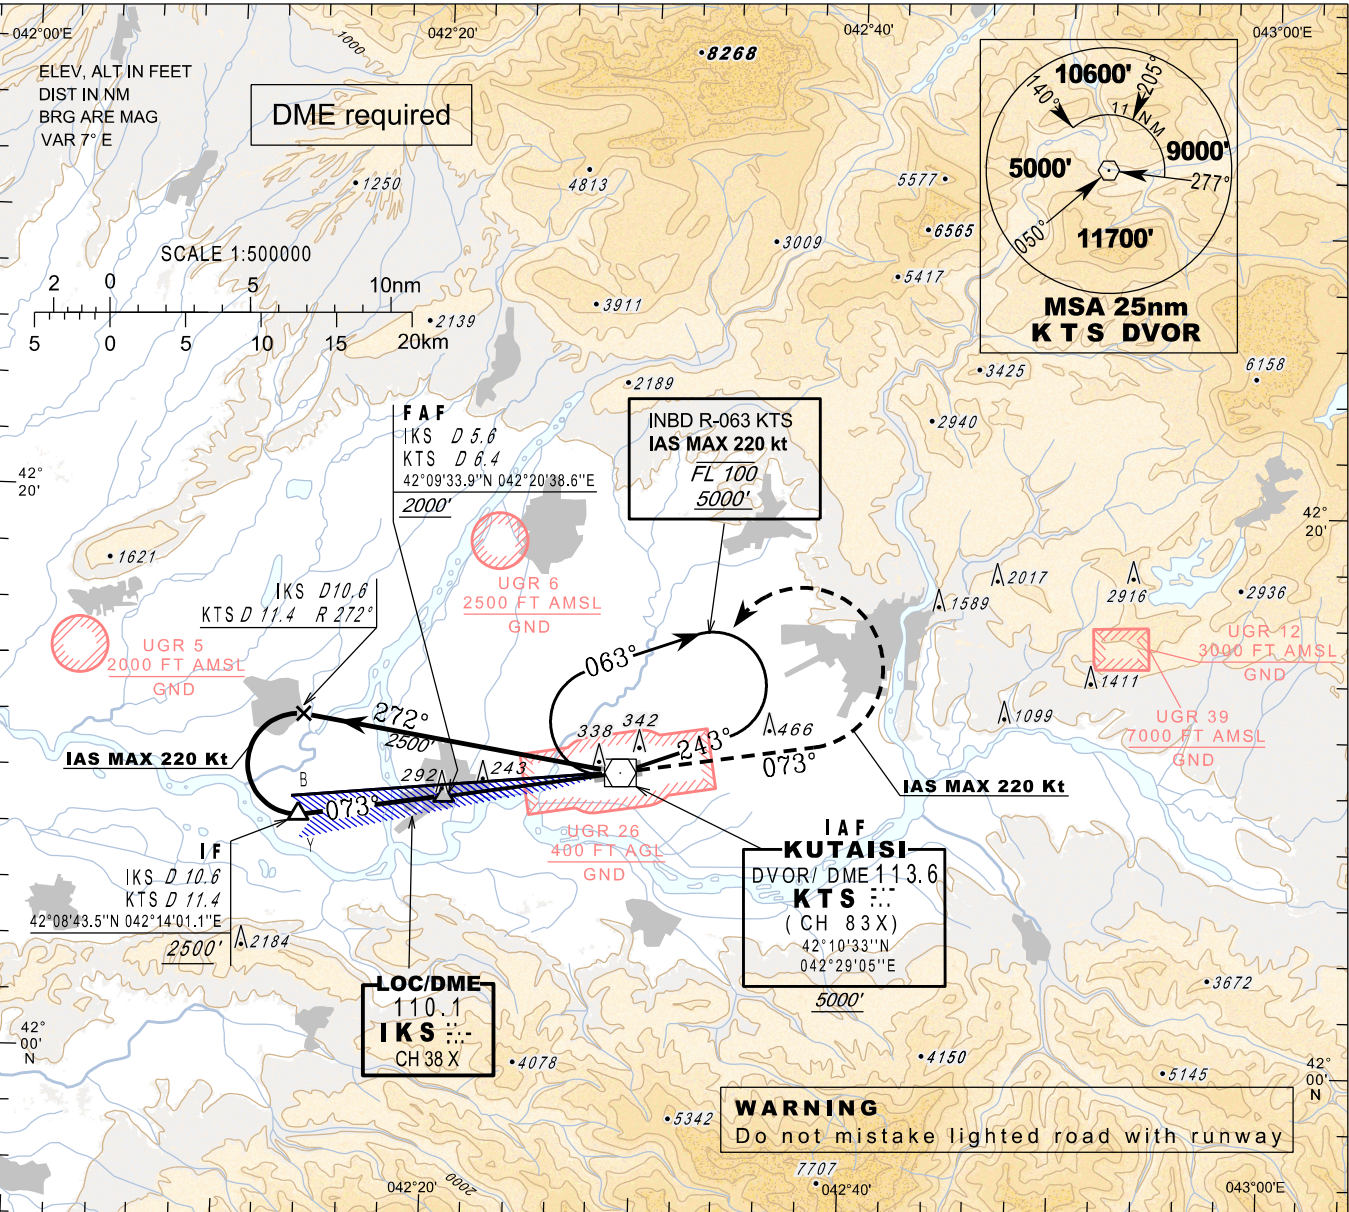


PAGE INTENTIONALLY LEFT BLANK

**INSTRUMENT
APPROACH
CHART - ICAO**

AERODROME ELEV 160'

HEIGHTS RELATED TO
THR RWY 07 - ELEV 133'

TRANSITION ALT 7000'

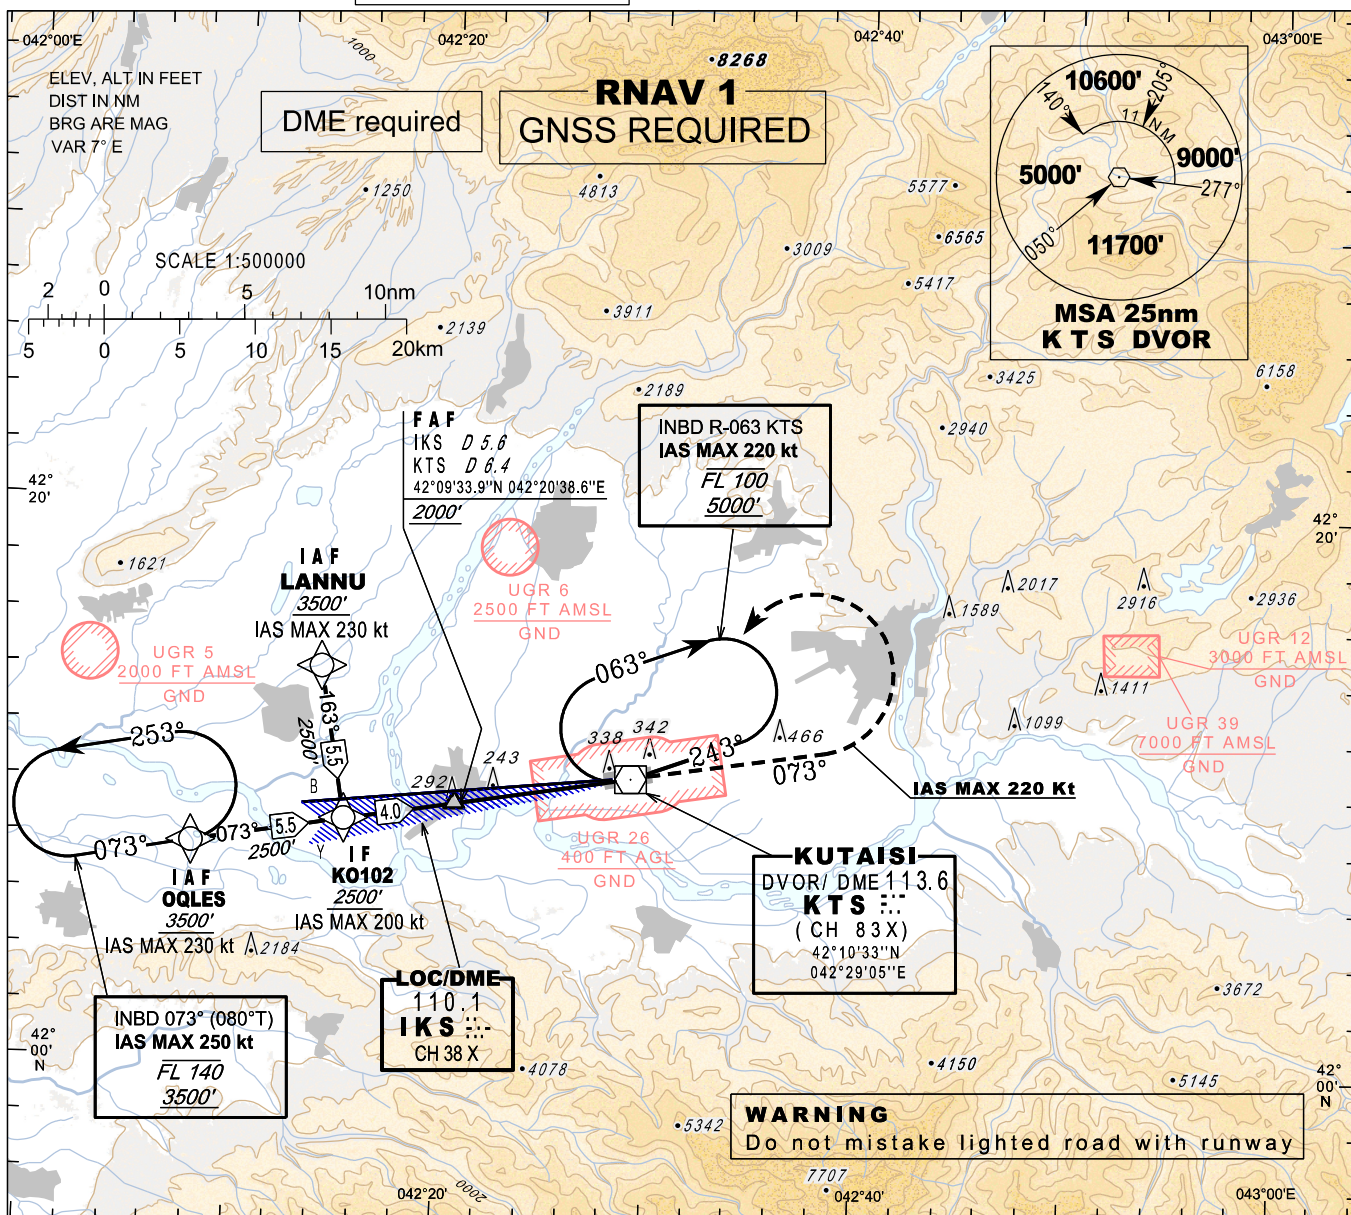APP 127.100
TWR 125.500**KUTAISI/Kopitnari (UGKO)****LOCz
RWY 07****MISSED APPROACH****Normal:**


Climb straight ahead to **3500'**, at **7 NM DME KTS (7.4 NM DME IKS)**
turn left inbound **KTS** and follow **ATC** instructions.
IAS MAX 220kt

KTS DVOR Unserviceable:

Climb straight ahead to **3500'**, at **7 NM DME KTS (7.4 NM DME IKS)**
turn left heading **255°**, expect vectoring.
IAS MAX 220kt

Radio Communication Failure:

Climb straight ahead to **5000'**, at **7 NM DME KTS (7.4 NM DME IKS)**
turn left inbound **KTS**, hold as published, when ready
make new approach (ILS y or LOC y or VOR).
IAS MAX 220kt

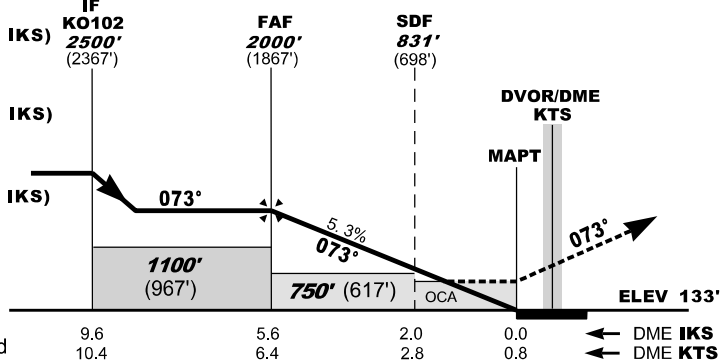

Straight-in Approach	A	B	C	D
OCA(H)	480	(340)		

Timing is not authorised
for defining the MAPT

DME IKS NM	5	4	3	2	1
DME KTS NM	5.8	4.8	3.8	2.8	1.8
ALT (HGT) ft	1805 (1672)	1481 (1348)	1156 (1023)	831 (698)	507 (374)

PAGE INTENTIONALLY LEFT BLANK

RNAV Transition Coding Tables - RWY 07 LOCz

LANNU transition										
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification	
	Identifier	Flyover	Coordinates				Level	Speed kt		
IF	LANNU	-	42°14'19.0"N 042°14'06.0"E	-	-	-	+A3500	-230	RNAV1	
TF	KO102	-	42°08'53.6"N 042°15'20.6"E	163° (170.3°)	5.5	-	+A2500	-200	RNAV1	

OQLES transition										
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification	
	Identifier	Flyover	Coordinates				Level	Speed kt		
IF	OQLES	-	42°07'58.0"N 042°08'03.0"E	-	-	-	+A3500	-230	RNAV1	
TF	KO102	-	42°08'53.6"N 042°15'20.6"E	073° (080.2°)	5.5	-	+A2500	-200	RNAV1	

RNAV Holding Coding Table								
Fix Identifier	Inbound course °MAG(°True)	Time (min)	Turn Direction	Min alt.	Max alt.	Speed limit (kt)	Mag. VAR	Navigation Specification
OQLES	073° (080.0°)	1.0	L	A3500	FL140	250	-7°	RNAV1

PAGE INTENTIONALLY LEFT BLANK

**INSTRUMENT
APPROACH
CHART - ICAO**



AERODROME ELEV 160'

HEIGHTS RELATED TO
THR RWY 25 - ELEV 160'

TRANSITION ALT 7000'

APP 127.100

TWR 125.500

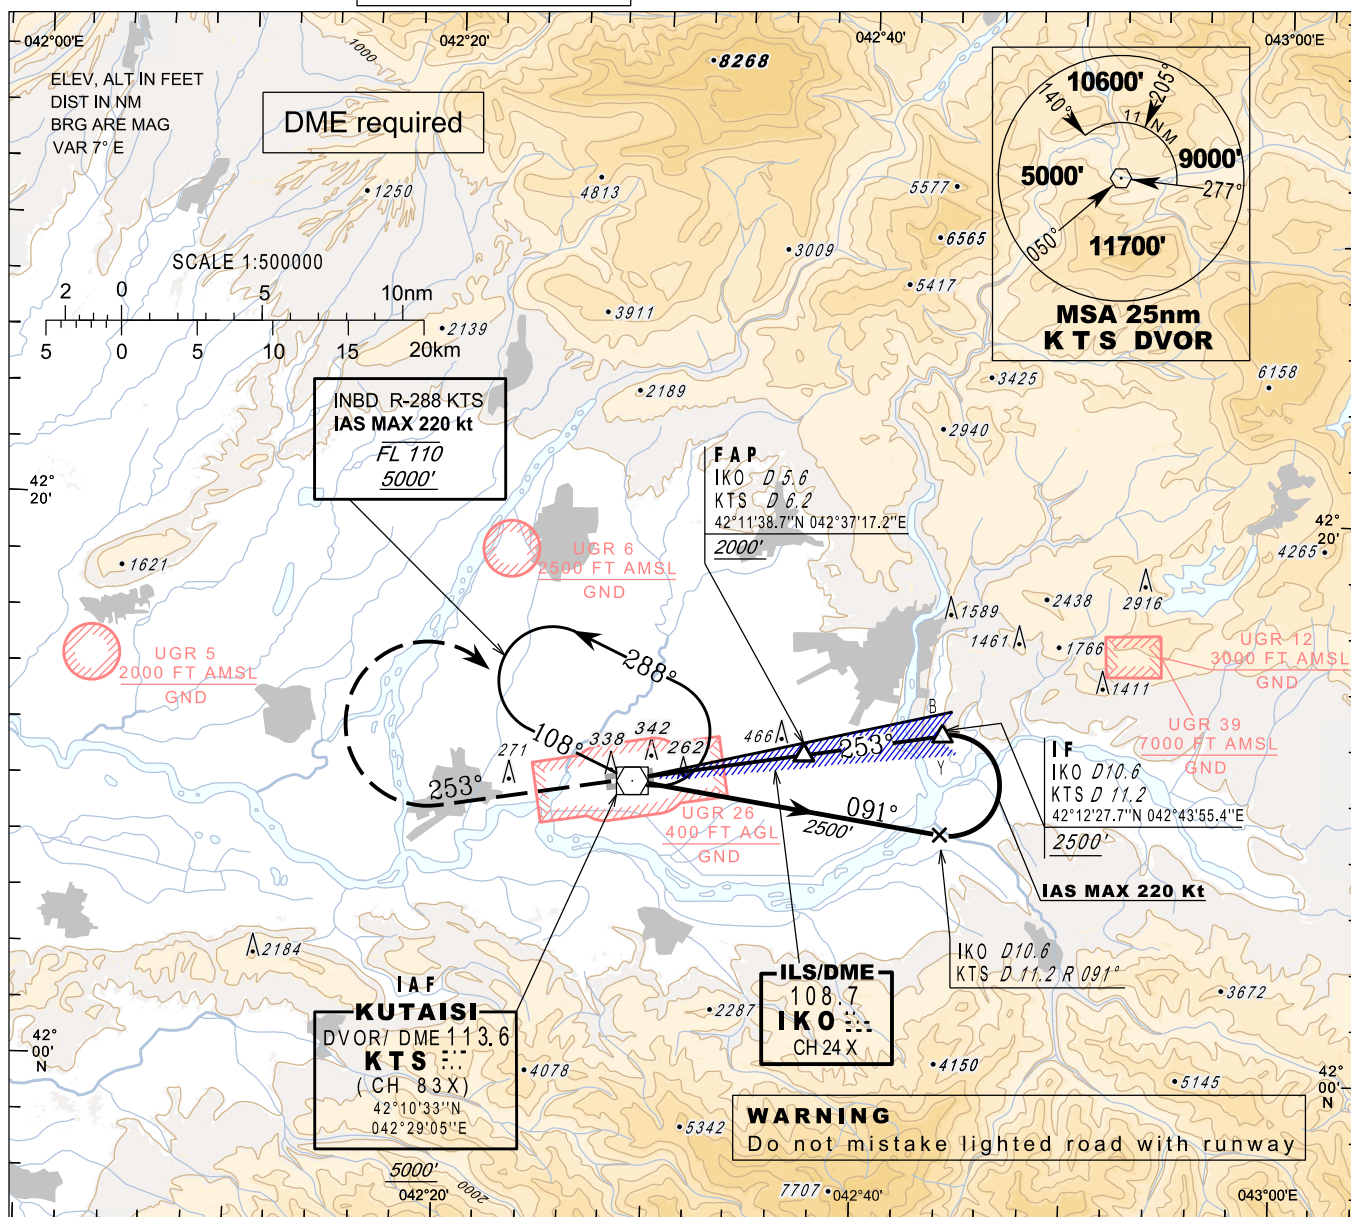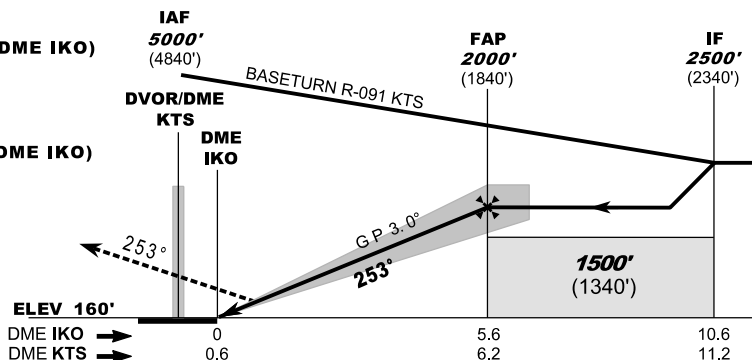KUTAIISI/Kopitnari (UGKO)**ILSy
RWY 25****MISSED APPROACH****Normal:**Climb straight ahead to **3500'**, at **7 NM DME KTS (7.2 NM DME IKO)** turn right inbound **KTS** and follow **ATC** instructions.**KTS DVOR Unserviceable:**Climb straight ahead to **4500'**, expect vectoring.**Radio Communication Failure:**Climb straight ahead to **5000'**, at **7 NM DME KTS (7.2 NM DME IKO)** turn right inbound **KTS**, hold as published, when ready make new approach (ILSy or LOCy or VOR).

Straight-in Approach	A	B	C	D
OCA(H)	330 (170)	340 (180)	350 (190)	360 (200)

DME IKO NM	5	4	3	2	1
DME KTS NM	5.6	4.6	3.6	2.6	1.6
ALT (HGT) ft	1825 (1665)	1499 (1339)	1174 (1014)	851 (691)	530 (370)

Changes: Obstacle elevation corrected

PAGE INTENTIONALLY LEFT BLANK

INSTRUMENT
APPROACH
CHART - ICAO

AERODROME ELEV 160'
HEIGHTS RELATED TO
THR RWY 25 - ELEV 160'

APP 127.100
TWR 125.500

KUTAISI/Kopitnari (UGKO)

ILS-
RWY 25

MISSED APPROACH

Normal:
Climb straight ahead to **3500'**, at **7 NM DME KTS (7.2 NM DME IKO)** turn right inbound **KTS** and follow **ATC** instructions.

KTS DVOR Unserviceable:
Climb straight ahead to **4500'**, expect vectoring.

Radio Communication Failure:
Climb straight ahead to **5000'**, at **7 NM DME KTS (7.2 NM DME IKO)** turn right inbound **KTS**, hold as published, when ready make new approach (ILS or LOC or VOR).

ILS RDH 51'

DVOR/DME KTS DME IKO

FAP 2000' (1840')

IF KO107 2500' (2340')

ELEV 160'

DME IKO 0

DME KTS 0.6

GP 3.0° 253°

1500' (1340')

0 5.6 6.2 9.6 10.2

Straight-in Approach	A	B	C	D
OCA(H)	330 (170)	340 (180)	350 (190)	360 (200)
DME IKO NM		5	4	3
DME KTS NM		5.6	4.6	3.6
ALT (HGT) ft		1825 (1665)	1499 (1339)	1174 (1014)

© Georgian Air Navigation - Sakaeronavigatsia Ltd.

AIRAC AIP AMDT 05/25

PAGE INTENTIONALLY LEFT BLANK

RNAV Transition Coding Tables - RWY 25 ILSz

IKSEQ transition										
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification	
	Identifier	Flyover	Coordinates				Level	Speed kt		
IF	IKSEQ	-	42°02'37.0"N 042°16'14.0"E	-	-	-	+A7000	-	RNAV1	
TF	KO103	-	42°04'15.0"N 042°26'45.0"E	071° (078.1°)	8.0	-	+A6000	-	RNAV1	
TF	KO104	-	42°06'52.0"N 042°43'48.0"E	071° (078.2°)	13.0	-	+A3500	-230	RNAV1	
TF	KO107	-	42°12'18.0"N 042°42'36.0"E	344° (350.7°)	5.5	-	+A2500	-200	RNAV1	

RANZO transition										
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification	
	Identifier	Flyover	Coordinates				Level	Speed kt		
IF	RANZO	-	42°13'23.0"N 043°02'44.0"E	-	-	-	+A7000	-	RNAV1	
TF	LAGGI	-	42°12'47.0"N 042°51'30.0"E	259° (265.9°)	8.4	-	+A4500	-	RNAV1	
TF	KO107	-	42°12'18.0"N 042°42'36.0"E	259° (265.9°)	6.6	-	+A2500	-200	RNAV1	

PAGE INTENTIONALLY LEFT BLANK

**INSTRUMENT
APPROACH
CHART - ICAO**



AERODROME ELEV 160'

HEIGHTS RELATED TO
THR RWY 25 - ELEV 160'

TRANSITION ALT 7000'

APP 127.100

TWR 125.500

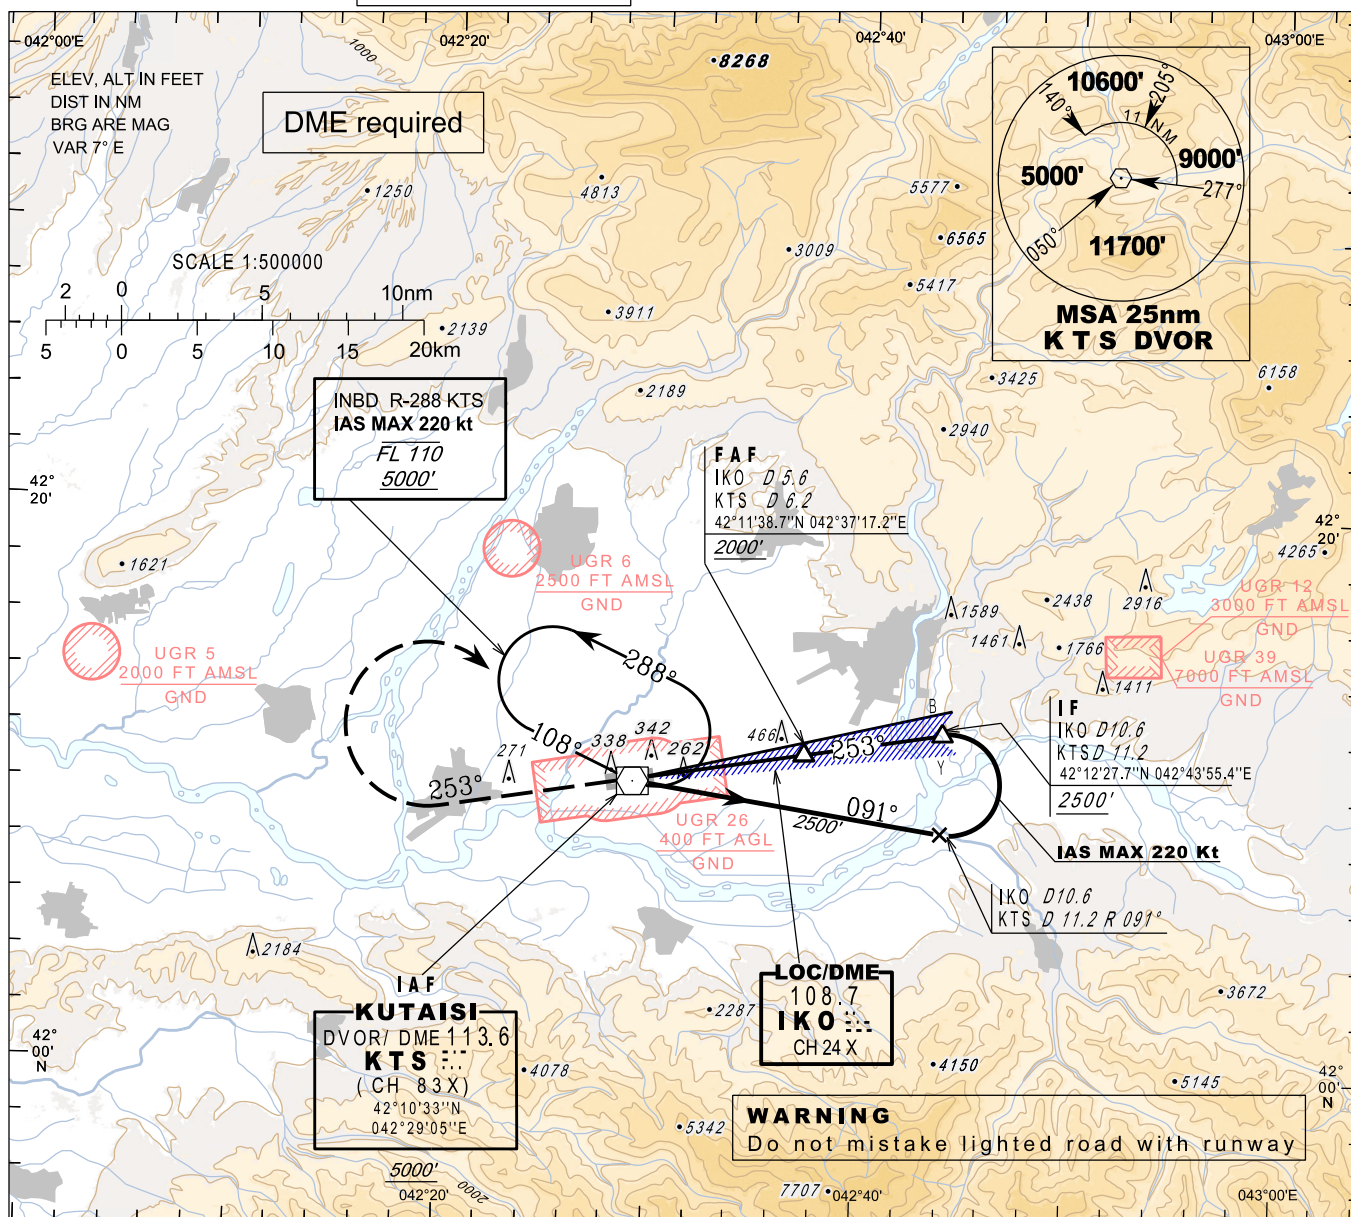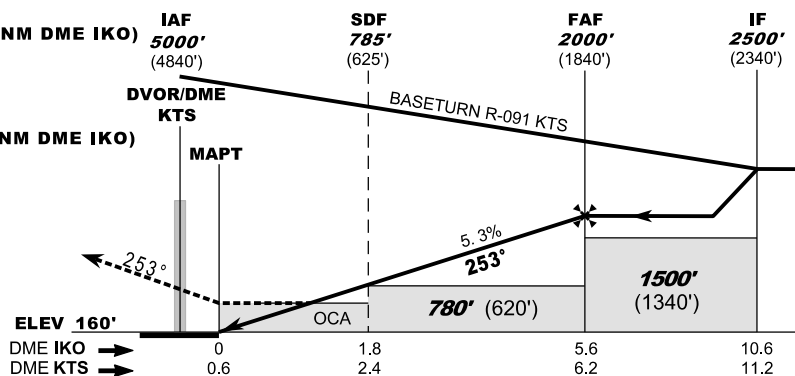KUTAIISI/Kopitnari (UGKO)**LOCy
RWY 25****MISSED APPROACH****Normal:**Climb straight ahead to **3500'**, at **7 NM DME KTS (7.2 NM DME IKO)** turn right inbound **KTS** and follow **ATC** instructions.**KTS DVOR Unserviceable:**Climb straight ahead to **4500'**, expect vectoring.**Radio Communication Failure:**Climb straight ahead to **5000'**, at **7 NM DME KTS (7.2 NM DME IKO)** turn right inbound **KTS**, hold as published, when ready make new approach (ILSy or LOCy or VOR).Timing is not authorised
for defining the MAPT



Straight-in Approach	A	B	C	D
OCA(H)	510	(350)		

DME IKO NM	5	4	3	2	1
DME KTS NM	5.6	4.6	3.6	2.6	1.6
ALT (HGT) ft	1808 (1648)	1488 (1328)	1169 (1009)	849 (689)	529 (369)

PAGE INTENTIONALLY LEFT BLANK

**INSTRUMENT
APPROACH
CHART - ICAO**AERODROME ELEV 160'
HEIGHTS RELATED TO
THR RWY 25 - ELEV 160'

TRANSITION ALT 7000'

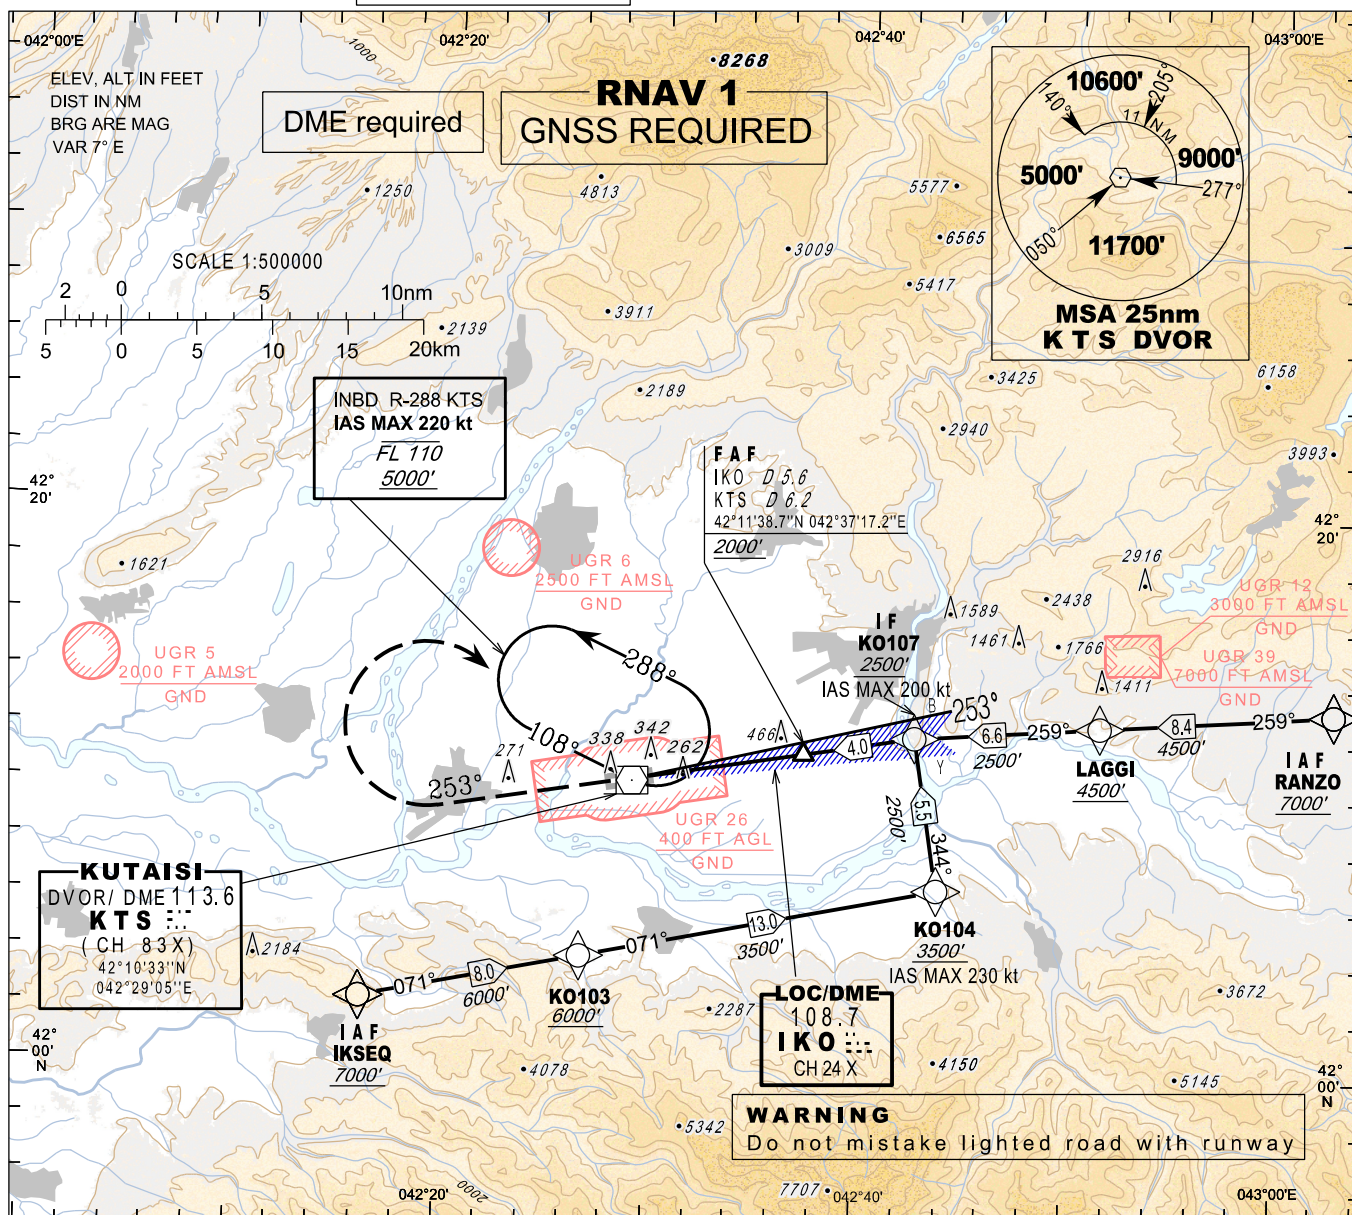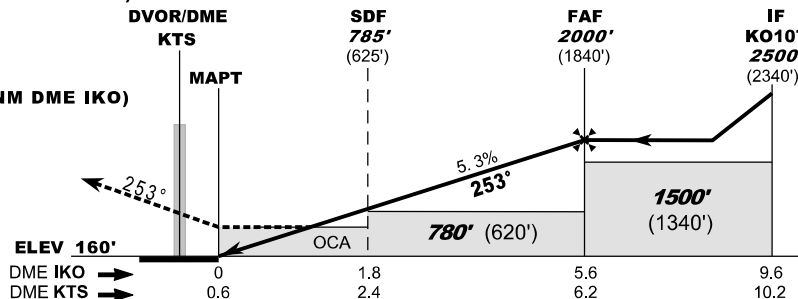APP 127.100
TWR 125.500**KUTAIISI/Kopitnari (UGKO)****LOCz
RWY 25****MISSED APPROACH****Normal:**Climb straight ahead to **3500'**, at **7 NM DME KTS (7.2 NM DME IKO)** turn right inbound **KTS** and follow **ATC** instructions.**KTS DVOR Unserviceable:**Climb straight ahead to **4500'**, expect vectoring.**Radio Communication Failure:**Climb straight ahead to **5000'**, at **7 NM DME KTS (7.2 NM DME IKO)** turn right inbound **KTS**, hold as published, when ready make new approach (ILS or LOC or VOR).Timing is not authorised
for defining the MAPT

Straight-in Approach	A	B	C	D
OCA(H)	510 (350)			

DME IKO NM	5	4	3	2	1
DME KTS NM	5.6	4.6	3.6	2.6	1.6
ALT (HGT) ft	1808 (1648)	1488 (1328)	1169 (1009)	849 (689)	529 (369)

Changes: Chart reissued

PAGE INTENTIONALLY LEFT BLANK

RNAV Transition Coding Tables - RWY 25 LOCz

IKSEQ transition										
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification	
	Identifier	Flyover	Coordinates				Level	Speed kt		
IF	IKSEQ	-	42°02'37.0"N 042°16'14.0"E	-	-	-	+A7000	-	RNAV1	
TF	KO103	-	42°04'15.0"N 042°26'45.0"E	071° (078.1°)	8.0	-	+A6000	-	RNAV1	
TF	KO104	-	42°06'52.0"N 042°43'48.0"E	071° (078.2°)	13.0	-	+A3500	-230	RNAV1	
TF	KO107	-	42°12'18.0"N 042°42'36.0"E	344° (350.7°)	5.5	-	+A2500	-200	RNAV1	

RANZO transition										
Path Terminator	Waypoint			Course/Track °MAG(°True)	DIST NM	Turn Direction	Constraints		Navigation Specification	
	Identifier	Flyover	Coordinates				Level	Speed kt		
IF	RANZO	-	42°13'23.0"N 043°02'44.0"E	-	-	-	+A7000	-	RNAV1	
TF	LAGGI	-	42°12'47.0"N 042°51'30.0"E	259° (265.9°)	8.4	-	+A4500	-	RNAV1	
TF	KO107	-	42°12'18.0"N 042°42'36.0"E	259° (265.9°)	6.6	-	+A2500	-200	RNAV1	


PAGE INTENTIONALLY LEFT BLANK

AERODROME ELEV 160'
HEIGHTS RELATED TO
THR RWY 07 - ELEV 133'


TRANSITION ALT 7000

APP	127.100
TWR	125.500

KUTASI/Kopitnari (UGKO)
VOR
RWY 07

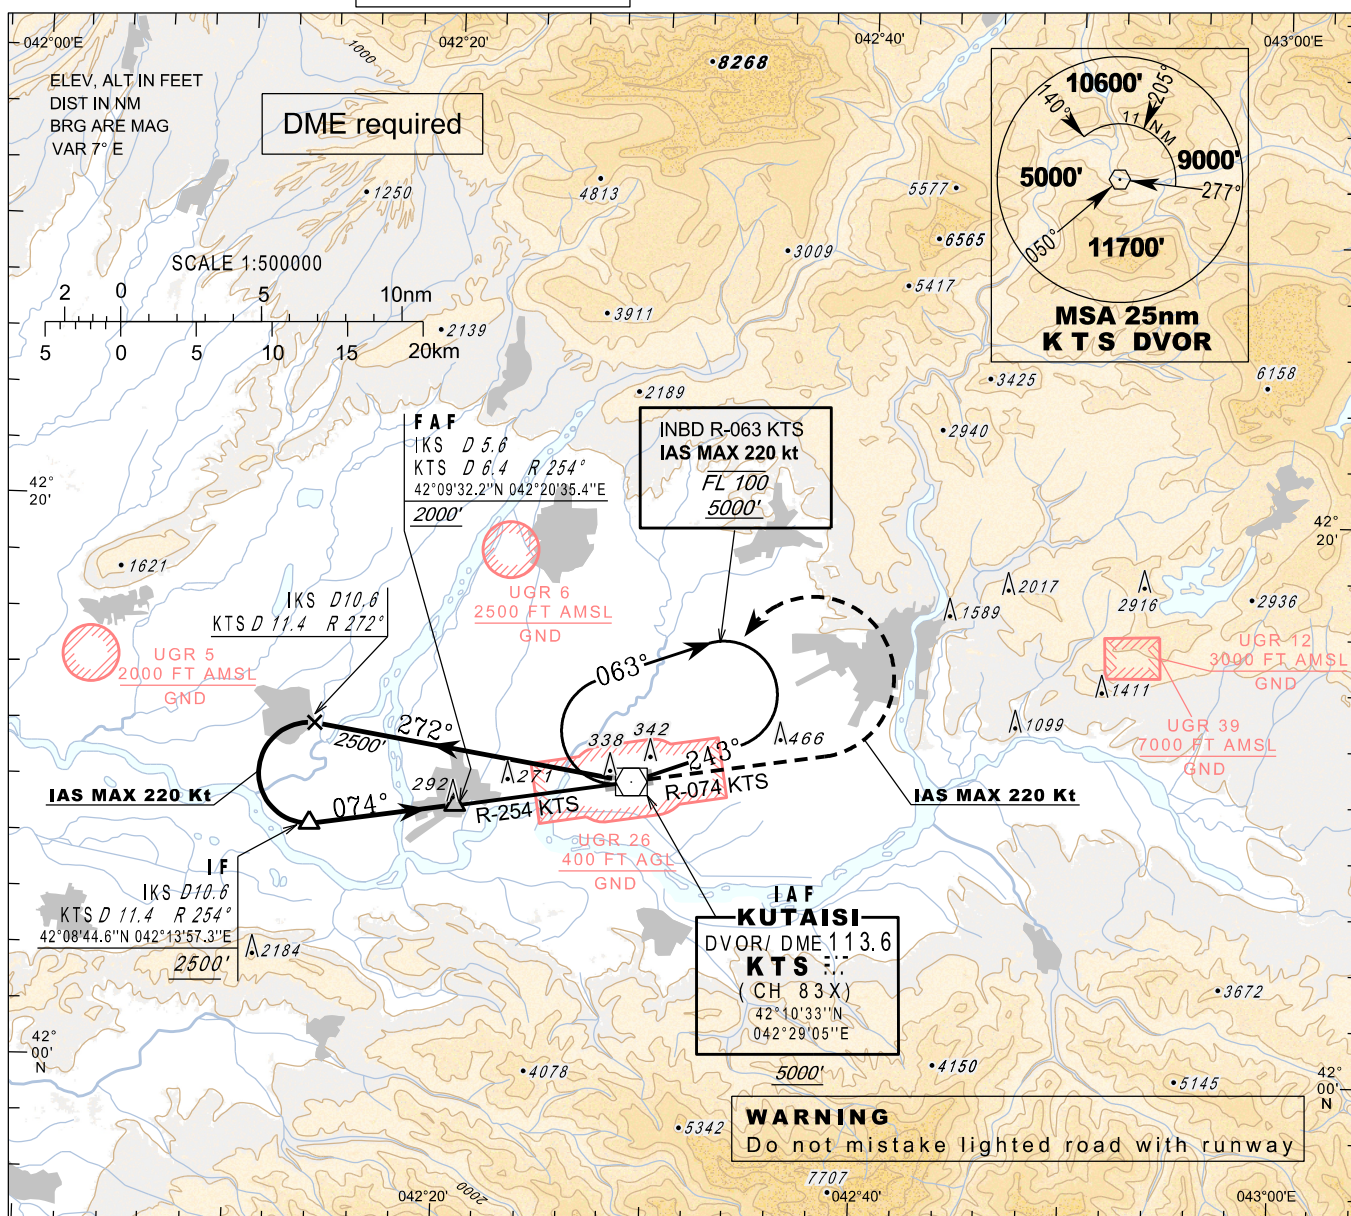

Radio Communication Failure:
Climb **5000'** on **R-074 KTS**, at **7 NM DME KTS (7.4 NM DME IKS)**
turn left inbound **KTS**, hold as published, when ready
make new approach. IAS MAX 220kt

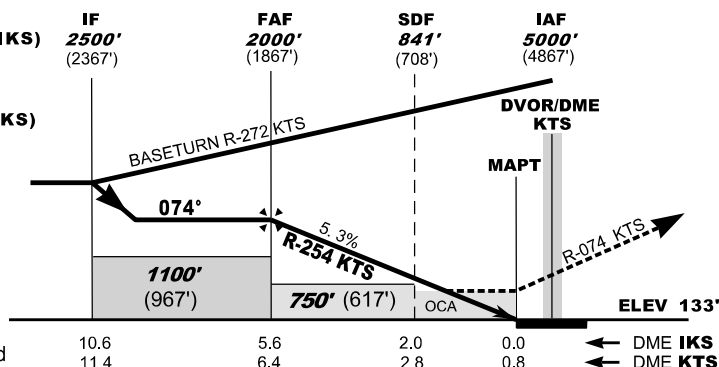

Straight-in Approach	A B C D	Timing is not authorised for defining the MAPT	10.6	5.6	2.0	0.0
OCA(H)	590 (460)		11.4	6.4	2.8	0.8
DME KTS NM	6	5	4	3	2	1
DME IKS NM	5.2	4.2	3.2	2.2	1.2	0.2
ALT (HGT) ft	1871 (1738)	1549 (1416)	1227 (1094)	905 (772)	583 (450)	261 (128)

Changes: Chart reissued


PAGE INTENTIONALLY LEFT BLANK

AERODROME ELEV 160'
HEIGHTS RELATED TO
THR RWY 25 - ELEV 160'

TRANSITION ALT 7000

APP	127.100
TWR	125.500


**VOR
RWY 25**

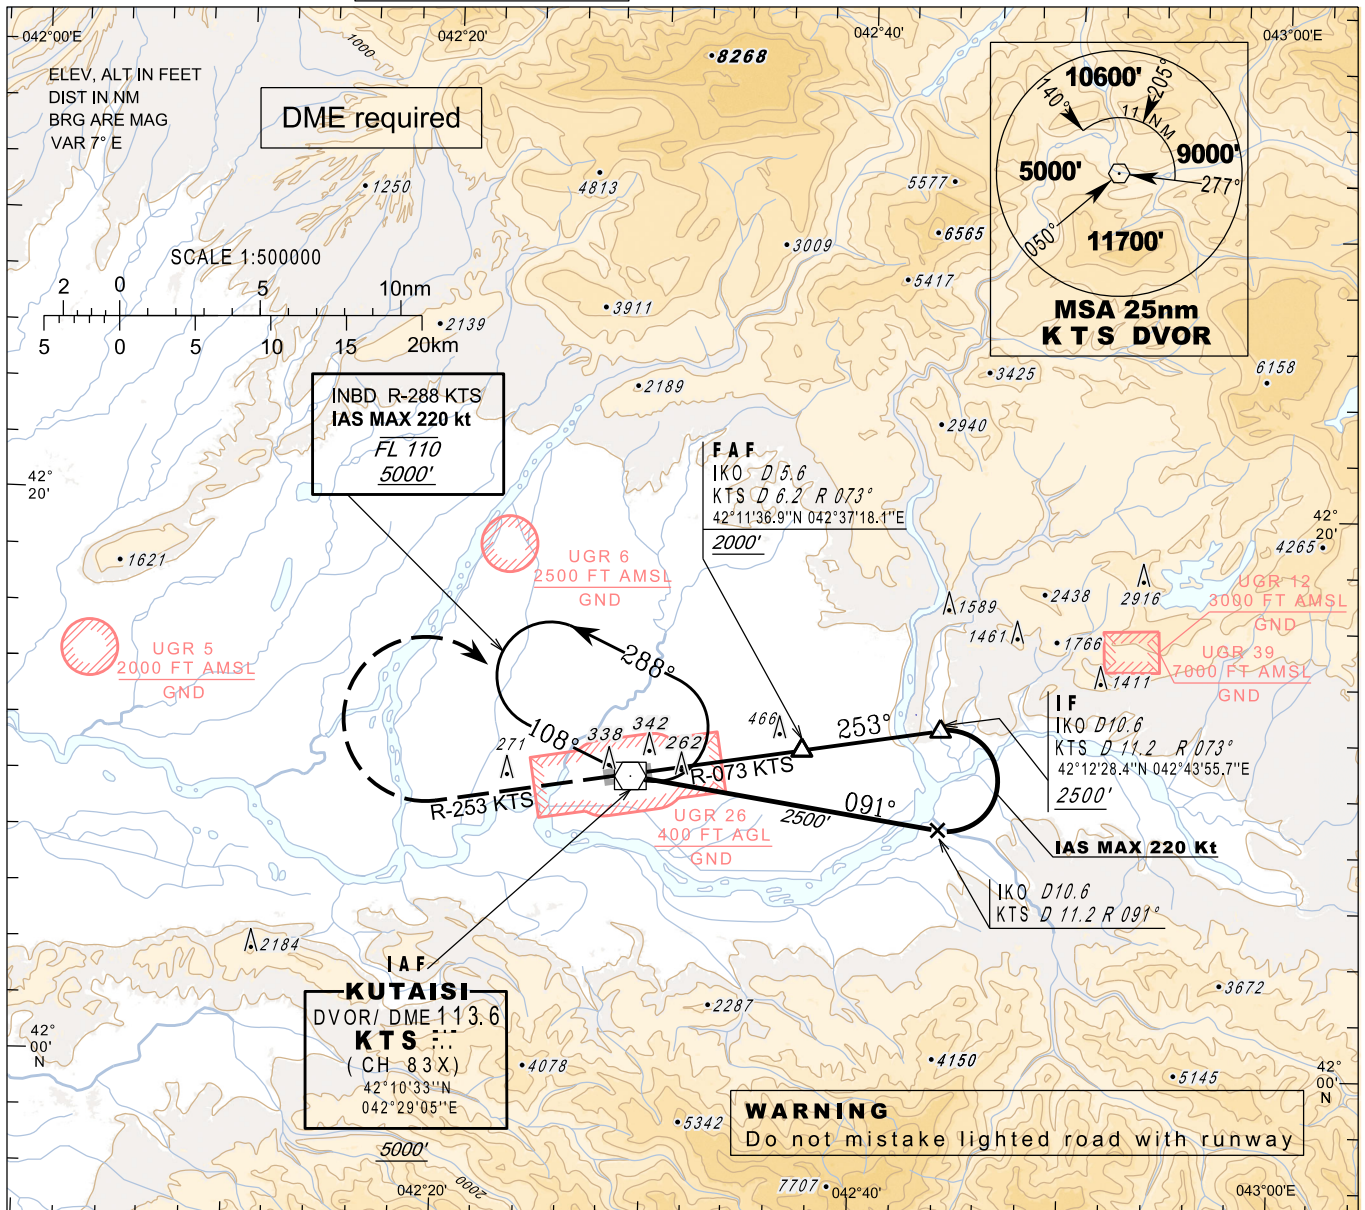

Normal:
Climb **3500'** on **R-253 KTS**, at **7 NM DME KTS (7.2 NM DME IKO)**
turn right inbound **KTS** and follow **ATC** instructions.

Radio Communication Failure:
Climb **5000'** on **R-253 KTS**, at **7 NM DME KTS (7.2 NM DME IKO)**
turn right inbound **KTS**, hold as published, when ready
make new approach.

Timing is not authorised
for defining the MAPT

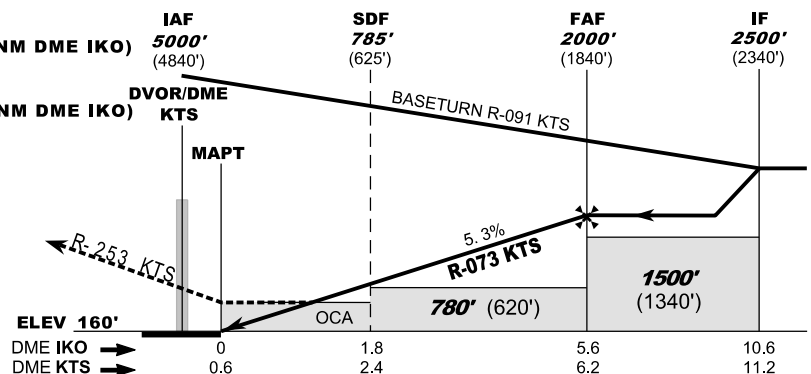


Straight-in Approach	A	B	C	D
OCA(H)	510	(350)	

DME KTS NM	6	5	4	3	2	1
DME IKO NM	5.4	4.4	3.4	2.4	1.4	0.4
ALT (HGT) ft	1936 (1776)	1617 (1457)	1297 (1137)	978 (818)	658 (498)	339 (179)

PAGE INTENTIONALLY LEFT BLANK

KUTALSI/Kopitnari (UGKO)

APP	127.100
TWR	125.500




PAGE INTENTIONALLY LEFT BLANK

**BIRD CONCENTRATIONS
AND MOVEMENT (INDEX CHART)**

KUTAISI/Kopitnari (UGKO)

Changes: Chart reissued

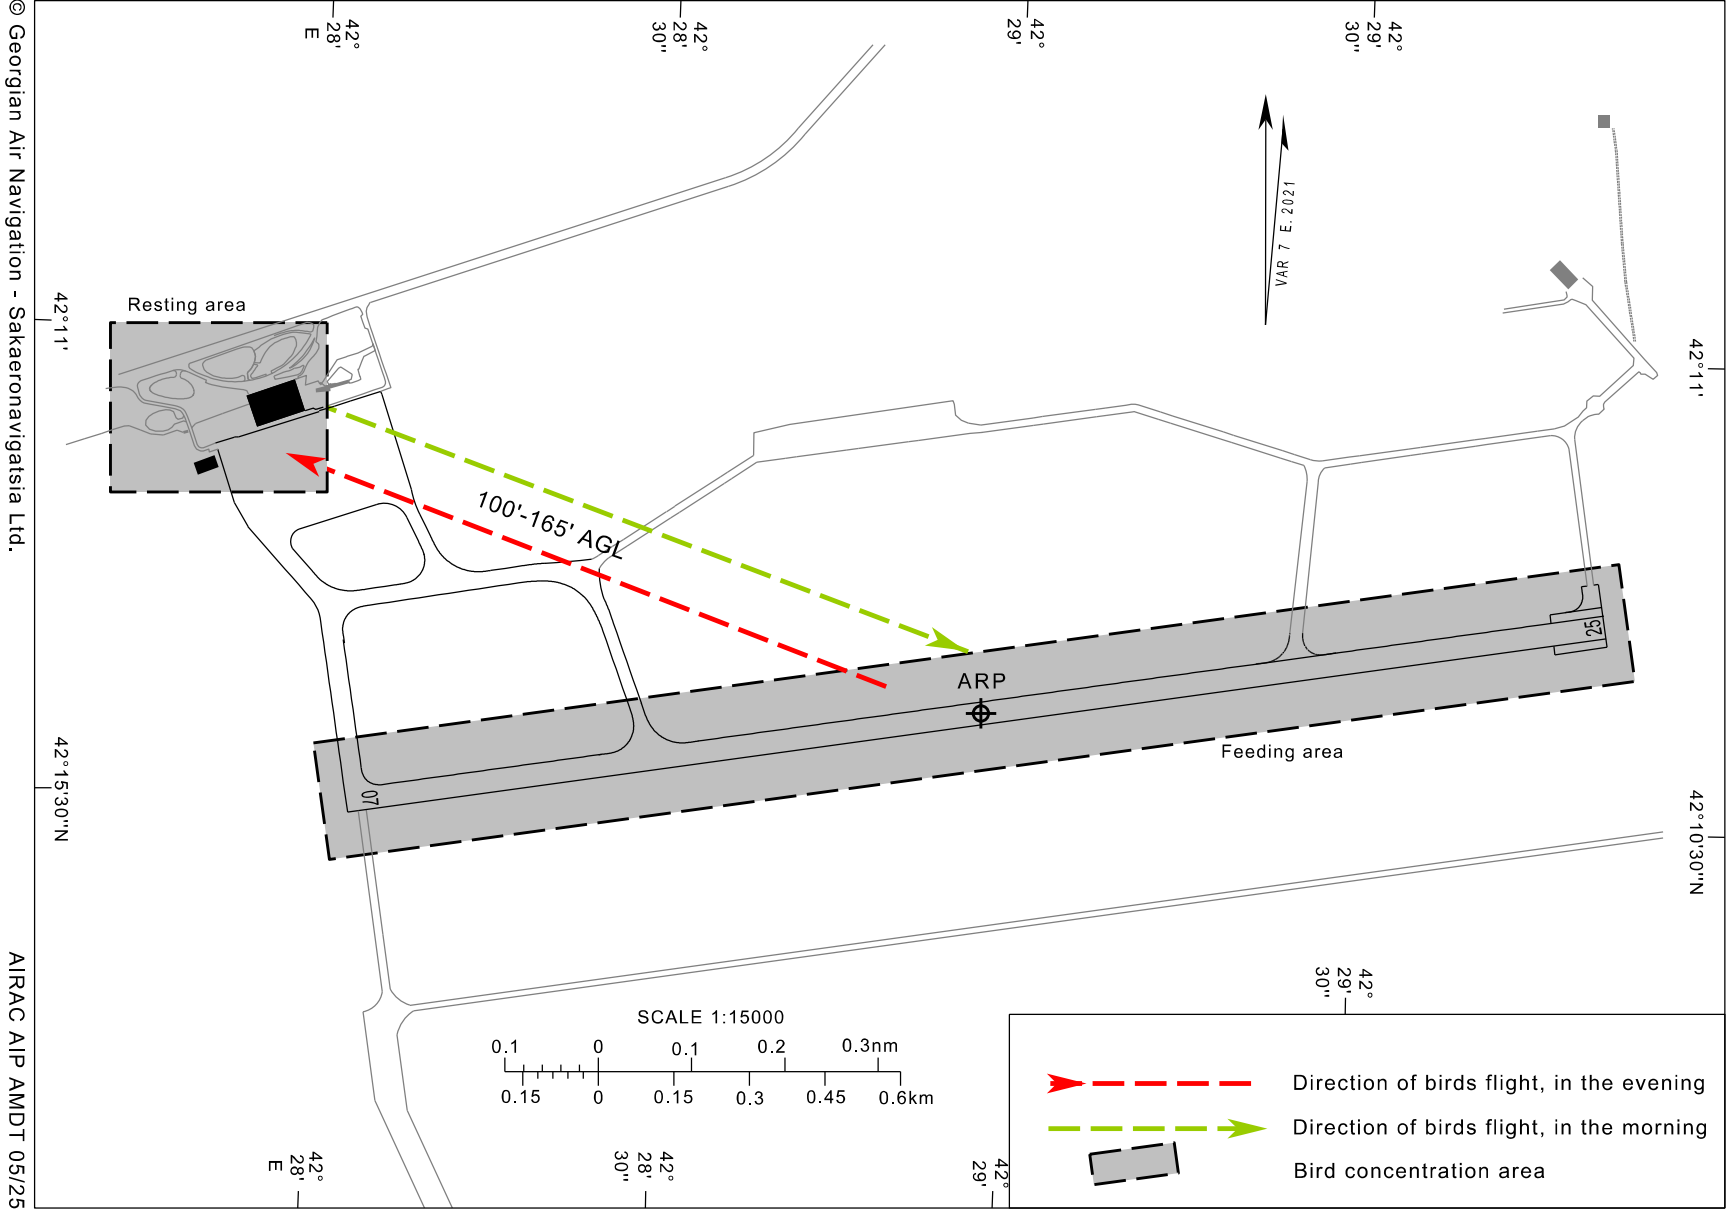

PAGE INTENTIONALLY LEFT BLANK